

Soft and Comfortable Signal Light Emitted through the Translucent Milky Lens



Common Specifications(QTR50/ QTR60/ QTR70)

- Modular LED steady/flashing signal tower lights
- Soft and comfortable signal light emitted through the translucent milky lens
- When the product is turned off the milky color filter provides comfortable viewing at close proximity for the operator
- Can select from size selections of Ø50mm, Ø60mm, and Ø70mm to fit your sophisticated application needs
- The addition of modules and change in color arrangement can be achieved without the use of tools by using the Lock-type structure
- QTRA type offers a nifty integrated lens and cover for a simple aesthetically pleasing product
- A variety of mounting brackets selections for the pole mount type to fit your location and mounting needs
- Built-in buzzer available (Volume : Max 85dB at 1m)
- Available in customized 2 sound buzzer type and high volume(105dB) buzzer type
- Can be used with NPN open collector transistor driven input, which allows direct connection to a PLC
- Flashing rate : 60-80 flashes/min.
- Materials : Lens-PC, Housing-ABS, Pole-Al
- Ambient operating temperature : -30°C to +50°C
- Protection rating: Standard type-IP65, Built-in buzzer type-IP54
- Certificates : CE Compliant, UL Listed
- Compliant with RoHS directive



• Each modular color lens can be added without additional tools

QTR model uses a special contact structure for stable operation, the lens modules lock into place by rotating the modular structures together. This allows for easy changes to the color arrangement without any tools. Additional modules can be added.



• QTR series special lens

QTR series provides soft and comfortable signal light emitted through the translucent milky lens.

• Buzzer volume is adjusted via the volume control lever

QTR type volume can be adjusted for each specific working condition with the equipped buzzer volume control lever at the bottom of the product.(-BZ type)

- 1 High volume buzzer (105dB) option can be fitted to the top of the product.**
High volume 105dB volume buzzer module fastened to the top of the product provides 360 degree buzzer signal output which cannot be achieved with the single directional buzzer.(Buzzer volume cannot be adjusted)
- 2 Integrated Housing cover and lens model (QTRA50/ QTRA60/ QTRA70)**
The sleek housing cover and lens model is made of one piece for a simple unified look.
- 3 Black Housing option available**
Products can be configured with the black housing and cover option. In addition, the buzzer option is also available in a black color housing and buzzer.
- 4 Can select from a variety of mounting bracket options to fit your application needs and build environment**
There are a variety of mounting bracket options available depending on cost and installation requirements.



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar



Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights




Electric Horn/
Speakers




Industrial
LED Lights

QTR50ML


Ø50mm LED Steady/Flashing Tower Lights



When Off



QTR50ML series

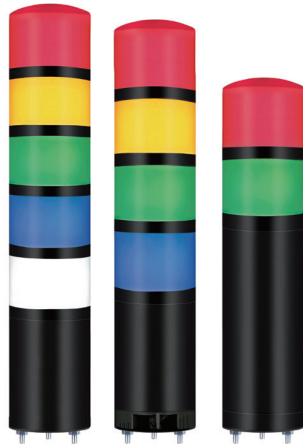

QTRA50ML series

• Customization



- High buzzer module equipped on top/ Black housing tower lights.

QTR50ML Ø50mm Direct Mount, LED Steady/Flashing Type

Model number	Layer	Voltage	Current	Certificates	Weight	Color
QTR50ML Steady	1	AC/DC12V	0.080A	CE DC only UL DC24V only	0.19kg	• R-Red
QTR50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.045A		0.19kg	
QTR50MLF Steady/Flashing	2	AC/DC12V	0.160A		0.27kg	• R-Red • G-Green
QTR50MLF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.090A		0.27kg	
QTRA50ML Steady	3	AC/DC12V	0.240A		0.36kg	• R-Red • A-Amber • G-Green
QTRA50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.135A		0.46kg	
QTRA50MLF Steady/Flashing	4	AC/DC12V	0.320A		0.44kg	• R-Red • A-Amber • G-Green • B-Blue
QTRA50MLF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.180A		0.44kg	
QTRA50MLF Steady/Flashing	5	AC/DC12V	0.400A		0.53kg	• R-Red • A-Amber • G-Green • B-Blue • W-White
QTRA50MLF-BZ Steady/Flashing /w built-in buzzer		AC/DC24V	0.225A		0.53kg	
		AC110V-220V	Max 0.045A		0.29kg	
		AC110V-220V	Max 0.065A		0.37kg	
		AC110V-220V	Max 0.080A		0.46kg	
		AC110V-220V	Max 0.100A		0.54kg	
		AC110V-220V	Max 0.120A		0.63kg	

※ AC type model has a free-voltage range of 100V-240V.

Signal/ Audible Line Current(per each layer)

Voltage	AC/DC12V	AC/DC24V	AC110V-220V
Signal line current	0.080A	0.045A	Max 0.045A
Audible line current	0.016A	0.031A	Max 0.030A

Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
- Signal line standard : UL1007 AWG22(0.3sq) 400mm
- LED tower light can be wiring with external contact and transistor
- ※ Please refer to page 323-324 for detailed wiring instructions.

Customization

- High buzzer module equipped on top(Lens should be 4 layers or less)
- Black housing tower lights
- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall mount



Ordering Specification

QTR50ML	-	3	-	12	-	RAG
[Model number]		[Layer]		[Voltage]		[Color]
<ul style="list-style-type: none"> • QTR50ML • QTR50ML-BZ • QTR50MLF • QTR50MLF-BZ • QTRA50ML • QTRA50ML-BZ • QTRA50MLF • QTRA50MLF-BZ 		<ul style="list-style-type: none"> • 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers 		<ul style="list-style-type: none"> • 12-DC12V • 24-DC24V • 110/220 • -AC110V-220V 		<ul style="list-style-type: none"> • R-Red • A-Amber • G-Green • B-Blue • W-White

QTR series

LED Steady/Flashing Tower Lights



Technical Diagram

(Units : mm)

QTR50ML : DC
QTR50MLF : DC
QTR50ML-BZ : DC



QTR50ML : AC
QTR50MLF-BZ : DC

QTR50MLF : AC
QTR50ML-BZ : AC
QTR50MLF-BZ : AC

QTR50L : DC
QTR50LF : DC
QTR50L-BZ : DC

QTR50L : AC
QTR50LF-BZ : DC

QTR50LF : AC
QTR50L-BZ : AC
QTR50LF-BZ : AC

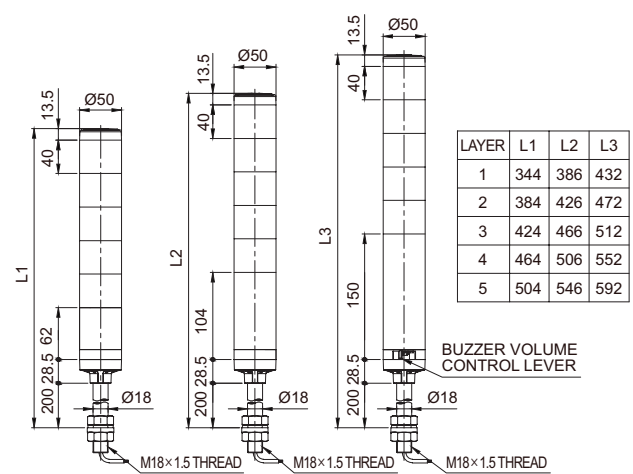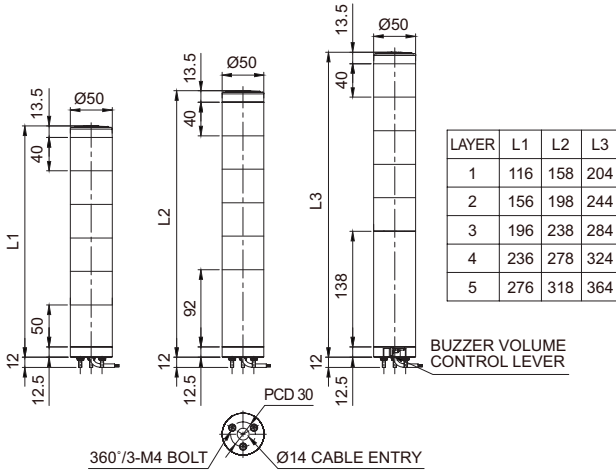

QTR60ML : DC
QTR60MLF : DC
QTR60ML-BZ : DC



QTR60ML : AC
QTR60MLF-BZ : DC

QTR60MLF : AC
QTR60ML-BZ : AC
QTR60MLF-BZ : AC

QTR60L : DC
QTR60LF : DC
QTR60L-BZ : DC

QTR60L : AC
QTR60LF-BZ : DC

QTR60LF : AC
QTR60L-BZ : AC
QTR60LF-BZ : AC

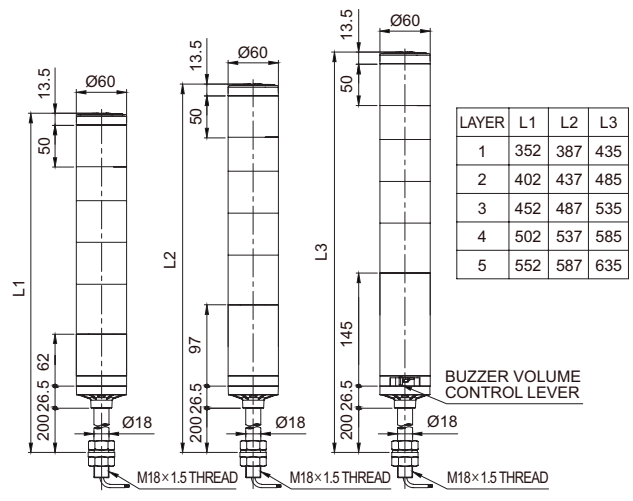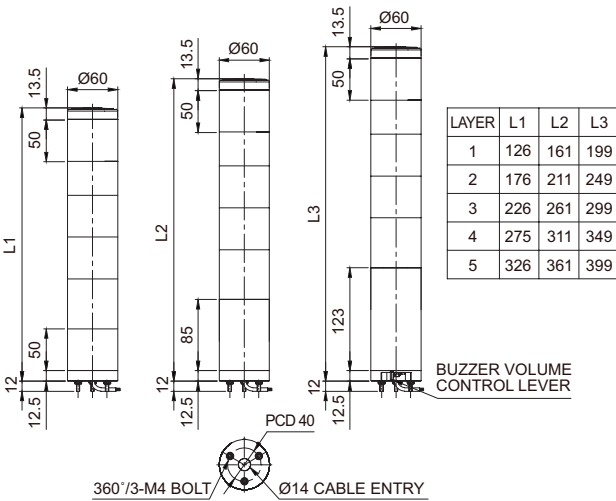

QTR70ML : DC
QTR70MLF : DC
QTR70ML-BZ : DC



QTR70ML : AC
QTR70MLF : AC
QTR70ML-BZ : AC
QTR70MLF-BZ : DC

QTR70MLF-BZ : AC

QTR70L : DC
QTR70LF : DC
QTR70L-BZ : DC

QTR70L : AC
QTR70LF : AC
QTR70L-BZ : AC
QTR70LF-BZ : DC

QTR70LF-BZ : AC

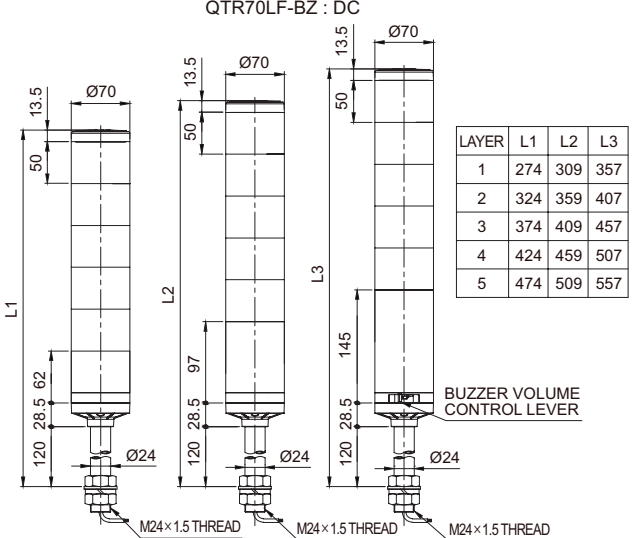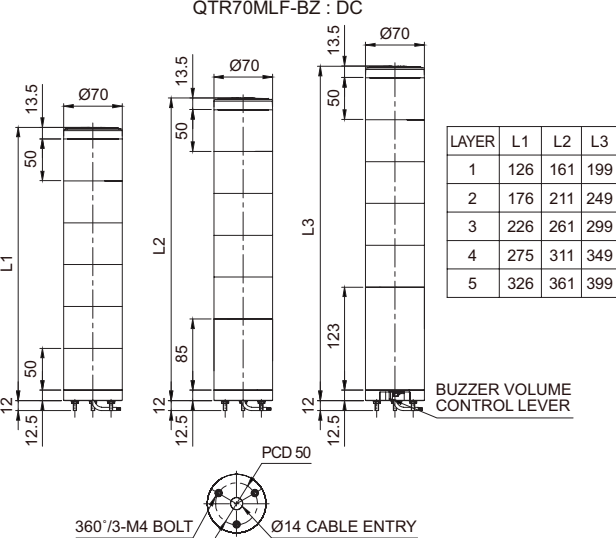

QTG/QTC/QTR series

LED Steady/Flashing Tower Lights



Wiring Instructions(using external contact)

• In case of wiring with external contact, please select the proper transistor type : either NPN or PNP based on the source voltage setting.

Applied products	Wiring Instructions	Applied products	Wiring Instructions
DC Steady QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L	<p>EXTERNAL CONTACT</p> <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	AC Steady QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L	<p>EXTERNAL CONTACT</p> <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>
DC Steady/Flashing QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF	<p>EXTERNAL CONTACT</p> <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	AC Steady/Flashing QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF	<p>EXTERNAL CONTACT</p> <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>

- DC steady type : External power/ signal line standard : UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type : External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
External signal line standard : UL1007 AWG22(0.3sq) 400mm



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar



Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights



Electric Horn/
Speakers



Industrial
LED Lights





QTG/QTC/QTR series

LED Steady/Flashing Tower Lights



Wiring Instructions(using external contact)

• In case of wiring with transistors, please select the proper transistor type : either NPN or PNP based on the source voltage setting.

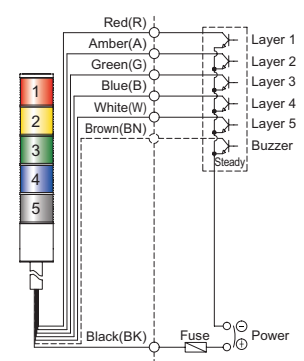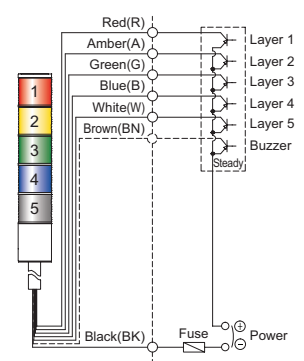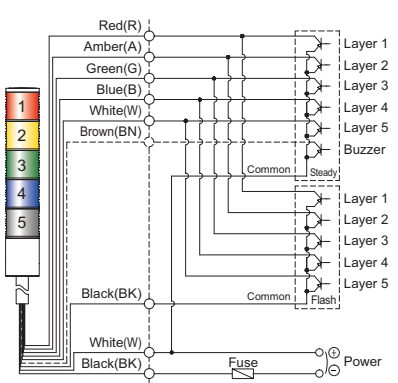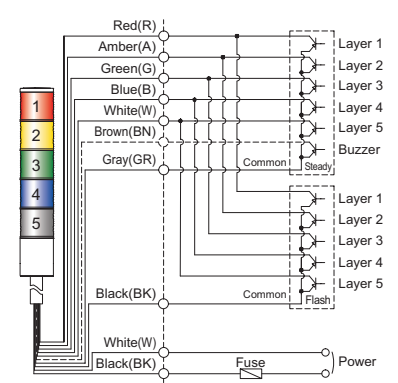Applied products	Wiring Instructions	
<p>DC Steady</p> <p>QTG50ML QTG50L QTG60ML QTG60L QTG70ML QTG70L QTC50ML QTC50L QTC60ML QTC60L QTC70ML QTC70L QTR50ML QTR50L QTR60ML QTR60L QTR70ML QTR70L</p>	<p>EXTERNAL TRANSISTOR-NPN</p>  <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	<p>EXTERNAL TRANSISTOR-PNP</p> 
<p>DC Steady/Flashing</p> <p>QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF</p>	<p>EXTERNAL TRANSISTOR-PNP</p>  <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>	<p>AC Steady/Flashing</p> <p>QTG50MLF QTG50LF QTG60MLF QTG60LF QTG70MLF QTG70LF QTC50MLF QTC50LF QTC60MLF QTC60LF QTC70MLF QTC70LF QTR50MLF QTR50LF QTR60MLF QTR60LF QTR70MLF QTR70LF</p> <p>EXTERNAL TRANSISTOR-PNP</p>  <ul style="list-style-type: none"> • QTG(A)XX(M)L - Same wiring including buzzer type • QTC(A)XX(M)L - Same wiring including buzzer type • QTR(A)XX(M)L - Same wiring including buzzer type • QTGXXL • QTCXXL • QTRXXL <p>└ Lens diameter 50(50mm) : QTR50(M)L 60(60mm) : QTR60(M)L 70(70mm) : QTR70(M)L</p>

- DC steady type : External power/ signal line standard : UL1007 AWG22(0.3sq) 400mm
- AC steady, AC/DC steady/flashing type : External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
External signal line standard : UL1007 AWG22(0.3sq) 400mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Indicators & Alerts](#) category:

Click to view products by [QLIGHT](#) manufacturer:

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B](#) [LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)