


# Thermocouple Wire

## Duplex Insulated

**"SLE" Special  
Limits of Error  
Available**

**ANSI  
color  
code  
shown**    **To order  
IEC color  
code visit  
us online**

**K** Duplex Insulated  
**CHROMEGA®-ALOMEGA®**  
Duplex ANSI Type K

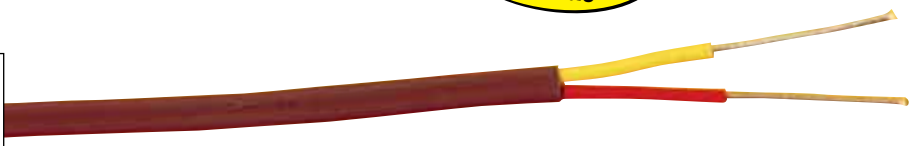

**ANSI Color Code:** Positive Wire, Yellow; Negative Wire, Red; Overall, Brown  
OMEGA Engineering does not use reprocessed PFA or PVC in manufacturing thermocouple wire

Insulation	AWG No.	Model Number	Type Wire	Insulation		Max. Temp		Nominal Size mm (inch)	Wt.† kg/300 m (lb/1000')
				Conductor	Overall	°C	°F		
Ceramic*	14	<b>XC-K-14</b>	Solid	Nextel Ceramic	Nextel Ceramic	1090	2000	3.6 x 5.0 (0.140 x 0.200)	18 (38)
	20	<b>XC-K-20</b>	Solid			980	1800	3.4 x 4.8 (0.135 x 0.190)	8 (16)
	20	<b>XT-K-20</b>	Solid			980	1800	2.7 x 3.9 (0.105 x 0.155)	7 (15)
	20	<b>XL-K-20</b>	Solid			980	1800	2.4 x 3.4 (0.095 x 0.135)	7 (14)
	24	<b>XC-K-24</b>	Solid			870	1600	2.9 x 4.4 (0.115 x 0.175)	6 (12)
	24	<b>XT-K-24</b>	Solid			870	1600	2.2 x 3.4 (0.088 x 0.132)	5 (11)
	24	<b>XL-K-24</b>	Solid			870	1600	2.0 x 3.0 (0.078 x 0.116)	5 (10)
Vitreous Silica*	20	<b>XR-K-20</b>	Solid	Refrasil	Refrasil	870	1600	2.9 x 4.6 (0.115 x 0.180)	6 (14)
Silica*	14	<b>XS-K-14</b>	Solid	Silica	Silica	1090	2000	3.6 x 5.0 (0.140 x 0.200)	16 (35)
	20	<b>XS-K-20</b>	Solid			980	1800	2.7 x 3.9 (0.105 x 0.155)	6 (12)
	24	<b>XS-K-24</b>	Solid			870	1600	2.2 x 3.4 (0.088 x 0.132)	5 (10)
High Temp. Glass**	20	<b>HH-K-20</b>	Solid	High Temp Glass	High Temp Glass	871	1600	1.5 x 2.7 (0.060 x 0.105)	4 (9)
	24	<b>HH-K-24</b>	Solid			871	1600	1.4 x 2.3 (0.055 x 0.090)	3 (5)
Glass	20	<b>GG-K-20</b>	Solid	Glass Braid	Glass Braid	482	900	1.5 x 2.1 (0.060 x 0.095)	4 (9)
	20S	<b>GG-K-20S</b>	7 x 28			482	900	1.5 x 2.5 (0.060 x 0.100)	4 (9)
	24	<b>GG-K-24</b>	Solid			482	900	1.3 x 2.0 (0.050 x 0.080)	3 (5)
	24S	<b>GG-K-24S</b>	7 x 32			482	900	1.3 x 2.2 (0.050 x 0.085)	3 (5)
	26	<b>GG-K-26</b>	Solid			482	900	1.1 x 1.9 (0.045 x 0.075)	2 (4)
	28	<b>GG-K-28</b>	Solid			482	900	1.0 x 1.4 (0.040 x 0.055)	2 (3)
	30	<b>GG-K-30</b>	Solid			482	900	0.9 x 1.3 (0.037 x 0.050)	2 (3)
	36	<b>GG-K-36</b>	Solid			482	900	0.8 x 1.1 (0.033 x 0.045)	1 (2)
Glass with Stainless Steel Overbraid	20	<b>GG-K-20-SB</b>	Solid	Glass	Stainless Steel Braid over Glass	482	900	2.3 x 3.0 (0.090 x 0.120)	6 (14)
	20S	<b>GG-K-20S-SB</b>	7 x 28			482	900	2.3 x 3.2 (0.090 x 0.127)	7 (15)
	24	<b>GG-K-24-SB</b>	Solid			482	900	2.2 x 3.0 (0.085 x 0.117)	5 (11)
	24S	<b>GG-K-24S-SB</b>	7 x 32			482	900	2.0 x 2.8 (0.080 x 0.110)	5 (11)
Kapton Fused Polyimide Tape	20	<b>KK-K-20</b>	Solid	Fused Polyimide Tape	Fused Polyimide Tape	260	500	1.5 x 2.5 (0.060 x 0.100)	5 (11)
	20S	<b>KK-K-20S</b>	7 x 28			260	500	1.5 x 2.7 (0.060 x 0.105)	5 (11)
	24	<b>KK-K-24</b>	Solid			260	500	1.3 x 1.9 (0.050 x 0.075)	3 (6)
	24S	<b>KK-K-24S</b>	7 x 32			260	500	1.3 x 2.2 (0.050 x 0.085)	3 (6)
	30	<b>KK-K-30</b>	Solid			260	500	1.0 x 1.4 (0.040 x 0.055)	3 (5)
PFA Glass	30	<b>TG-K-30</b>	Solid	PFA	Glass Braid	260	500	0.9 x 1.2 (0.034 x 0.047)	1 (2)
	36	<b>TG-K-36</b>	Solid			260	500	0.7 x 1.0 (0.028 x 0.038)	1 (2)
	40	<b>TG-K-40</b>	Solid			260	500	0.7 x 0.9 (0.026 x 0.035)	1 (2)
Neoflon PFA (High Performance)	20	<b>TT-K-20</b>	Solid	PFA	PFA	260	500	1.7 x 3.0 (0.068 x 0.116)	5 (11)
	20	<b>TT-K-20S</b>	7 x 28			260	500	1.9 x 3.2 (0.073 x 0.126)	5 (11)
	22	<b>TT-K-22S</b>	7 x 30			260	500	1.7 x 3.4 (0.065 x 0.133)	4 (9)
	24	<b>TT-K-24</b>	Solid			260	500	1.4 x 2.4 (0.056 x 0.093)	3 (6)
	24	<b>TT-K-24S</b>	7 x 32			260	500	1.6 x 2.6 (0.063 x 0.102)	3 (6)
	30	<b>TT-K-30††</b>	Solid			260	500	0.6 x 1.0 (0.024 x 0.040)	1 (2)
	36	<b>TT-K-36††</b>	Solid			260	500	0.5 x 0.8 (0.019 x 0.030)	1 (2)
40	<b>TT-K-40††</b>	Solid	260	500	0.4 x 0.7 (0.017 x 0.026)	1 (2)			
PFA Polymer w/Twisted and Shielded Conductors	20	<b>TT-K-20-TWSH</b>	Solid	PFA Polymer	PFA Polymer and Shielding	260	500	3.7 (0.15)	9 (20)
	20S	<b>TT-K-20S-TWSH</b>	7 x 28			260	500	3.8 (0.15)	9 (20)
	24	<b>TT-K-24-TWSH</b>	Solid			260	500	2.7 (0.11)	4 (9)
	24S	<b>TT-K-24S-TWSH</b>	7 x 32			260	500	2.9 (0.12)	4 (9)
Neoflon FEP	20	<b>FF-K-20</b>	Solid	FEP	FEP	200	392	1.7 x 3.0 (0.068 x 0.116)	5 (11)
	24	<b>FF-K-24</b>	Solid			200	392	1.7 x 3.0 (0.056 x 0.092)	3 (6)
FEP Polymer w/Twisted and Shielded Conductors	20	<b>FF-K-20-TWSH</b>	Solid	FEP Polymer	FEP Polymer and Shielding	200	392	3.7 (0.15)	9 (20)
	20S	<b>FF-K-20S-TWSH</b>	7 x 28			200	392	3.8 (0.15)	9 (20)
	24	<b>FF-K-24-TWSH</b>	Solid			200	392	2.7 (0.11)	4 (9)
	24S	<b>FF-K-24S-TWSH</b>	7 x 32			200	392	2.9 (0.12)	4 (9)
TFE Tape Polymer	20	<b>TFE-K-20</b>	Solid	TFE Tape Polymer	Fused TFE Tape Polymer	260	500	1.5 x 2.5 (0.060 x 0.100)	5 (11)
	20S	<b>TFE-K-20S</b>	7 x 28			260	500	1.5 x 2.7 (0.060 x 0.105)	5 (11)
	24	<b>TFE-K-24</b>	Solid			260	500	1.3 x 1.9 (0.050 x 0.075)	3 (6)
	24S	<b>TFE-K-24S</b>	7 x 32			260	500	1.3 x 2.2 (0.050 x 0.085)	3 (6)
Polyvinyl	24	<b>PR-K-24</b>	Solid	Polyvinyl	(Rip Cord)*** (Polyvinyl)	105	221	1.4 x 2.3 (0.050 x 0.086)	3 (5)
	24	<b>PP-K-24S</b>	7 x 32			105	221	2.0 x 3.4 (0.082 x 0.134)	3 (5)

† Weight of spool and wire rounded to the next highest kg (lb) (does not include packing material). †† Overall color clear.  
 ††† To order special limits of error wire, add **"SLE"** to model number before spool length. \* Has color tracers on jacket and conductors.  
 \*\* HH Wire has trace thread in positive leg, negative leg is red, overall has trace thread. \*\*\* Two insulated leads bonded together, but with no overwrap.  
 Additional Type K insulated wires are available. See Fused Tape Insulated TFE-K and KK-K Series.  
**Ordering Example:** **XC-K-20-SLE-1000**, 1000' (300 m) of Type K duplex insulated special limits of error thermocouple wire.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [newport manufacturer](#):*

Other Similar products are found below :

[BDS1](#) [BDT1](#) [WTK-14-36/N](#) [5TC-TT-J-24-72](#) [TXDIN70](#) [OTP-U-F](#) [5SC-TT-K-30-36](#) [WTK-8-24/N](#) [TPJ-U-F](#) [OTP-U-M](#) [5TC-TT-J-24-50/N](#)  
[5SC-TT-T-30-72](#) [SMTC-AL-P](#) [SMPW-CC-T-M](#) [MPJ-K-F-ROHS](#)