

**A Wide Range In Short Words**





# Infinion Technologies AG

gen und unterbrechungsfreie Stromversorgungen.

Eine wichtige Erweiterung des Produktportfolios,

sind IGBT-Treiber, die unter dem Markennamen

*EicedRIVER™* angeboten werden. *EicedRIVER™* ist

unterteilt in zwei wesentliche Produktkategorien, ICS

(als Coreless Transformert) und Boards. Weitere Infor-

mationen erhalten Sie unter

[www.infineon.com/gatedriver](http://www.infineon.com/gatedriver).

Dank der starken Position auf dem Markt ist es

Infinion möglich, erheblich in Forschung und Entwick-

lung zu investieren. Darüber hinaus erbringen die enge

Zusammenarbeit mit dem Fachbereich Forschung und

Entwicklung von Infinion Technologies und weltweit

führenden Fabriken zur Chipherstellung Synergieeffek-

te, die sich für alle Beteiligten zum Vorteil auswirken.

Risikobereitschaft, Experimentierfreude und unkon-

ventionelles Denken der Mitarbeiter sind die Basis für

die Ideen zu neuen Produkten und immer besseren Lö-

sungen für unsere Kunden. Das drückt sich auch in un-

serem Slogan "never stop thinking" aus.

Infinion hat mit seinen Produktinnovationen

weltweit industrielle Standards gesetzt. Dabei stehen

Kundennutzen und Kundenzufriedenheit stets im Focus

und sind Bestandteil des Unternehmensleitbildes.

Die Leistungshalbleiter der Infinion werden in leis-

tungselektronischen Anwendungen von etwa 0,5 kV

bis über 1 Gigawatt eingesetzt; typischerweise in fol-

genden Anwendungsgebieten:

**Antriebe:** Walzwerke, Druckmaschinen, Werkzeug-

maschinen, Haushaltsanwendungen von 0,5 kW bis

über 1 MW.

**Traktion:** Bahnantriebe, Bord-Stromversorgungen, Bat-

teriefahrzeuge.

**Metallbearbeitung:** Schweißtechnik, induktive Erwär-

mung, Lasieranwendungen.

**Energienetze:** Hochspannungs-Gleichstrom-Übertra-

gungs-Systeme, Hochspannungs-Leistungs-Kompensa-

tion.

**Stromversorgung:** Medizinische Geräte, dezentrale

Energieversorgungssysteme, statische Stromversorgun-

gen und unterbrechungsfreie Stromversorgungen.

Eine wichtige Erweiterung des Produktportfolios,

sind IGBT-Treiber, die unter dem Markennamen

*EicedRIVER™* angeboten werden. *EicedRIVER™* ist

unterteilt in zwei wesentliche Produktkategorien, ICS

(als Coreless Transformert) und Boards. Weitere Infor-

mationen erhalten Sie unter

[www.infineon.com/gatedriver](http://www.infineon.com/gatedriver).

Basierend auf seiner starken Position, Infinion ist abie-

to invest in research and development to a high extent.

Important synergy effects, which are to everybody's

benefit, are obtained by the close co-operation with

the research and development area of Infinion

Technologies and by the collaboration with worldwide

leading waterfabs.

Motivated, dedicated, and flexible employees are

the basis for new ideas which will lead to new products

and to further improved solutions for our customers.

This is what our slogan "never stop thinking" illustrates.

# Infinion Technologies AG

Infinion's High Power semiconductors are used for

applications in the power range of 0,5 kW up to more

than 1 giga watt; typical application areas are:

**Drives:** Rolling mills, presses, machine tools, house-

hold appliances of 0,5 kW up to more than 1 MW.

**Traction:** Railway drives, power supplies, battery

vehicles;

**Metal processing:** Welding, inductive heating, laser

applications;

**Energy networks:** High voltage d.c. transmission

systems, high voltage power compensation.

**Power supply:** Medical equipment, de-centralised

power supply units, static power supplies, and UPS.

An important extension of our product portfolio is

the family of IGBT-drivers, called *EicedRIVER™*. The



Further data sheets are available on request:  
 IGBT-Modules  
 PIM Modules  
 Thyristor-/Diode-Modules  
 Fast Thyristors  
 Thyristors for Phase Control  
 Power Rectifier Diodes  
 Snubber and Freewheeling Diodes  
 Actual, extensive data can be obtained in PDF-format  
 from our internet address:  
[www.infineon.com/powersemiconductors](http://www.infineon.com/powersemiconductors)

**Page Content**

48 Pulsed Power Applications  
 49 Phase Control Thyristors  
 54 Fast Thyristors  
 54 PIM Modules  
 55 Thyristor-/Diode-Modules  
 56 Fast Thyristors  
 57 Thyristors for Phase Control  
 60 Power Rectifier Diodes  
 61 Freewheeling Diodes  
 60 Snubber Diodes  
 62 Fast Rectifier Diodes  
 64 Avalanche Rectifier Diodes  
 64 Welding Diodes  
 64 Insulated Cells  
 65 Possible Combinations of Presspacks and Heatsinks  
 65 ModSTACK™  
 66 PrimeSTACK  
 70 Outlines  
 70 Heatsinks  
 70 ModSTACK™  
 79 PrimeSTACK  
 83 IGBT Modules  
 89 IGBT Modules  
 105 EasyBRIDGE  
 106 EconoBRIDGE™ Rectifier  
 107 IsoPACK™ Bridge Rectifier and AC-Switches  
 108 PowerBLOCKs  
 110 Presspacks  
 123 *EiceDRIVER™* Board  
 125 Accessories  
 125 Mounting Hardware for EasyPIM™, EasyPACK, EasyBRIDGE, EasyDUAL Modules  
 126 Gate Leads for PowerBLOCK Thyristor Modules  
 127 Standard Gate Leads for Disc Type Devices  
 128 Clamping Force and Disc Diameter  
 130 Explanations  
 130 Letter Symbols  
 132 Type Designations  
 134 Package Units  
 136 Certificates  
 137 Contact Worldwide  
 140 Terms and conditions of delivery


**Page Content**

3 Presentation  
 7 Overview IGBT  
 7 Low Power  
 8 EasyPIM™ Power Integrated Modules  
 11 EasyPACK  
 13 EasyDUAL  
 14 EasyFourPACK  
 15 EconoPIM™ Power Integrated Modules  
 17 EconoPACK™  
 19 *Medium Power*  
 19 34 mm and 62 mm Modules  
 22 EconoPACK™+  
 22 EconoDUAL™  
 23 *High Power*  
 23 PrimePACK™ Modules  
 24 IGBT Modules IHM  
 24 IGBT Modules IHV  
 26 IGBT Modules IHV  
 27 Diode Modules  
 28 *Drivers*  
 28 *EiceDRIVER™* IC  
 29 *EiceDRIVER™* Board  
 30 SCR/Diode Modules  
 30 Bridge Rectifier / AC Switches  
 33 EasyBRIDGE  
 33 EconoBRIDGE™  
 34 IsoPACK™  
 35 Overview PowerBLOCK Thyristor Modules for Phase Control  
 36 PowerBLOCK Thyristor Modules for Phase Control  
 37 PowerBLOCK Single Thyristor Modules for Phase Control  
 38 Overview PowerBLOCK Thyristor/Diode Modules for Phase Control  
 39 PowerBLOCK Thyristor/Diode Modules for Phase Control  
 40 Overview PowerBLOCK Diodes/Thyristor Modules for Phase Control  
 41 PowerBLOCK Diode/Thyristor Modules for Phase Control  
 42 Overview PowerBLOCK Diode Modules for Phase Control  
 43 PowerBLOCK Rectifier Diode Modules for Phase Control  
 44 PowerBLOCK Fast Thyristor Modules  
 45 PowerBLOCK Fast Asymmetric Thyristor Modules  
 46 PowerBLOCK Fast Diode Modules  
 47 Presspacks  
 47 Overview Phase Control Thyristors in Disc Housings



Overview IGBT's

P [kW]

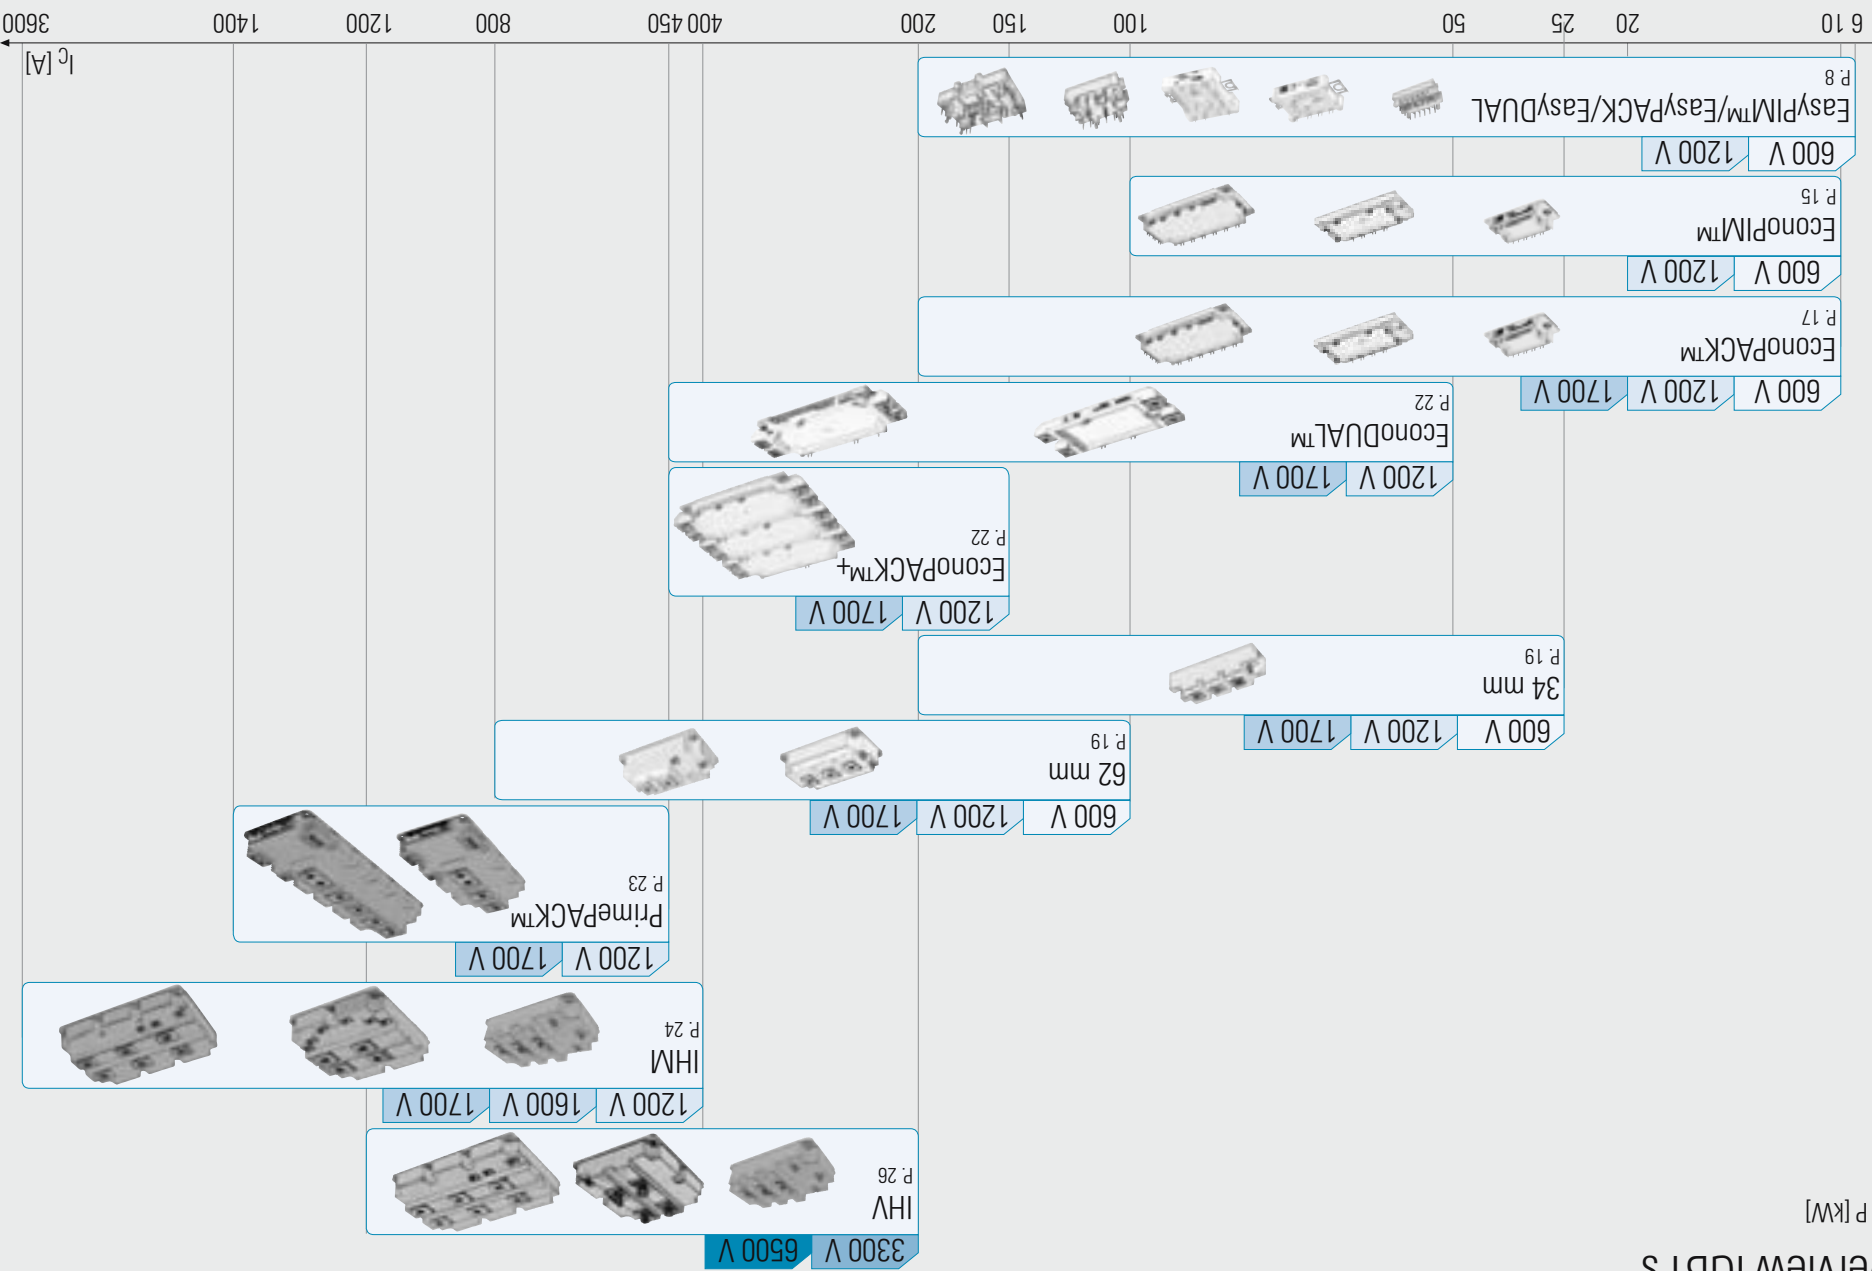

# IGBT Low Power Modules

## EasyPIM™ Power Integrated Modules

### Single Phase 600 V<sub>CES</sub>

Type	T <sub>c</sub> = 80 °C			T <sub>c</sub> = 25 °C			T <sub>vj</sub> = 25 °C			T <sub>vj</sub> = 125 °C			Rectifier Diodes	Brake Chopper	Outline / page	
	V <sub>CE</sub>	I <sub>C</sub> *	R <sub>thJC</sub>	V <sub>CEsat</sub>	R <sub>thJH</sub>	R <sub>thJC</sub>	V <sub>RRM</sub>	I <sub>d</sub>	R <sub>thJC</sub>	E <sub>on</sub> + E <sub>off</sub>	V <sub>RRM</sub>	I <sub>d</sub>				R <sub>thJC</sub>
IGBT <sup>3</sup>	600	6	1,55	4,90	3,90	0,30	800	10	2,10	800	10	2,10	800	10	2,10	L_750a/89
	600	10	1,55	4,10	3,10	0,67	800	10	2,10	800	10	2,10	800	10	2,10	L_750a/89
	600	15	1,55	3,50	2,60	1,05	800	10	2,10	800	10	2,10	800	10	2,10	L_750a/89
IGBT <sup>2</sup>	600	10	1,95	2,20	1,80	0,80	800	10	1,95	800	10	1,95	800	10	1,95	L_1a/90
	600	16	1,55	3,40	2,90	0,50	800	10	1,60	800	10	1,60	800	10	1,60	L_1a/90
	600	15	1,55	2,70	2,10	0,76	800	15	1,60	800	15	1,60	800	15	1,60	L_1a/90
	600	20	1,55	2,35	1,95	1,00	800	20	1,60	800	20	1,60	800	20	1,60	L_1a/90
IGBT <sup>2</sup>	600	10	1,95	2,20	1,80	0,80	800	10	1,60	800	10	1,60	800	10	1,60	L_2a/92
	600	15	1,95	2,40	2,00	1,00	800	15	1,00	800	15	1,00	800	15	1,00	L_2b/92
	600	19	1,95	2,40	2,00	1,00	800	15	1,00	800	15	1,00	800	15	1,00	L_2b/92
	600	25	1,95	1,80	1,60	1,29	800	20	1,00	800	20	1,00	800	20	1,00	L_2b/92
	600	10	1,55	3,40	2,90	0,50	800	10	1,60	800	10	1,60	800	10	1,60	L_2a/92
	600	15	1,55	2,70	2,10	0,70	800	15	1,20	800	15	1,20	800	15	1,20	L_2b/92
IGBT <sup>2</sup>	600	10	1,95	2,80	2,20	0,80	800	10	2,40	800	10	2,40	800	10	2,40	L_2c/92
	600	15	1,95	2,40	2,00	1,00	800	15	1,00	800	15	1,00	800	15	1,00	L_2d/93
	600	19	1,95	2,40	2,00	1,00	800	15	1,00	800	15	1,00	800	15	1,00	L_2d/93
	600	25	1,95	1,80	1,60	1,30	800	20	1,00	800	20	1,00	800	20	1,00	L_2d/93
	600	20	1,55	2,35	1,95	1,00	800	20	1,20	800	20	1,20	800	20	1,20	L_2d/93
	600	27	1,55	2,35	1,95	1,00	800	20	1,20	800	20	1,20	800	20	1,20	L_2d/93
IGBT <sup>3</sup>	600	6	1,55	4,90	3,90	0,30	800	10	2,10	800	10	2,10	800	10	2,10	L_2a/92
	600	10	1,55	4,10	3,10	0,67	800	10	2,10	800	10	2,10	800	10	2,10	L_2b/92
	600	15	1,55	3,50	2,60	1,05	800	10	2,10	800	10	2,10	800	10	2,10	L_2c/92
	600	16	1,55	4,10	3,10	0,67	800	10	2,10	800	10	2,10	800	10	2,10	L_2d/92
	600	19	1,95	2,40	2,00	1,00	800	15	1,00	800	15	1,00	800	15	1,00	L_2b/92
	600	25	1,95	1,80	1,60	1,29	800	20	1,00	800	20	1,00	800	20	1,00	L_2b/92

■ Not for new design

◆ New type

\* as specified in data sheet



Mounting Hardware see page 125.



# IGBT Low Power Modules EasyPIM™ Power Integrated Modules

## Three Phase 600 V CES

Type	$T_c = 80^\circ\text{C}$		$T_c = 25^\circ\text{C}$		$T_{vj} = 125^\circ\text{C}$		$T_{vj} = 25^\circ\text{C}$		$T_{vj} = 25^\circ\text{C}$		$T_c = 80^\circ\text{C}$		$T_c = 80^\circ\text{C}$		Outline / page
	$V_{CE}$ V	$I_C^*$ A	$R_{thJC}$ K/W	$I_d$ A	$V_{RRM}$ V	$E_{on} + E_{off}$ mJ	$R_{thJC}$ K/W	$R_{thJH}$ K/W	$V_{CESat}$ V	$I_C$ A	$I_C^*$ A	$V_{CE}$ V	$I_C^*$ A	$R_{thJC}$ K/W	
IGBT <sub>3</sub> FP10R06K14_B3	600	10	1,95	10	800	0,80	1,80	2,20	1,95	16	10	600	10	1,60	L_2f/93
	600	10	1,55	10	800	0,50	2,90	3,40	1,55	16	10	600	10	1,60	L_2f/93
IGBT <sub>3</sub> FP10R06E3_B3	600	10	1,95	10	800	0,80	1,60	2,20	1,95	15	10	600	10	2,20	L_2e/93
	600	15	2,05	15	800	1,00	1,60	2,05	1,95	20	15	600	15	1,60	L_2e/93
	600	20	2,35	20	800	1,00	1,60	2,35	1,55	27	20	600	20	1,95	L_2e/93
	600	30	2,00	30	800	1,60	1,60	2,00	1,55	37	30	600	30	1,55	L_2e/93
	600	10	1,55	10	800	0,50	2,90	3,40	1,55	16	10	600	10	2,90	L_2e/93
	600	15	2,70	15	1600	1,00	1,45	2,70	1,55	22	15	600	15	1,45	L_2e/93
	600	20	2,35	20	1600	1,00	1,45	2,35	1,55	27	20	600	20	1,95	L_2e/93
	600	30	2,00	30	1600	1,60	1,45	2,00	1,55	37	30	600	30	1,55	L_2e/93
	600	10	1,55	10	1600	0,50	2,20	2,20	1,55	16	10	600	10	2,20	L_2e/93
	600	15	2,95	15	1600	0,76	1,60	2,95	1,85	22	15	600	15	1,85	L_1a/91
	600	20	2,70	20	1600	1,00	1,60	2,70	1,55	27	20	600	20	1,60	L_1a/91
	600	30	2,25	30	1600	1,60	1,60	2,25	1,55	37	30	600	30	1,30	L_1a/91
IGBT <sub>3</sub> FP10R06E3_B4	600	10	1,55	10	800	0,50	2,90	3,40	1,55	16	10	600	10	2,90	L_2e/93
600	15	2,70	15	1600	1,00	1,45	2,70	1,55	22	15	600	15	1,45	L_2e/93	
600	20	2,35	20	1600	1,00	1,45	2,35	1,55	27	20	600	20	1,95	L_2e/93	
600	30	2,00	30	1600	1,60	1,45	2,00	1,55	37	30	600	30	1,55	L_2e/93	
600	10	1,55	10	1600	0,50	2,20	2,20	1,55	16	10	600	10	2,20	L_1a/91	
600	15	2,95	15	1600	0,76	1,60	2,95	1,85	22	15	600	15	1,85	L_1a/91	
600	20	2,70	20	1600	1,00	1,60	2,70	1,55	27	20	600	20	1,60	L_1a/91	
600	30	2,25	30	1600	1,60	1,60	2,25	1,55	37	30	600	30	1,30	L_1a/91	






\* as specified in data sheet ◆ New type

Mounting Hardware see page 125.



# IGBT Low Power Modules EasyPACK

600 V<sub>CEs</sub>

Type		V <sub>CE</sub>	I <sub>C*</sub>	I <sub>C*</sub>	I <sub>C*</sub>	V <sub>CEsat</sub>	R <sub>thjH</sub>	R <sub>thjC</sub>	Eon + Eoff	Outline / page	
		V	A	A	V	K/W	K/W	mJ			
			T <sub>C</sub> = 80 °C	T <sub>C</sub> = 25 °C	T <sub>Vj</sub> = 25 °C			T <sub>Vj</sub> = 125 °C			
IGBT <sup>3</sup>	FS10R06VE3	600	10	16	1,55	3,7	3,00	0,50	L_750b/89		
	FS15R06VE3	600	15	22	1,55	3,00	2,30	0,76	L_750b/89		
	FS20R06VE3	600	20	25	1,55	2,75	2,00	1,00	L_750b/89		
	FS30R06VE3	600	30	34	1,55	2,35	1,70	1,60	L_750b/89		
	IGBT <sup>3</sup>										
	FS10R06V14_B2	600	10	16	1,95	2,40	1,80	0,52	L_750c/89		
	FS15R06V14_B2	600	15	20	1,95	2,20	1,70	0,71	L_750c/89		
	FS10R06X14	600	10	17	1,95	2,20	1,65	0,55	L_1b/90		
	FS15R06X14	600	15	20	1,95	1,90	1,55	0,75	L_1b/90		
	FS20R06X14	600	20	26	1,95	1,65	1,40	1,10	L_1b/90		
	FS30R06X14	600	30	35	1,95	1,35	1,05	1,60	L_1b/90		
	FS50R06V14	600	50	55	1,95	0,95	0,62	1,85	L_2h/94		
IGBT <sup>3</sup>											
FS6R06VE3_B2	600	6	11	1,55	4,60	3,70	0,25	L_750c/89			
FS10R06VE3_B2	600	10	16	1,55	3,70	3,00	0,50	L_750c/89			
FS15R06VE3_B2	600	15	22	1,55	3,00	2,30	0,76	L_750c/89			
FS20R06VE3_B2	600	20	25	1,55	2,75	2,00	1,00	L_750c/89			
FS10R06XE3	600	10	16	1,55	3,40	2,90	0,50	L_1b/90			
FS15R06XE3	600	15	22	1,55	2,70	2,10	0,76	L_1b/90			
FS20R06XE3	600	20	27	1,55	2,45	1,95	1,10	L_1b/90			
FS30R06XE3	600	30	37	1,55	2,00	1,50	1,40	L_1b/90			
FS50R06VE3	600	50	60	1,45	1,35	0,95	1,95	L_2h/94			
◆ FS20R06W1E3	600	20								data on request	
◆ FS30R06W1E3	600	30								data on request	
◆ FS50R06W1E3	600	50								data on request	

■ Not for new design


◆ New type


\* as specified in data sheet

Mounting Hardware see page 125.



# IGBT Low Power Modules EasyDUAL

<b>600 V<sub>CEs</sub></b>		Type		IGBT <sup>3</sup>		FF200R06YE3			
V <sub>CE</sub>	A	I <sub>C*</sub>	A	V <sub>CEsat</sub>	A	R <sub>thjC</sub>	R <sub>thjH</sub>	R <sub>thjC</sub>	Eon + Eoff
T <sub>c</sub> = 80 °C	T <sub>c</sub> = 25 °C	T <sub>c</sub> = 25 °C	T <sub>c</sub> = 25 °C	T <sub>vj</sub> = 25 °C	T <sub>vj</sub> = 25 °C	max.	typ.	max.	T <sub>vj</sub> = 125 °C
* as specified in data sheet									
		data on request						L_2/94	

<b>1200 V<sub>CEs</sub></b>		Type		IGBT <sup>3</sup>		FF75R12YT3			
V <sub>CE</sub>	A	I <sub>C*</sub>	A	V <sub>CEsat</sub>	A	R <sub>thjC</sub>	R <sub>thjH</sub>	R <sub>thjC</sub>	Eon + Eoff
T <sub>c</sub> = 80 °C	T <sub>c</sub> = 25 °C	T <sub>c</sub> = 25 °C	T <sub>c</sub> = 25 °C	T <sub>vj</sub> = 25 °C	T <sub>vj</sub> = 25 °C	max.	typ.	max.	T <sub>vj</sub> = 125 °C
* as specified in data sheet									
		data on request						L_2/94	

\* as specified in data sheet



## IGBT Low Power Modules


### EconoPIM™ Power Integrated Modules

600 V <sub>CES</sub>												
Type	V <sub>CES</sub>	I <sub>C</sub>	R <sub>thJC</sub>	V <sub>CEsat</sub>	V <sub>RRM</sub>	I <sub>FMISM</sub>	I <sub>F</sub>	R <sub>thJC</sub>	V <sub>f</sub>	V <sub>CES</sub>	I <sub>C,IGBT</sub>	R <sub>thJC</sub>
IGBT <sup>†</sup> Standard	600	A	K/W	V	V	A	A	K/W	V	V	A	K/W
■ BSM10GP60	600	10	1,50	1,95	1,600	40	1,00	1,00	0,90	600	10,0	1,50
■ BSM15GP60	600	15	1,30	1,95	1,600	40	1,00	1,00	0,95	600	10,0	1,50
■ BSM20GP60	600	20	1,00	1,95	1,600	40	1,00	1,00	1,00	600	10,0	1,50
■ BSM30GP60	600	30	0,70	1,95	1,600	40	1,00	1,00	1,10	600	15,0	1,30
■ BSM50GP60	600	50	0,50	1,95	1,600	40	1,00	1,00	1,30	600	25,0	1,00
■ BSM75GP60	600	75	0,40	1,95	1,600	60	0,65	1,00	1,15	600	37,5	0,70
■ BSM100GP60	600	100	0,30	1,95	1,600	80	0,50	1,00	1,16	600	50,0	0,50
IGBT <sup>†</sup>												
■ FP30R06KE3	600	30	1,20	1,55	1,600	60	0,85	0,90	0,90	600	30,0	1,20
■ FP50R06KE3	600	50	0,80	1,45	1,600	70	0,85	1,05	1,05	600	30,0	1,20
■ FP50R06KE3G	600	50	0,80	1,45	1,600	80	0,65	1,00	1,00	600	50,0	0,80
■ FP75R06KE3	600	75	0,60	1,45	1,600	100	0,50	1,05	1,05	600	50,0	0,80
■ FP100R06KE3	600	100	0,45	1,45	1,600	100	0,50	1,10	1,10	600	50,0	0,80
M_E2a/95	1,50	10	1,50	1,95	1,600	40	1,00	1,00	0,90	600	10,0	1,50
M_E2a/95	1,50	15	1,30	1,95	1,600	40	1,00	1,00	0,95	600	10,0	1,50
M_E2a/95	1,50	20	1,00	1,95	1,600	40	1,00	1,00	1,00	600	10,0	1,50
M_E2a/95	1,50	30	0,70	1,95	1,600	40	1,00	1,10	1,10	600	15,0	1,30
M_E2a/95	1,50	50	0,50	1,95	1,600	40	1,00	1,30	1,30	600	25,0	1,00
M_E3a/95	1,00	50	0,50	1,95	1,600	40	1,00	1,30	1,30	600	25,0	1,00
M_E3a/95	0,70	75	0,40	1,95	1,600	60	0,65	1,15	1,15	600	37,5	0,70
M_E3a/95	0,50	100	0,30	1,95	1,600	80	0,50	1,16	1,16	600	50,0	0,50
M_E2a/95	1,20	30	1,20	1,55	1,600	60	0,85	0,90	0,90	600	30,0	1,20
M_E2a/95	1,20	50	0,80	1,45	1,600	70	0,85	1,05	1,05	600	30,0	1,20
M_E3a/95	0,80	50	0,60	1,45	1,600	80	0,65	1,00	1,00	600	50,0	0,80
M_E3a/95	0,80	75	0,60	1,45	1,600	100	0,50	1,05	1,05	600	50,0	0,80
M_E3a/95	0,80	100	0,45	1,45	1,600	100	0,50	1,10	1,10	600	50,0	0,80



## EconoPIM™ Power Integrated Modules

1200 V <sub>CES</sub>												
Type	V <sub>CES</sub>	I <sub>C</sub>	R <sub>thJC</sub>	V <sub>CEsat</sub>	V <sub>RRM</sub>	I <sub>F</sub>	R <sub>thJC</sub>	V <sub>f</sub>	V <sub>CES</sub>	I <sub>C,IGBT</sub>	R <sub>thJC</sub>	page
IGBT <sup>†</sup> Standard	1200	A	K/W	V	V	A	K/W	V	V	A	K/W	Outline /
■ BSM10GP120	1200	10	1,20	2,40	1600	40	1,00	0,90	1200	10,00	1,20	M_E2a/95
■ BSM15GP120	1200	15	0,70	2,20	1600	40	1,00	0,95	1200	10,00	1,20	M_E2a/95
■ BSM25GP120	1200	25	0,55	2,10	1600	40	1,00	1,05	1200	12,50	1,20	M_E2a/95
■ BSM35GP120	1200	35	0,55	2,40	1600	40	1,00	1,15	1200	17,50	0,70	M_E2a/95
■ BSM50GP120	1200	50	0,35	2,20	1600	40	0,65	1,05	1200	25,00	0,55	M_E3a/95
IGBT <sup>†</sup> Standard												
■ BSM10GP120G	1200	10	1,20	2,40	1600	40	1,00	0,90	1200	10,00	1,20	M_E2a/95
■ BSM15GP120G	1200	15	0,70	2,20	1600	40	1,00	0,95	1200	10,00	1,20	M_E2a/95
■ BSM25GP120G	1200	25	0,55	2,10	1600	40	1,00	1,05	1200	12,50	1,20	M_E2a/95
■ BSM35GP120G	1200	35	0,55	2,40	1600	40	1,00	1,15	1200	17,50	0,70	M_E3a/95
■ BSM50GP120G	1200	50	0,35	2,20	1600	40	0,65	1,05	1200	25,00	0,55	M_E3a/95
IGBT <sup>†</sup> Standard												



■ Not for new design







# IGBT Low Power Modules EconoPACK™

## 600 V – Type

Type	V <sub>CEs</sub> V	I <sub>c</sub> A	V <sub>CEsat</sub> V	P <sub>tot</sub> W	R <sub>thJC</sub> K/M	Outline / page
IGBT <sup>+</sup> Standard	600	20	1.95	1.25	1.00	M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
IGBT <sup>+</sup>	600	50	1.95	2.50	0.90	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
SixPACK	600	100	1.95	4.30	0.29	M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
SixPACK	600	150	1.95	5.70	0.22	M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
						M_E3c/96
						M_E3b/96
SixPACK	600	200	1.95	7.00	0.18	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
M_E3a/96						

■ Not for new design



## 1200 V – Type

Type	V <sub>CEs</sub> V	I <sub>c</sub> A	V <sub>CEsat</sub> V	P <sub>tot</sub> W	R <sub>thJC</sub> K/M	Outline / page
IGBT <sup>+</sup> Standard	1200	10	2.70	1.52	0.80	M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
						M_E2d/96
						M_E2c/96
IGBT <sup>+</sup> Low Loss	1200	15	2.10	1.45	0.86	M_E2c/96
						M_E2b/95
						M_E2c/96
						M_E2b/95
						M_E2c/96
						M_E2b/95
						M_E2c/96
						M_E2b/95
						M_E2c/96
						M_E2b/95
						M_E2c/96
						M_E2b/95
SixPACK	1200	25	1.70	1.45	0.86	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	35	1.70	2.00	0.6	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	50	1.70	2.70	0.45	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	75	1.70	3.50	0.35	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	100	1.70	4.80	0.26	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	150	1.70	7.00	0.18	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	200	1.70	12.00	0.12	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	250	1.70	17.00	0.08	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	350	1.70	25.00	0.06	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	480	1.70	35.00	0.04	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	700	1.70	70.00	0.02	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	1000	1.70	100.00	0.01	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	1500	1.70	150.00	0.005	M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
						M_E3b/95
						M_E3a/96
M_E3b/95						
SixPACK	1200	2000	1.70	200.00	0.003	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	2500	1.70	250.00	0.002	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	3500	1.70	350.00	0.001	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	4800	1.70	480.00	0.0005	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	7000	1.70	700.00	0.0002	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	10000	1.70	1000.00	0.0001	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	15000	1.70	1500.00	0.00005	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	20000	1.70	2000.00	0.00003	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	25000	1.70	2500.00	0.00002	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	35000	1.70	3500.00	0.00001	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	48000	1.70	4800.00	0.000005	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	70000	1.70	7000.00	0.000002	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	100000	1.70	10000.00	0.000001	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	150000	1.70	15000.00	0.0000005	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	200000	1.70	20000.00	0.0000003	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
M_E2b/95						
SixPACK	1200	250000	1.70	25000.00	0.0000002	M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/96
						M_E2b/95
						M_E2a/9

# IGBT Low Power Modules EconoPACK™

## IGBT


1200 V – Type									
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$V_{CEsat}$	$P_{tot}$	$R_{thJC}$	$R_{thJC}$	Outline / page	
SixPACK	FS75R12KS4	1200	75	3.20	500	0.25	M_E3c/96	IGBT <sup>2</sup> Fast	
	FS100R12KS4	1200	100	3.20	660	0.19	M_E3c/96		
SixPACK	FS25R12NT3	1200	25	1.70	35	0.86	M_E1b/95	IGBT <sup>2</sup> Fast	
	FS35R12KT3	1200	35	1.70	210	0.60	M_E2b/95		
	FS50R12KT3	1200	50	1.70	280	0.45	M_E2b/95		
	FS75R12KT3	1200	75	1.70	355	0.35	M_E2b/95		
	FS75R12KT3G	1200	75	1.70	355	0.35	M_E2b/95		
	FS100R12KT3	1200	100	1.70	480	0.26	M_E3b/95		
	FS150R12KT3	1200	150	1.70	700	0.18	M_E3b/95		
	FS100R12KT4	1200	100	1.70	355	0.35	M_E3g/97		IGBT <sup>2</sup> Fast
	FS150R12KT4	1200	150	1.70	480	0.26	M_E3g/97		
	IGBT <sup>2</sup> Fast PressFIT								
	◆ FS100R12KT4_B11	1200	100	1.70	355	0.35	M_E3g/97		
	◆ FS100R12KT4_B11	1200	100	1.70	355	0.35	M_E3g/97		
◆ FS150R12KT4_B11	1200	150	1.70	480	0.26	M_E3g/97			
SixPACK with Shunt	FS75R12KE3_B3	1200	75	1.70	355	0.35	M_E3g/97	IGBT <sup>2</sup>	
	FS100R12KE3_B3	1200	100	1.70	480	0.26	M_E3g/97		
	FT150R12KE3G_B4	1200	150	1.70	700	0.18	M_E3h/97		
	FT150R12KE3_B5	1200	150	1.70	700	0.18	M_E2f/97		
TriPACK High with Shunts	FT150R12KE3G_B4	1200	150	1.70	700	0.18	M_E3h/97	IGBT <sup>2</sup>	
	FT150R12KE3_B5	1200	150	1.70	700	0.18	M_E2f/97		

1200 V – Type									
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$V_{CEsat}$	$P_{tot}$	$R_{thJC}$	$R_{thJC}$	Outline / page	
FourPACK	F4-25R12NS4	1200	25	3.20	210	0.60	M_E1c/96	IGBT <sup>2</sup> Fast	
	F4-35R12NS4	1200	35	3.40	250	0.50	M_E1c/96		
	F4-50R12KS4	1200	50	3.20	355	0.35	M_E2e/96		
	F4-75R12KS4	1200	75	3.20	500	0.25	M_E2e/96		
FourPACK	F4-100R12KS4	1200	100	3.20	660	0.19	M_E3d/96	IGBT <sup>2</sup> Fast	
	F4-150R12KS4	1200	150	3.20	960	0.13	M_E3d/96		
	FS25R12NS4	1200	25	3.20	210	0.60	M_E1c/96		
	FS35R12NS4	1200	35	3.40	250	0.50	M_E1c/96		
3-phase-Full-Bridges	FS100R17KE3	1700	100	2.00	555	0.225	M_E3b/95	IGBT <sup>2</sup>	
	FS50R17KE3_B17	1700	50	2.00	345	0.36	M_E2g/97		
	FS75R17KE3	1700	75	2.00	465	0.27	M_E3b/95		
	FS100R17KE3	1700	100	2.00	555	0.225	M_E3b/95		
3-phase-Full-Bridges	BSM50GD170DL	1700	50	2.70	480	0.26	M_E3c/96	IGBT <sup>2</sup> Low Loss	
	IGBT <sup>2</sup> Low Loss								

◆ Not for new design  
 ■ New type


## IGBT Medium Power Modules 34 mm and 62 mm Modules

### 600 V – Type

Type	$V_{CES}$ V	$I_C$ A	$V_{CSat}$ V	$T_{vj=25^\circ C}$ per arm	$P_{tot}$ W	$R_{thJC}$ K/M	Outline / page	
Dual Modules 	BSM50GB60DLC	600	50	1,95	280	0,44	M_34a/98	
	BSM75GB60DLC	600	75	1,95	355	0,35	M_34a/98	
	BSM100GB60DLC	600	100	1,95	445	0,28	M_34a/98	
	BSM150GB60DLC	600	150	1,95	595	0,21	M_34a/98	
	BSM200GB60DLC	600	200	1,95	730	0,17	M_34a/98	
	BSM300GB60DLC	600	300	1,95	1250	0,10	M_62a/98	
	IGBT <sup>3</sup> Low Loss							
	FF200R06KE3	600	200	1,45	680	0,22	M_62a/98	
	FF300R06KE3	600	300	1,45	940	0,16	M_62a/98	
	FF400R06KE3	600	400	1,45	1250	0,12	M_62a/98	

## 34 mm and 62 mm Modules




### 1200 V – Type


Type	$V_{CES}$ V	$I_C$ A	$V_{CSat}$ V	$T_{vj=25^\circ C}$ typ.	$P_{tot}$ W	$R_{thJC}$ K/M	Outline / page	
Dual Modules 	BSM25GB120DN2	1200	25	2,50	200	0,6	M_34a/98	
	BSM35GB120DN2	1200	35	2,70	280	0,44	M_34a/98	
	BSM50GB120DN2	1200	50	2,50	400	0,3	M_34a/98	
	BSM75GB120DN2	1200	75	2,50	625	0,2	M_34a/98	
	BSM100GB120DN2K	1200	100	2,50	700	0,18	M_34a/98	
	BSM150GB120DN2	1200	100	2,50	800	0,16	M_62a/98	
	BSM200GB120DN2	1200	150	2,50	1250	0,1	M_62a/98	
	BSM50GB120DLC	1200	50	2,10	460	0,27	M_34a/98	
	BSM75GB120DLC	1200	75	2,10	690	0,18	M_34a/98	
	BSM100GB120DLC	1200	100	2,10	830	0,15	M_34a/98	
	BSM150GB120DLC	1200	150	2,10	780	0,16	M_62a/98	
	BSM200GB120DLC	1200	200	2,10	1300	0,08	M_62a/98	
	BSM300GB120DLC	1200	300	2,10	2500	0,05	M_62a/98	
	IGBT <sup>3</sup> Standard							
	BSM150R12KE3G	1200	150	1,70	780	0,16	M_62a/98	
	FF200R12KE3	1200	200	1,70	1040	0,12	M_62a/98	
	FF300R12KE3	1200	300	1,70	1450	0,085	M_62a/98	
	FF400R12KE3	1200	400	1,70	2000	0,062	M_62a/98	
	IGBT <sup>3</sup> Fast							
	FF150R12KT3G	1200	150	1,70	780	0,16	M_62a/98	
FF200R12KT3	1200	200	1,70	1050	0,12	M_62a/98		
FF300R12KT3	1200	300	1,70	1450	0,085	M_62a/98		
FF400R12KT3	1200	400	1,70	2000	0,062	M_62a/98		







## IGBT Medium Power Modules EconoPACK™2 & EconoDUAL™3

1200 V <sub>CES</sub>													
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page							
IGBT <sup>3</sup>	FF150R12ME3G	150	1,70	11/24	0,18	M_ED3/99		data on request	M_ED3/99				
		225	1,70	15/36	0,11	M_ED3/99							
		300	1,70	22/43	0,085	M_ED3/99							
		450	1,70	33/65	0,06	M_ED3/99							
		1200	1200										
		1200	1200										
	IGBT <sup>2</sup> Fast	FF150R12MS4G	1200	1200									
		FF225R12MS4	1200	1200					M_ED3/99				
		FF300R12MS4	1200	1200					M_ED3/99				
		FF100R12MT4	1200	100					M_ED2a/100				
		FF150R12MT4	1200	150					M_ED2a/100				
		FF200R12MT4	1200	200					M_ED2a/100				
Dual Modules	FF150R12ME3G	150	1,70	11/24	0,18	M_ED3/99		data on request	M_ED3/99				
		225	1,70	15/36	0,11	M_ED3/99							
		300	1,70	22/43	0,085	M_ED3/99							
		450	1,70	33/65	0,06	M_ED3/99							
		1200	1200										
		1200	1200										
	IGBT <sup>2</sup> Fast	F4-50R12MS4	1200	50					M_ED2b/100				
		F4-75R12MS4	1200	75					M_ED2b/100				
		FourPACK											
													

1700 V <sub>CES</sub>													
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page							
IGBT <sup>3</sup>	FF150R17ME3G	150	1,70			M_ED3/99		data on request	M_ED3/99				
		225	1,70			M_ED3/99							
		300	1,70			M_ED3/99							
		450	1,70			M_ED3/99							
		1700	1700										
		1700	1700										
	Dual Modules	FF450R17ME3	1700	450					M_ED3/99				
		FF300R17ME3	1700	300					M_ED3/99				
		FF225R17ME3	1700	225					M_ED3/99				
		FF150R17ME3	1700	150					M_ED3/99				


## IGBT Medium Power Modules EconoPACK™+


1200 V <sub>CES</sub>													
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page							
IGBT <sup>3</sup>	FS150R12KE3G	150	1,70	11/24	0,18	M_E+a/99		data on request	M_E+a/99				
		225	1,70	15/36	0,11	M_E+a/99							
		300	1,70	22/43	0,085	M_E+a/99							
		450	1,70	33/65	0,06	M_E+a/99							
		1200	1200										
		1200	1200										
	SixPACK	FS150R12KE3	1200	150									
		FS225R12KE3	1200	225									
		FS300R12KE3	1200	300									
		FS450R12KE3	1200	450									

1700 V <sub>CES</sub>													
Type	$V_{CES}$	$I_C$	$V_{CEsat}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page							
IGBT <sup>3</sup>	FS150R17KE3G	150	2,00	48/47	0,12	M_E+a/99		data on request	M_E+a/99				
		225	2,00	71,5/70,5	0,09	M_E+a/99							
		300	2,00	95/94	0,075	M_E+a/99							
		450	2,00	140/140	0,055	M_E+a/99							
		1700	1700										
		1700	1700										
	SixPACK	FS150R17KE3	1700	150									
		FS225R17KE3	1700	225									
		FS300R17KE3	1700	300									
		FS450R17KE3	1700	450									

◆ New type

# IGBT High Power Modules PrimePACK™

1200 V <sub>CES</sub>		Type <sup>1)</sup>	V <sub>CES</sub> V	I <sub>C</sub> A	V <sub>CESat</sub> V	E <sub>on</sub> /E <sub>off</sub> mWs	R <sub>thJC</sub> K/M	Outline / page						
 Half Bridge									IGBT <sup>2)</sup>	FF450R12IE4	1200	450	data on request	H_PP2/101
										FF600R12IE4	1200	600	data on request	H_PP2/101
										FF900R12IP4	1200	900	data on request	H_PP2/101
										FF1400R12IP4	1200	1400	data on request	H_PP3/101

1700 V <sub>CES</sub>		Type <sup>1)</sup>	V <sub>CES</sub> V	I <sub>C</sub> A	V <sub>CESat</sub> V	E <sub>on</sub> /E <sub>off</sub> mWs	R <sub>thJC</sub> K/M	Outline / page								
 Half Bridge									IGBT <sup>2)</sup>	FF450R17IE4	1700	450	2,0	180/120	0,054	H_PP2/101
										FF650R17IE4	1700	650	2,0	300/205	0,036	H_PP2/101
										FF1000R17IE4	1700	1000	2,0	390/295	0,024	H_PP3/101

<sup>1)</sup> valid for all PrimePACK™ part-no: T<sub>vj</sub> = 150°C, I<sub>GRM</sub> = 2xI<sub>C</sub>

# IGBT High Power Modules IHM

1200 V <sub>CES</sub>																					
Type *)	V <sub>CES</sub>	I <sub>C</sub>	V <sub>CEsat</sub>	E <sub>on</sub> /E <sub>off</sub>	R <sub>thJC</sub>	Outline / page	Single modules			Dual Modules											
IGBT <sup>3</sup> Standard	1200	400	2,70	70/60	0,046	H_IH2/101	FF40R12KF4	1200	400	2,70	70/60	0,032	H_IH2/101	FF40R12KF4	1200	400	2,70	70/60	0,032	H_IH2/101	
	1200	600	2,70	90/90	0,032	H_IH2/101	FF60R12KF4	1200	600	2,70	90/90	0,025	H_IH2/101	FF60R12KL4C	1200	600	2,70	90/90	0,025	H_IH2/101	
	1200	800	2,70	130/120	0,025	H_IH2/101	FF80R12KF4	1200	800	2,70	130/120	0,025	H_IH2/101	FF80R12KL4C	1200	800	2,70	130/120	0,025	H_IH2/101	
	1200	400	2,10	72/58	0,044	H_IH2/101	FF40R12KL4C	1200	400	2,10	72/58	0,044	H_IH2/101	FF40R12KL4C	1200	400	2,10	72/58	0,044	H_IH2/101	
	1200	600	2,10	100/90	0,032	H_IH2/101	FF60R12KL4C	1200	600	2,10	100/90	0,032	H_IH2/101	FF60R12KL4C	1200	600	2,10	100/90	0,032	H_IH2/101	
	1200	800	2,10	120/130	0,025	H_IH2/101	FF80R12KL4C	1200	800	2,10	120/130	0,025	H_IH2/101	FF80R12KL4C	1200	800	2,10	120/130	0,025	H_IH2/101	
	1200	600	1,70	120/95	0,044	H_IH2/101	FF60R12KE3	1200	600	1,70	120/95	0,044	H_IH2/101	FF60R12KE3	1200	600	1,70	120/95	0,044	H_IH2/101	
	1200	800	1,70	160/125	0,032	H_IH2/101	FF80R12KE3	1200	800	1,70	160/125	0,032	H_IH2/101	FF80R12KE3	1200	800	1,70	160/125	0,032	H_IH2/101	
	1200	1200	1,70	245/190	0,025	H_IH2/101	FF1200R12KE3	1200	1200	1,70	245/190	0,025	H_IH2/101	FF1200R12KE3	1200	1200	1,70	245/190	0,025	H_IH2/101	
	IGBT <sup>3</sup> Low Loss	1200	400	2,10	72/58	0,044	H_IH2/101	FF40R12KL4C	1200	400	2,10	72/58	0,044	H_IH2/101	FF40R12KL4C	1200	400	2,10	72/58	0,044	H_IH2/101
	IGBT <sup>3</sup> Low Loss	1200	600	2,10	100/90	0,032	H_IH2/101	FF60R12KL4C	1200	600	2,10	100/90	0,032	H_IH2/101	FF60R12KL4C	1200	600	2,10	100/90	0,032	H_IH2/101
	IGBT <sup>3</sup> Standard	1200	800	2,70	130/120	0,023	H_IH1/101	FZ80R12KF4	1200	800	2,70	130/120	0,023	H_IH1/101	FZ80R12KF4	1200	800	2,70	130/120	0,023	H_IH1/101
IGBT <sup>3</sup> Fast	1200	800	3,20	76/58	0,017	H_IH1/102	FZ80R12KS4_B2	1200	800	3,20	76/58	0,017	H_IH1/102	FZ80R12KS4_B2	1200	800	3,20	76/58	0,017	H_IH1/102	
IGBT <sup>3</sup> Standard	1200	1050	2,70	150/170	0,018	H_IH1/101	FZ1050R12KF4	1200	1050	2,70	150/170	0,018	H_IH1/101	FZ1050R12KF4	1200	1050	2,70	150/170	0,018	H_IH1/101	
IGBT <sup>3</sup> Low Loss	1200	800	2,70	170/190	0,016	H_IH1/101	FZ1200R12KF4	1200	800	2,70	170/190	0,016	H_IH1/101	FZ1200R12KL4C	1200	800	2,70	170/190	0,016	H_IH1/101	
IGBT <sup>3</sup> Low Loss	1200	1200	2,70	220/290	0,0125	H_IH1/101	FZ1600R12KF4	1200	1200	2,70	220/290	0,0125	H_IH1/101	FZ1600R12KL4C	1200	1200	2,70	220/290	0,0125	H_IH1/101	
IGBT <sup>3</sup> Low Loss	1200	1800	2,70	250/330	0,011	H_IH7/103	FZ1800R12KF4	1200	1800	2,70	250/330	0,011	H_IH7/103	FZ1800R12KL4C	1200	1800	2,70	250/330	0,011	H_IH7/103	
IGBT <sup>3</sup> Low Loss	1200	2400	2,70	310/410	0,0084	H_IH7/103	FZ2400R12KF4	1200	2400	2,70	310/410	0,0084	H_IH7/103	FZ2400R12KL4C	1200	2400	2,70	310/410	0,0084	H_IH7/103	
IGBT <sup>3</sup>	1200	1200	1,70	245/190	0,022	H_IH4/102	FZ1200R12KE3	1200	1200	1,70	245/190	0,022	H_IH4/102	FZ1200R12KL4C	1200	1200	1,70	245/190	0,022	H_IH4/102	
IGBT <sup>3</sup>	1200	1600	1,70	325/250	0,016	H_IH4/102	FZ1600R12KE3	1200	1600	1,70	325/250	0,016	H_IH4/102	FZ1600R12KL4C	1200	1600	1,70	325/250	0,016	H_IH4/102	
IGBT <sup>3</sup>	1200	2400	1,70	490/380	0,0125	H_IH4/102	FZ2400R12KE3	1200	2400	1,70	490/380	0,0125	H_IH4/102	FZ2400R12KL4C	1200	2400	1,70	490/380	0,0125	H_IH4/102	
IGBT <sup>3</sup>	1200	3600	1,70	735/570	0,008	H_IH7/103	FZ3600R12KE3	1200	3600	1,70	735/570	0,008	H_IH7/103	FZ3600R12KL4C	1200	3600	1,70	735/570	0,008	H_IH7/103	

◆ New type  
All modules are UL recognized

1200 V <sub>CES</sub>													
Type *)	V <sub>CES</sub>	I <sub>C</sub>	V <sub>CEsat</sub>	E <sub>on</sub> /E <sub>off</sub>	R <sub>thJC</sub>	Outline / Page	Single modules			SixPACK Modules	Chopper Modules	FourPACK Modules	
IGBT <sup>3</sup> IHM-B Housing	1200	1200	2,70	70/60	0,046	H_IH4B/102	◆ FZ1200R12HP4	1200	1200	2,70	70/60	0,064	H_IH8/103
	1200	1600	2,70	90/90	0,032	H_IH4B/102	◆ FZ1600R12HP4	1200	1600	2,70	90/90	0,048	H_IH8/103
	1200	2400	2,70	130/120	0,025	H_IH4B/102	◆ FZ2400R12HP4	1200	2400	2,70	130/120	0,064	H_IH8/103
	1200	2400	2,70	130/120	0,025	H_IH7B	◆ FZ2400R12HP4_B9	1200	2400	2,70	130/120	0,064	H_IH8/103
IGBT <sup>3</sup> IHM-B Housing	1200	1200	2,70	70/60	0,046	H_IH4B/102	◆ FZ1200R12HP4	1200	1200	2,70	70/60	0,064	H_IH8/103
	1200	1600	2,70	90/90	0,032	H_IH4B/102	◆ FZ1600R12HP4	1200	1600	2,70	90/90	0,048	H_IH8/103
	1200	2400	2,70	130/120	0,025	H_IH4B/102	◆ FZ2400R12HP4	1200	2400	2,70	130/120	0,064	H_IH8/103
	1200	2400	2,70	130/120	0,025	H_IH7B	◆ FZ2400R12HP4_B9	1200	2400	2,70	130/120	0,064	H_IH8/103
IGBT <sup>3</sup> Standard	1200	300	2,70	80/45	0,064	H_IH8/103	FS300R12KF4	1200	300	2,70	80/45	0,048	H_IH8/103
	1200	400	2,70	100/55	0,048	H_IH8/103	FS400R12KF4	1200	400	2,70	100/55	0,064	H_IH8/103
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	300	2,70	80/45	0,064	H_IH8/103	FS300R12KF4	1200	300	2,70	80/45	0,048	H_IH8/103
	1200	400	2,70	100/55	0,048	H_IH8/103	FS400R12KF4	1200	400	2,70	100/55	0,064	H_IH8/103
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
	1200	1200	2,70	245/190	0,025	H_IH2/101	IGBT <sup>3</sup> Standard	1200	1200	2,70	245/190	0,025	H_IH2/101
IGBT <sup>3</sup> Standard													





IGBT High Power Modules IHM

Type *)		$V_{CES}$	$I_C$	$V_{CEsat}$	$V_{Tvj=25^\circ C}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page
1700 V <sub>CES</sub>								
FD...K	IGBT <sup>2</sup> Low Loss	1700	400	2,60	190/150	0,04	H_IH9/103	
		1700	600	2,60	270/220	0,026	H_IH2/101	
		1700	800	2,60	290/335	0,02	H_IH2/101	
		1700	1600	2,60	430/670	0,01	H_IH7/103	
		1700	1700	2,60	185/220	0,029	H_IH2/101	
	IGBT <sup>2</sup>	1700	600	2,00	185/220	0,029	H_IH2/101	
		1700	800	2,00	240/295	0,024	H_IH2/101	
		1700	1700	2,00	350/445	0,019	H_IH4/102	
		1700	1700	2,00	240/295	0,024	H_IH2/101	
		1700	1700	2,00	350/445	0,019	H_IH4/102	

IGBT High Power Modules IHV

Type *)		$V_{CES}$	$I_C$	$V_{CEsat}$	$V_{Tvj=25^\circ C}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page
3300 V <sub>CES</sub>								
Dual Modules								
		3300	200	3,40	480/255	0,057	H_IH9/103	
		3300	400	3,40	960/510	0,026	H_IH6/102	
		IGBT <sup>2</sup> Standard						

◆ New type  
 ...B2: Traction Module (AISIC)  
 \*) valid for all part-no:  $T_{vj} = 125^\circ C, I_{CHM} = 2xI_C$

3300 V<sub>CES</sub>

Type *)		$V_{CES}$	$I_C$	$V_{CEsat}$	$V_{Tvj=25^\circ C}$	$E_{on}/E_{off}$	$R_{thJC}$	Outline / page
3300 V <sub>CES</sub>								
IH4	IGBT <sup>2</sup> Standard	3300	800	3,40	1920/1020	0,013	H_IH4/102	
		3300	1200	3,40	2880/1530	0,0085	H_IH7/103	
		3300	800	3,00	2250/1250	0,013	H_IH4/102	
		3300	1200	3,00	3150/1900	0,085	H_IH7/103	
		3300	400	3,00	1200/600	0,026	H_IH10/104	
	High Insulation	3300	800	3,00	2250/1250	0,013	H_IH11/104	
		3300	1200	3,00	3150/1900	0,0085	H_IH12/104	
		3300	400	3,00	1200/600	0,026	H_IH10/104	
		3300	800	3,00	2250/1250	0,013	H_IH11/104	
		3300	1200	3,00	3150/1900	0,0085	H_IH12/104	
FD...K	IGBT <sup>2</sup> Standard	3300	400	3,40	730/510	0,026	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH7/103	
		3300	400	3,40	730/510	0,026	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH7/103	
		3300	400	3,40	730/510	0,026	H_IH4/102	
	High Insulation	3300	800	3,40	1450/1000	0,013	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH4/102	
		3300	800	3,40	1450/1000	0,013	H_IH4/102	
Single Modules	IGBT <sup>2</sup>	3300	1000	3300	3300	1000	on request	H_IH4B/102
		3300	1500	3300	3300	1500	on request	H_IH7B/103
		3300	1000	3300	3300	1000	on request	H_IH4B/102
		3300	1500	3300	3300	1500	on request	H_IH7B/103
		3300	1000	3300	3300	1000	on request	H_IH4B/102
	IGBT <sup>2</sup>	3300	1500	3300	3300	1500	on request	H_IH7B/103
		3300	1000	3300	3300	1000	on request	H_IH4B/102
		3300	1500	3300	3300	1500	on request	H_IH7B/103
		3300	1000	3300	3300	1000	on request	H_IH4B/102
		3300	1500	3300	3300	1500	on request	H_IH7B/103

$T_{vj} = 150^\circ C$

## IGBT High Power Modules IHV

6500 V<sub>CES</sub>

Type *)		V <sub>CES</sub>	I <sub>C</sub>	V <sub>CESat</sub>	E <sub>on</sub> /E <sub>off</sub>	R <sub>thJC</sub>	Outline /
Type *)		V	A	V	mWs	K/W	page
Type *)		V	A	V	mWs	K/W	page
IGBT <sup>1</sup> Standard	FZ200R65K1	6500	200	4,30	1900/1200	0,033	H_IH10/102
	FZ400R65K1	6500	400	4,30	4000/2300	0,017	H_IH11/102
IGBT <sup>1</sup> Standard	FZ600R65K1	6500	600	4,30	5900/3500	0,011	H_IH12/102
	IGBT <sup>1</sup> Standard						
Single Modules	FZ200R65K1-K	6500	200	4,30	1900/1200	0,033	H_IH11/102
	FD400R65K1-K	6500	400	4,30	4000/2300	0,017	H_IH12/102
Chopper Modules							




## High Power Diode Modules

Diode Modules

Type *)		V <sub>RHM</sub>	I <sub>F</sub>	Q <sub>t</sub>	R <sub>thJC</sub>	Outline /
Type *)		V	A	µAs	K/W	page
Type *)		V	A	µAs	K/W	page
Standard	DD400S16K4	1600	400	40	0,10	H_IH1/101
	DD600S16K4	1600	600	60	0,08	H_IH1/101
Standard	DD400S17K6C_B2	1700	400	145	0,016	H_IH1/101
	DD800S17K6C_B2	1700	800	265	0,034	H_IH1/101
Standard	DZ400S17K6C_B2	1700	2400	750	0,012	H_IH7/103
	DD600S17K3_B2	1700	600	260	0,051	H_IH4/102
Standard	DD800S17K3_B2	1700	800	345	0,043	H_IH4/102
	DZ3600S17K3_B2	1700	3600	1450	0,014	H_IH7/103
Standard	DD200S33K2C	3300	200	220	0,108	H_IH9/102
	DD400S33K2C	3300	400	440	0,051	H_IH4/102
Standard	DD800S33K2C	3300	800	900	0,025	H_IH4/102
	DD1200S33K2C	3300	1200	1300	0,017	H_IH4/102
Low Loss	DD400S33K12C	3300	400	480	0,054	H_IH9/103
	DD1200S33K12C_B5	3300	1200	1450	0,017	H_IH11/104
Standard	DD200S65K1	6500	200	350	0,063	H_IH11/104
	DD400S65K1	6500	400	700	0,032	H_IH11/104
Standard	DD600S65K1	6500	600	1050	0,021	H_IH11/104

...\_B5: 6,5kV housing / 10,2kV insulation

\*) valid for all part-no: T<sub>vj</sub> = 125°C, I<sub>RHM</sub> = 2xI<sub>C</sub>

Outline / page	Solder Temperature *	Typ. Deadtime HS - LS	Output A	Driver Supply Voltage V	Input Logic Level CMOS (5 V)	IGBT max V <sub>CE</sub> V	Channels	Isolation Technology	Type	Image
PG-DSO-16/124	260°C MSL3	n.a.	+2/-2	0/+15 or -8/+15	CMOS (5 V)	1200 V	1	Coreless Transformer	1ED02012-S	
PG-DSO-18/123	260°C MSL3	No	+1/-2	0/+18	TTL/CMOS (5 V)	1200 V	2	Coreless Transformer	2ED02012-FI	
PG-DSO-28/124	260°C MSL3	325 ns	typ. +0,15/-0,44	0/+17,5	TTL/CMOS (5 V)	600 V	6	Thin-film SOI	6ED003L06-F	


Datasheets available under [www.infineon.com/gatedriver](http://www.infineon.com/gatedriver)

\* according to JEDEC-standard J-STD-020C

- Technical Features 1ED02012-S**
- Single Channel isolated IGBT Driver
  - For 600 V / 1200 V IGBTs
  - 2 A rail-to-rail output
  - V<sub>CEsat</sub> detection
  - Two-level-turn-off
  - Active Miller Clamp
  - RoHS-compliant

- Technical Features 2ED02012-FI**
- Matched propagation delay for both channels
  - Floating channel designed for direct supply and boot-strap operation
  - Tolerant to negative transient voltage
  - Undervoltage lockout for both channels
  - 3.3 V and 5 V TTL compatible inputs
  - CMOS Schmitt-triggered inputs with pull-down
  - Non-inverting inputs
  - Interlocking inputs
  - Dedicated shutdown input with pull-up
  - RoHS-compliant

- Technical Features 6ED003L06-F**
- Insensitivity of the bridge output to negative transient voltages down to -50V as a result of SOI technology
  - Power supply of the high-side drivers via bootstrap
  - CMOS- and LSTTL-compatible input (inverted logic)
  - Signal interlocking of every phase to prevent cross-conduction
  - Overcurrent protection
  - Undervoltage lockout
  - "Shutdown" of all switches during error conditions
  - Programmable restart after overcurrent detection
  - RoHS-compliant



Type	Channels	Control Interface	IGBT max. V <sub>CE</sub>	V <sub>ISO</sub>	I <sub>GM</sub>	P <sub>OUT</sub>	size mm.-mm	mounting by	for modules	Outline / page
ZED300C17-S	2	E	1700	*	±30	7	60,5 - 72	soldering	EconoPACK™+, 62 mm, IHM	123
ZED300C17-ST	2	E	1700	*	±30	7	60,5 - 72	soldering	EconoPACK™+, 62 mm, IHM	123

\* Datasheets available under [www.infineon.com/powersemiconductors](http://www.infineon.com/powersemiconductors)

- Technical features ZED300C17-S / ZED300C17-ST**
- Failure output
  - Half-bridge – or direct mode can be adjusted
  - Interlocking against each other and dead time generation in half-bridge mode
  - Low-resistance and therefore noise-immune 15 V PWM signal input
  - +15 V signal processing (15 V logic)
  - Minimum pulse suppression 400 ns

- Reset input and PWM reset
- Dynamic over-current detection (DOCD) by monitoring the saturation voltage
- “Soft shut down” in case of failure shutdown
- External detected failure analysis (EDFA)
- ± 15V logic (high noise immunity)
- Additional ± 16 V supply outputs






# IGBT Low Power Modules EasyBRIDGE

800 V

Type	$V_{RHM}$ V	$I_d$ A	$R_{thJC}$ K/W max.	$V_{f0}$ V $T_{vj} = 150^\circ\text{C}$	$r_t$ m $\Omega$	$V_{CE}$ V	$I_c^*$ A $T_C = 80^\circ\text{C}$	$R_{thJC}$ K/W max.	Outline / page
single phase DDBZU30N08VR	800	48	1,30	0,75	6,95	600	20	1,50	L_750d/105
three phase DDBU30N08VR	800	30	1,80	0,85	8,30	600	20	1,50	L_750e/105
three phase DDBU50N08XR	800	50	1,20	0,75	6,95	600	30	1,05	L_1c/105

\* as specified in data sheet



# IGBT Low Power Modules EasyBRIDGE

1600 V

Type	$V_{RHM}$ V	$I_D$ A	$R_{thJC}$ K/W max.	$V_{D0}$ V $T_{vj} = 150^\circ\text{C}$	$r_t$ m $\Omega$	$V_{CE}$ V	$I_C^*$ A $T_C = 80^\circ\text{C}$	$R_{thJC}$ K/W max.	Outline / page
three phase DDBU25N16VR	1600	30	1,55	0,76	7,60	1200	15	1,45	L_750e/105
three phase DDBU75N16VR	1600	65	0,90	0,83	3,90	1200	50	0,55	L_2i/105
three phase DDBU40N16XR	1600	50	0,90	0,80	4,35	1200	25	0,90	L_1c/105

\* as specified in data sheet

IGBT

SCR/Diode Modules

Presspacks

Stacks

Outlines

Accessories

Explanations



# Econobridge™ Rectifier

Econobridge™ Rectifiers are UL recognized

Type	$V_{DRM}$ , $V_{RSM}$ $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{DRM} + 100V$	$I_{RMSM}$ (A) $I_{TSM}$ (A) 10 ms, $T_{vj\ max}$	$I_{Tc}$ (A/C)	$V_{(TO)}$ (V) $T_{vj} = T_{vj\ max}$	$r_T$ (m $\Omega$ ) $T_{vj} = T_{vj\ max}$	$R_{thjc}$ (°C/W) per arm 120° el. Square wave	$T_{vj\ max}$ (°C)	Brake IGBT $V_{CES}$ (V) $I_{lc}$ (A)	Outline / page				
3 phase bridge rectifier, uncontrolled	DD B6U 100 N 16 R	1600	60	1000	550	100/100	0,75	3,10	1,15	150	M_E2g/106		
3 phase bridge rectifier, uncontrolled with brake chopper	DD B6U 84 N 16 RR	1600	60	550	85/100	100/100	0,75	5,50	1,45	150	1200	M_E2h/106	50
3 phase bridge rectifier, uncontrolled with brake chopper and NTC	DD B6U 104 N 16 RR	1600	60	550	105/100	134/100	0,75	5,50	1,08	150	1200	M_E2j/106	50
3 phase bridge rectifier, uncontrolled with brake chopper and NTC	DD B6U 134 N 16 RR	1600	80	550	134/100	134/100	0,75	6,30	0,7	150	1200	M_E2j/106	70
3 phase bridge rectifier, halfcontrolled with brake chopper and NTC	TD B6HK 124 N 16 RR	1600	70	550	125/85	125/85	0,75	6,30	0,63	125	1200	M_E2j/106	70
3 phase bridge rectifier, halfcontrolled with brake chopper (PressFIT)	TD B6HK 180 N 16 RR_B11	1600											

data on request

## ISOPACK™ Bridge Rectifier

Type	$V_{DRM}$ , $V_{FRM}$ $V_{DSM} = V_{DRM}$ $V_{HSM} = V_{FRM} + 100V$	$I_{FRSM}$ ( $I_{TRMSM}$ ) A	$I_{FSM}$ ( $I_{TSM}$ ) A 10 ms, $T_{vj\ max}$	$I_{dTC}$ A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\ max}$	$R_{thJC}$ °C/W $T_{vj} = T_{vj\ max}$	$R_{thJC}$ °C/W per arm 120° el Square wave	Outline/ page	$T_{vj\ max}$ °C
3 phase bridge rectifier, uncontrolled									DD B6U 85 N 11
									DD B6U 145 N 11
3 phase bridge rectifier, uncontrolled									M_1Pa/107
									M_1Pa/107
3 phase bridge rectifier, half controlled									TD B6HK 95 N 21
									TD B6HK 135 N 21
3 phase bridge rectifier, half controlled									M_1Pb/107
									M_1Pb/107
3 phase bridge rectifier, fully controlled									TT B6C 95 N 21
									TT B6C 135 N 21
3 phase bridge rectifier, fully controlled									M_1Pb/107
									M_1Pb/107


## ISOPACK™ AC-Switches

Type	$V_{DRM}$ , $V_{FRM}$ $V_{DSM} = V_{DRM}$ $V_{HSM} = V_{FRM} + 100V$	$I_{FRSM}$ ( $I_{TRMSM}$ ) A	$I_{FSM}$ ( $I_{TSM}$ ) A 10 ms, $T_{vj\ max}$	$I_{dTC}$ A/°C	$V_{(TO)}$ V $T_{vj} = T_{vj\ max}$	$R_{thJC}$ °C/W per arm 180° el Sinus	Outline/ page	$T_{vj\ max}$ °C
3 phase AC-Switches, fully controlled								TT W3C 85 N 21
								TT W3C 115 N 21
3 phase AC-Switches, fully controlled								M_1Pb/107
								M_1Pb/107

ISOPACK™ modules are UL recognized

Sets of screws will be included at customer's request at no cost. Requests must be made at time of order.

# Overview PowerBLOCK Thyristor Modules for Phase Control

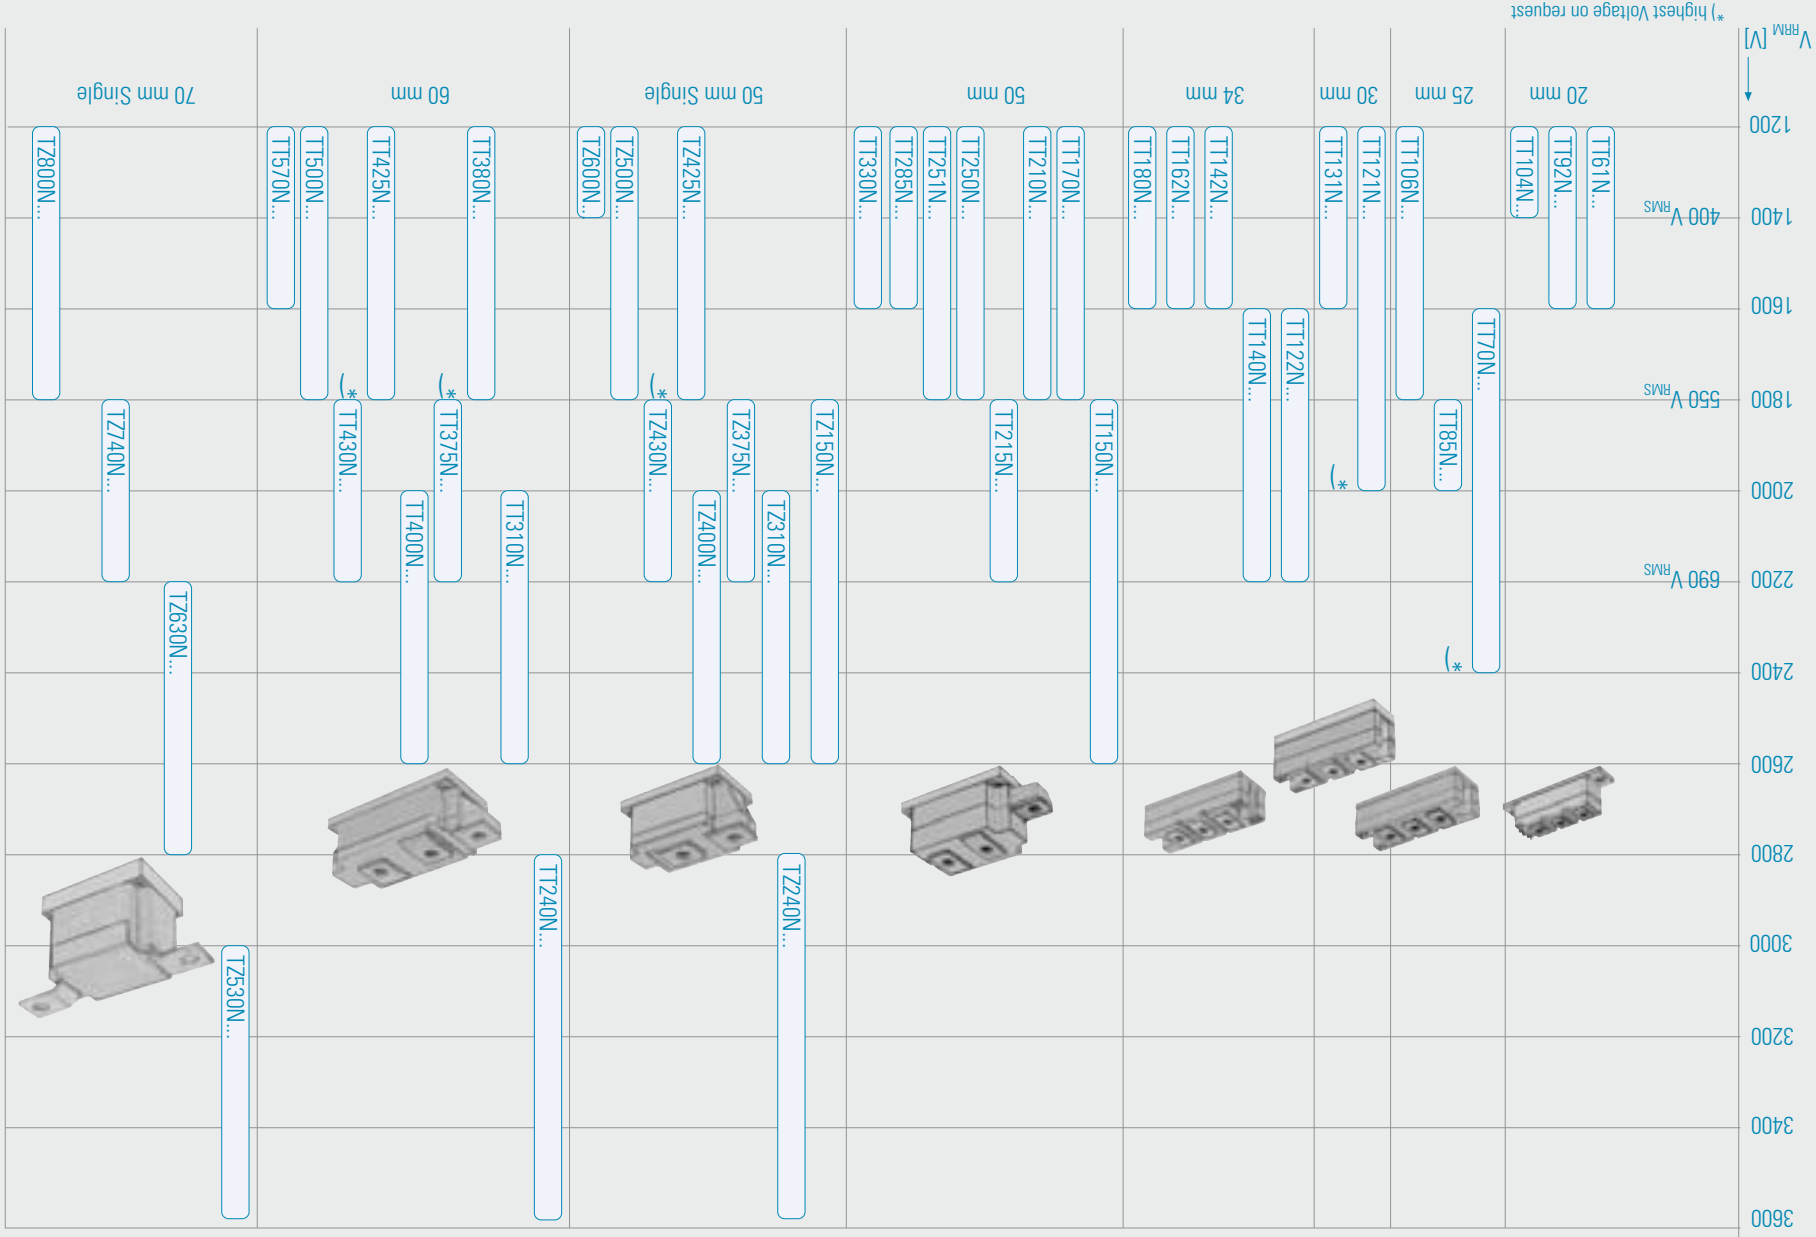

(\*) highest Voltage on request


PowerBLOCK Thyristor Modules for Phase Control

Type	$V_{DRM}$ V	$V_{DSM} = V_{DRM}$ V	$V_{RSM} = V_{DRM} + 100$ V	$I_{TRMSM}$ A	$I_{TSM}$ A	$A_2 \cdot 10^3$ A/°C	$f_{Tc}$ 10 ms, $T_{vj\ max}$	$t_{AVM}/T_c$ 180° el sin	$V_{(10)}$ V	$T_{vj} = T_{vj\ max}$	$r_T$ m $\Omega$	$(di/dt)_{cr}$ A/ $\mu$ s DIN IEC 747 - 6	$t_f$ $\mu$ s typ.	$R_{thJC}$ °C/W	$R_{thLC}$ °C/W	$180^\circ$ el sin	Outline / page
Baseplate	1200 ... 1600	1200 ... 1600	1200 ... 1400	120	1400	9,80	60/85	3,40	0,80	2,15	150	120	F = 1000	0,520	0,16		TP20/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	160	1800	16,20	92/85	2,15	0,85	2,15	150	150	F = 1000	0,370	0,10		TP20/108
	1200 ... 1400	1200 ... 1600	1200 ... 1400	160	1800	16,20	104/85	2,15	0,85	2,15	150	150	F = 1000	0,370	0,10		TP20/108
Baseplate	1600 ... 2400*	1800 ... 2000	1200 ... 1800	150	1450	10,50	70/85	3,80	1,00	2,60	100	300	F = 1000	0,350	0,08		TP25/108
	1800 ... 2000	1800 ... 2000	1800 ... 2000	180	2000	20,00	85/85	2,60	0,90	2,60	150	150	F = 1000	0,330	0,08		TP25/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	180	2000	20,00	106/85	2,60	0,90	2,60	150	150	F = 1000	0,330	0,08		TP25/108
Baseplate	1600 ... 2200	1600 ... 2200	1600 ... 2200	220	2950	43,50	122/85	2,15	1,00	2,15	100	300	F = 1000	0,200	0,06		TP34/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	230	4100	84,00	142/85	1,10	0,90	1,10	150	200	F = 1000	0,220	0,06		TP34/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	260	4400	97,00	162/85	0,95	0,85	0,95	150	200	F = 1000	0,200	0,06		TP34/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	285	4100	84,00	180/85	0,85	0,85	0,90	150	200	F = 1000	0,200	0,06		TP34/108
Baseplate	1800 ... 2600	1800 ... 2200	1800 ... 2200	350	4600	106,00	170/85	1,00	0,95	1,00	60	300	F = 1000	0,130	0,04		TP50/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	410	5800	168,00	210/85	1,00	0,85	1,00	150	200	F = 1000	0,130	0,04		TP50/108
	1800 ... 2200	1800 ... 2200	1800 ... 2200	410	6300	198,00	215/85	0,95	0,95	0,92	100	300	F = 1000	0,130	0,04		TP50/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	410	7000	245,00	250/85	0,80	0,80	0,70	150	250	F = 1000	0,130	0,04		TP50/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	410	8000	320,00	250/85	0,70	0,80	0,70	250	250	F = 1000	0,130	0,04		TP50/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	450	8000	320,00	285/92	0,70	0,80	0,70	250	250	F = 1000	0,117	0,04		TP50/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	520	8000	320,00	330/85	0,60	0,80	0,60	250	250	F = 1000	0,117	0,04		TP50/108
Baseplate	2800 ... 3600	1800 ... 2600	2800 ... 3600	700	5500	151,00	240/85	1,17	1,17	1,70	100	350	F = 1000	0,078	0,02		TP60/108
	2000 ... 2600	2000 ... 2600	2000 ... 2600	700	9000	405,00	310/85	1,00	0,85	0,86	120	300	F = 1000	0,078	0,02		TP60/108
	1800 ... 2200	1800 ... 2200	1800 ... 2200	900	10600	561,00	375/85	0,56	0,85	0,56	120	300	F = 1000	0,078	0,02		TP60/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	800	11000	605,00	380/85	1,00	0,38	1,00	120	250	F = 1000	0,078	0,02		TP60/108
	2000 ... 2600	2000 ... 2600	2000 ... 2600	800	11000	605,00	400/85	1,00	0,50	1,00	150	300	F = 1000	0,065	0,02		TP60/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	800	12500	781,00	425/85	0,30	0,90	0,30	120	250	F = 1000	0,078	0,02		TP60/108
	1800 ... 2200	1800 ... 2200	1800 ... 2200	800	12000	720,00	430/85	0,45	0,95	0,45	150	300	F = 1000	0,065	0,02		TP60/108
	1200 ... 1800	1200 ... 1800	1200 ... 1800	900	14500	1051,00	500/85	0,27	0,90	0,27	200	200	F = 1000	0,065	0,02		TP60/108
	1200 ... 1600	1200 ... 1600	1200 ... 1600	900	980,00	980,00	570/87	0,27	0,90	0,27	200	200	F = 1000	0,065	0,02		TP60/108

PowerBLOCK modules are UL recognized


Common anode or cathode on request

\* Highest voltage on request






Overview PowerBLOCK Thyristor/Diode Modules for Phase Control

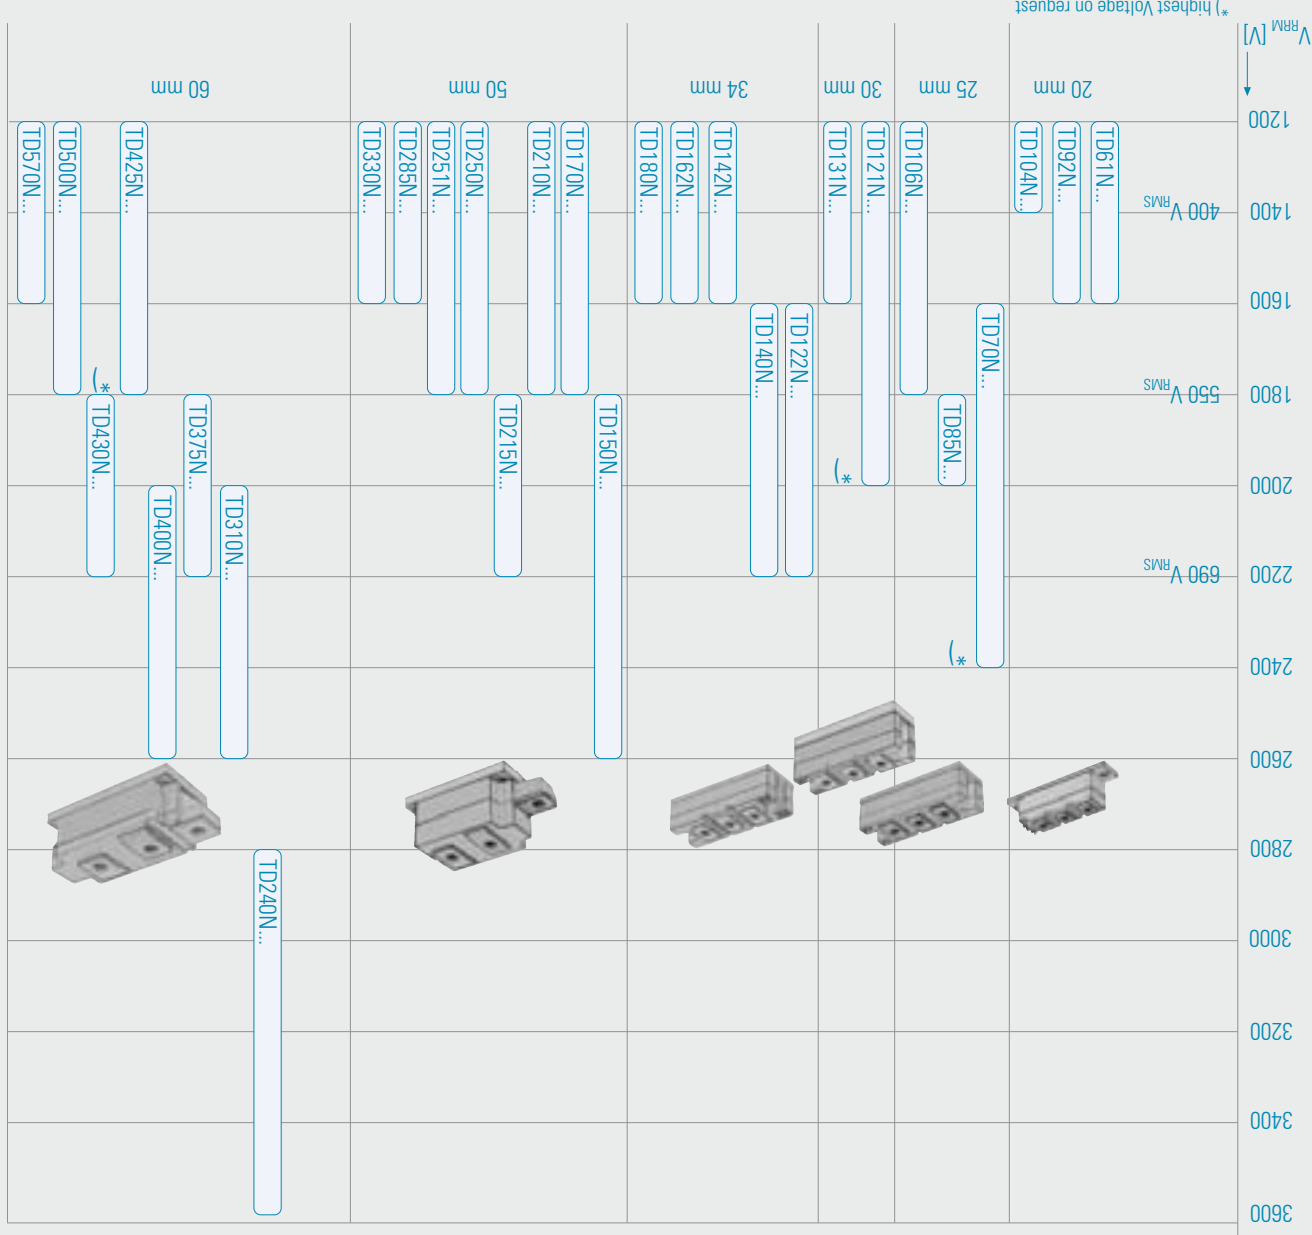


# PowerBLOCK Thyristor/Diode Modules for Phase Control



Type	$V_{DRM}$ V	$V_{DSM} = V_{DRM}$ V	$V_{RSM} = V_{DRM} + 100$ V	$I_{TRMSM}$ A	$I_{TSM}$ A	$I_{TSM}$ A	$f_T$ A <sup>-2</sup> ·10 <sup>3</sup>	$V(T_{10})$ V	$T_{vj} = T_{vjmax}$ V	$T_{vj} = T_{vjmax}$ mΩ	(di/dt) <sub>cr</sub> A/μs	DIN IEC 747 - 6	$t_{tr}$ μs	$R_{thJC}$ °C/W	$R_{thJC}$ °C/W	$T_{vjmax}$ °C	page Outline /
Baseplate = 20 mm	TD 61 N	1200 ... 1600	1200 ... 1600	1200 ... 1400	120	1400	9,80	60/85	0,80	3,40	150	120	F = 1000	0,52	0,16	125	TP20/105
	TD 92 N	1200 ... 1600	1200 ... 1600	1200 ... 1600	160	1800	16,20	92/85	0,85	2,15	150	150	F = 1000	0,37	0,1	130	TP20/105
Baseplate = 25 mm	TD 70 N	1600 ... 2400*	1800 ... 2000	1800 ... 1800	150	1450	10,50	70/85	1,00	3,80	100	300	F = 1000	0,35	0,08	125	TP25/105
	TD 85 N	1800 ... 2000	1800 ... 2000	1800 ... 2000	180	2000	20,00	85/85	0,90	2,60	150	150	F = 1000	0,33	0,08	125	TP25/105
Baseplate = 30 mm	TD 121 N	1200 ... 2000*	1200 ... 1600	220	200	2350	27,60	121/85	0,85	2,00	150	180	F = 1000	0,23	0,06	125	TP30/108
	TD 131 N	1200 ... 1600	1200 ... 1600	220	220	3200	51,20	131/85	0,85	1,5	150	180	F = 1000	0,23	0,06	125	TP30/108
Baseplate = 34 mm	TD 122 N	1600 ... 2200	1600 ... 2200	220	220	2950	43,50	122/85	1,00	2,15	100	300	F = 1000	0,20	0,06	125	TP34/108
	TD 140 N	1600 ... 2200	1600 ... 2200	250	250	3200	51,20	140/85	0,90	1,75	150	300	F = 1000	0,19	0,06	125	TP34/108
Baseplate = 34 mm	TD 142 N	1200 ... 1600	1200 ... 1600	230	230	4100	84,00	142/85	0,90	1,10	150	200	F = 1000	0,22	0,06	125	TP34/108
	TD 162 N	1200 ... 1600	1200 ... 1600	260	260	4400	97,00	162/85	0,85	0,95	150	200	F = 1000	0,20	0,06	125	TP34/108
Baseplate = 34 mm	TD 180 N	1200 ... 1600	1200 ... 1600	285	285	4100	84,00	180/85	0,85	0,90	150	200	F = 1000	0,20	0,06	130	TP34/108
	TD 150 N	1800 ... 2600	1800 ... 1800	350	350	4000	80,00	150/85	1,20	2,30	60	300	F = 1000	0,13	0,04	125	TP50/108
Baseplate = 50 mm	TD 170 N	1200 ... 1800	1200 ... 1800	410	350	4600	106,00	170/85	0,95	1,00	150	250	F = 1000	0,17	0,04	125	TP50/108
	TD 210 N	1800 ... 2200	1800 ... 1800	410	350	5800	168,00	210/85	1,00	0,85	150	200	F = 1000	0,13	0,04	125	TP50/108
Baseplate = 50 mm	TD 215 N	1800 ... 2200	1800 ... 2200	410	350	6300	198,00	215/85	0,95	0,92	100	300	F = 1000	0,13	0,04	125	TP50/108
	TD 250 N	1200 ... 1800	1200 ... 1800	410	410	7000	245,00	250/85	0,80	0,70	150	250	F = 1000	0,13	0,04	125	TP50/108
Baseplate = 50 mm	TD 251 N	1200 ... 1800	1200 ... 1800	410	410	8000	320,00	250/85	0,80	0,70	250	250	F = 1000	0,13	0,04	125	TP50/108
	TD 285 N	1200 ... 1600	1200 ... 1600	450	450	8000	320,00	285/92	0,80	0,70	250	250	F = 1000	0,117	0,04	135	TP50/108
Baseplate = 60 mm	TD 330 N	1200 ... 1600	1200 ... 1600	520	520	8000	320,00	330/85	0,80	0,60	250	250	F = 1000	0,117	0,04	135	TP50/108
	TD 240 N	2800 ... 3600	2000 ... 2600	700	700	5500	151,00	240/85	1,17	1,70	100	350	F = 1000	0,078	0,02	125	TP60/108
Baseplate = 60 mm	TD 310 N	2000 ... 2600	1800 ... 2200	700	908	9000	405,00	310/85	1,00	0,86	120	300	F = 1000	0,078	0,02	125	TP60/108
	TD 375 N	1800 ... 2200	2000 ... 2600	908	908	10600	561,00	375/85	0,85	0,56	120	300	F = 1000	0,078	0,02	125	TP60/108
Baseplate = 60 mm	TD 400 N	2000 ... 2600	1800 ... 2200	800	800	11000	605,00	400/85	1,00	0,50	150	300	F = 1000	0,065	0,02	125	TP60/108
	TD 425 N	1200 ... 1800	1200 ... 1800	800	800	12500	781,00	425/85	0,90	0,30	120	250	F = 1000	0,078	0,02	125	TP60/108
Baseplate = 60 mm	TD 430 N	1800 ... 2200	1800 ... 2200	800	800	12000	720,00	430/85	0,95	0,45	150	300	F = 1000	0,065	0,02	125	TP60/108
	TD 500 N	1200 ... 1800	1200 ... 1800	900	900	14500	1051,00	500/85	0,90	0,27	200	200	F = 1000	0,065	0,02	125	TP60/108
Baseplate = 60 mm	TD 570 N	1200 ... 1600	1200 ... 1600	900	900	14000	980,00	570/87	0,90	0,27	200	200	F = 1000	0,065	0,02	135	TP60/108
	TD 570 N	1200 ... 1600	1200 ... 1600	900	900	14000	980,00	570/87	0,90	0,27	250	250	F = 1000	0,065	0,02	135	TP60/108

PowerBLOCK modules are UL recognized  
 Common anode or cathode on request  
 \* Highest voltage on request  
 Modules for current source inverter with higher blocking Diodes on request


Overview PowerBLOCK Diode/Thyristor Modules for Phase Control

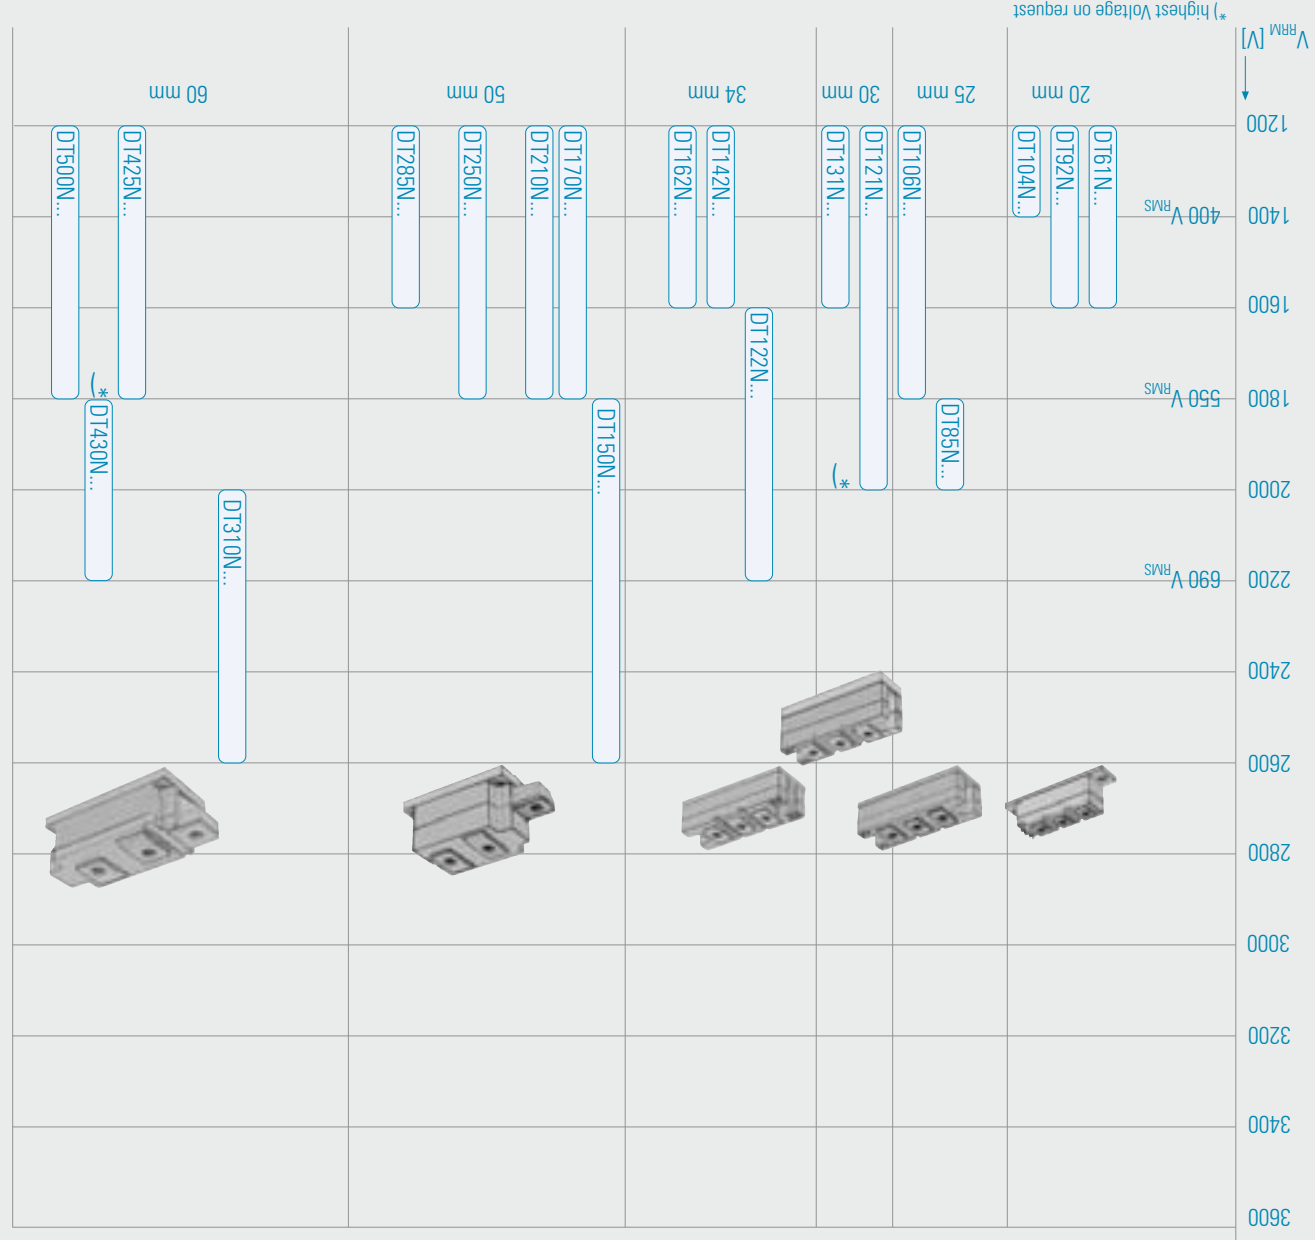

\* ) highest Voltage on request




# PowerBLOCK Diode/Thyristor Modules for Phase Control




Type	$V_{DRM}$ $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{DRM} + 100\text{ V}$	$I_{TRMSM}$ A	$I_{TSM}$ A	$I_{TSM}$ 10 ms, A	$I_{TSM}$ 10 ms, A	$f_T$ A $^2$ ·10 $^3$ 10 ms, A	$T_{AVM}/T_c$ 180° el sin A/°C	$T_{VI} = T_{VJmax}$ V	$T_{VI} = T_{VJmax}$ m $\Omega$	(dt/dt) <sub>cr</sub> DIN A/ $\mu$ s IEC 747 - 6	$t_f$ $\mu$ s typ.	(dv/dt) <sub>cr</sub> V/ $\mu$ s DIN IEC 747 - 6	$R_{thJC}$ °C/W 180° el sin	$R_{thCK}$ °C/W	$T_{VI max}$ °C	Outline/ page
Baseplate = 20 mm	DT 61 N	1200 ... 1600	120	1400	1400	9,80	60/85	0,80	3,40	150	120	F = 1000	0,52	0,16	125	TP20/108
	DT 92 N	1200 ... 1600	160	1800	1800	16,20	92/85	0,85	2,15	150	150	F = 1000	0,37	0,10	130	TP20/108
	DT 104 N	1200 ... 1400	160	1800	1800	16,20	104/85	0,85	2,15	150	150	F = 1000	0,37	0,10	140	TP20/108
Baseplate = 25 mm	DT 85 N	1800 ... 2000	180	2000	2000	20,00	85/85	0,90	2,60	150	150	F = 1000	0,33	0,08	125	TP25/108
	DT 106 N	1200 ... 1800	180	2000	2000	20,00	106/85	0,90	2,60	150	150	F = 1000	0,33	0,08	140	TP25/108
Baseplate = 30 mm	DT 121 N	1200 ... 2000*	200	2350	3200	27,60	121/85	0,85	2,00	150	180	F = 1000	0,23	0,06	125	TP30/108
	DT 131 N	1200 ... 1600	220	3200	51,20	131/85	0,85	1,50	2,00	150	180	F = 1000	0,23	0,06	125	TP30/108
	DT 122 N	1600 ... 2200	220	2950	43,50	122/85	1,00	2,15	100	300	100	F = 1000	0,2	0,06	125	TP34/108
Baseplate = 34 mm	DT 142 N	1200 ... 1600	230	4100	84,00	142/85	0,90	1,10	150	200	200	F = 1000	0,22	0,06	125	TP34/108
	DT 162 N	1200 ... 1600	260	4400	97,00	162/85	0,85	0,95	150	200	200	F = 1000	0,2	0,06	125	TP34/108
	DT 122 N	1600 ... 2200	220	2950	43,50	122/85	1,00	2,15	100	300	100	F = 1000	0,2	0,06	125	TP34/108
Baseplate = 50 mm	DT 150 N	1800 ... 2600	350	4000	80,00	150/85	1,20	2,30	60	300	300	F = 1000	0,13	0,04	125	TP50/108
	DT 170 N	1200 ... 1800	350	4600	106,00	170/85	0,95	1,00	150	250	250	F = 1000	0,17	0,04	125	TP50/108
	DT 210 N	1200 ... 1800	410	5800	168,00	210/85	1,00	0,85	150	200	200	F = 1000	0,13	0,04	125	TP50/108
	DT 250 N	1200 ... 1800	410	7000	245,00	250/85	0,80	0,70	150	250	250	F = 1000	0,13	0,04	125	TP50/108
	DT 285 N	1200 ... 1600	450	8000	320,00	285/92	0,80	0,70	250	250	250	F = 1000	0,13	0,04	135	TP50/108
Baseplate = 60 mm	DT 310 N	2000 ... 2600	700	9000	405,00	310/85	1,00	0,86	120	300	300	F = 1000	0,078	0,02	125	TP60/108
	DT 425 N	1200 ... 1800	800	12500	781,00	425/85	0,90	0,30	120	250	250	F = 1000	0,078	0,02	125	TP60/108
	DT 430 N	1800 ... 2200	800	12000	720,00	430/85	0,95	0,45	150	300	300	F = 1000	0,065	0,02	125	TP60/108
	DT 500 N	1200 ... 1800	900	14500	1051,00	500/85	0,90	0,27	200	200	200	F = 1000	0,065	0,02	125	TP60/108

PowerBLOCK modules are UL recognized  
 Common anode or cathode on request  
 \* Highest voltage on request  
 Modules for current source inverter with higher blocking Diodes on request

Overview PowerBLOCK Diode Modules for Phase Control

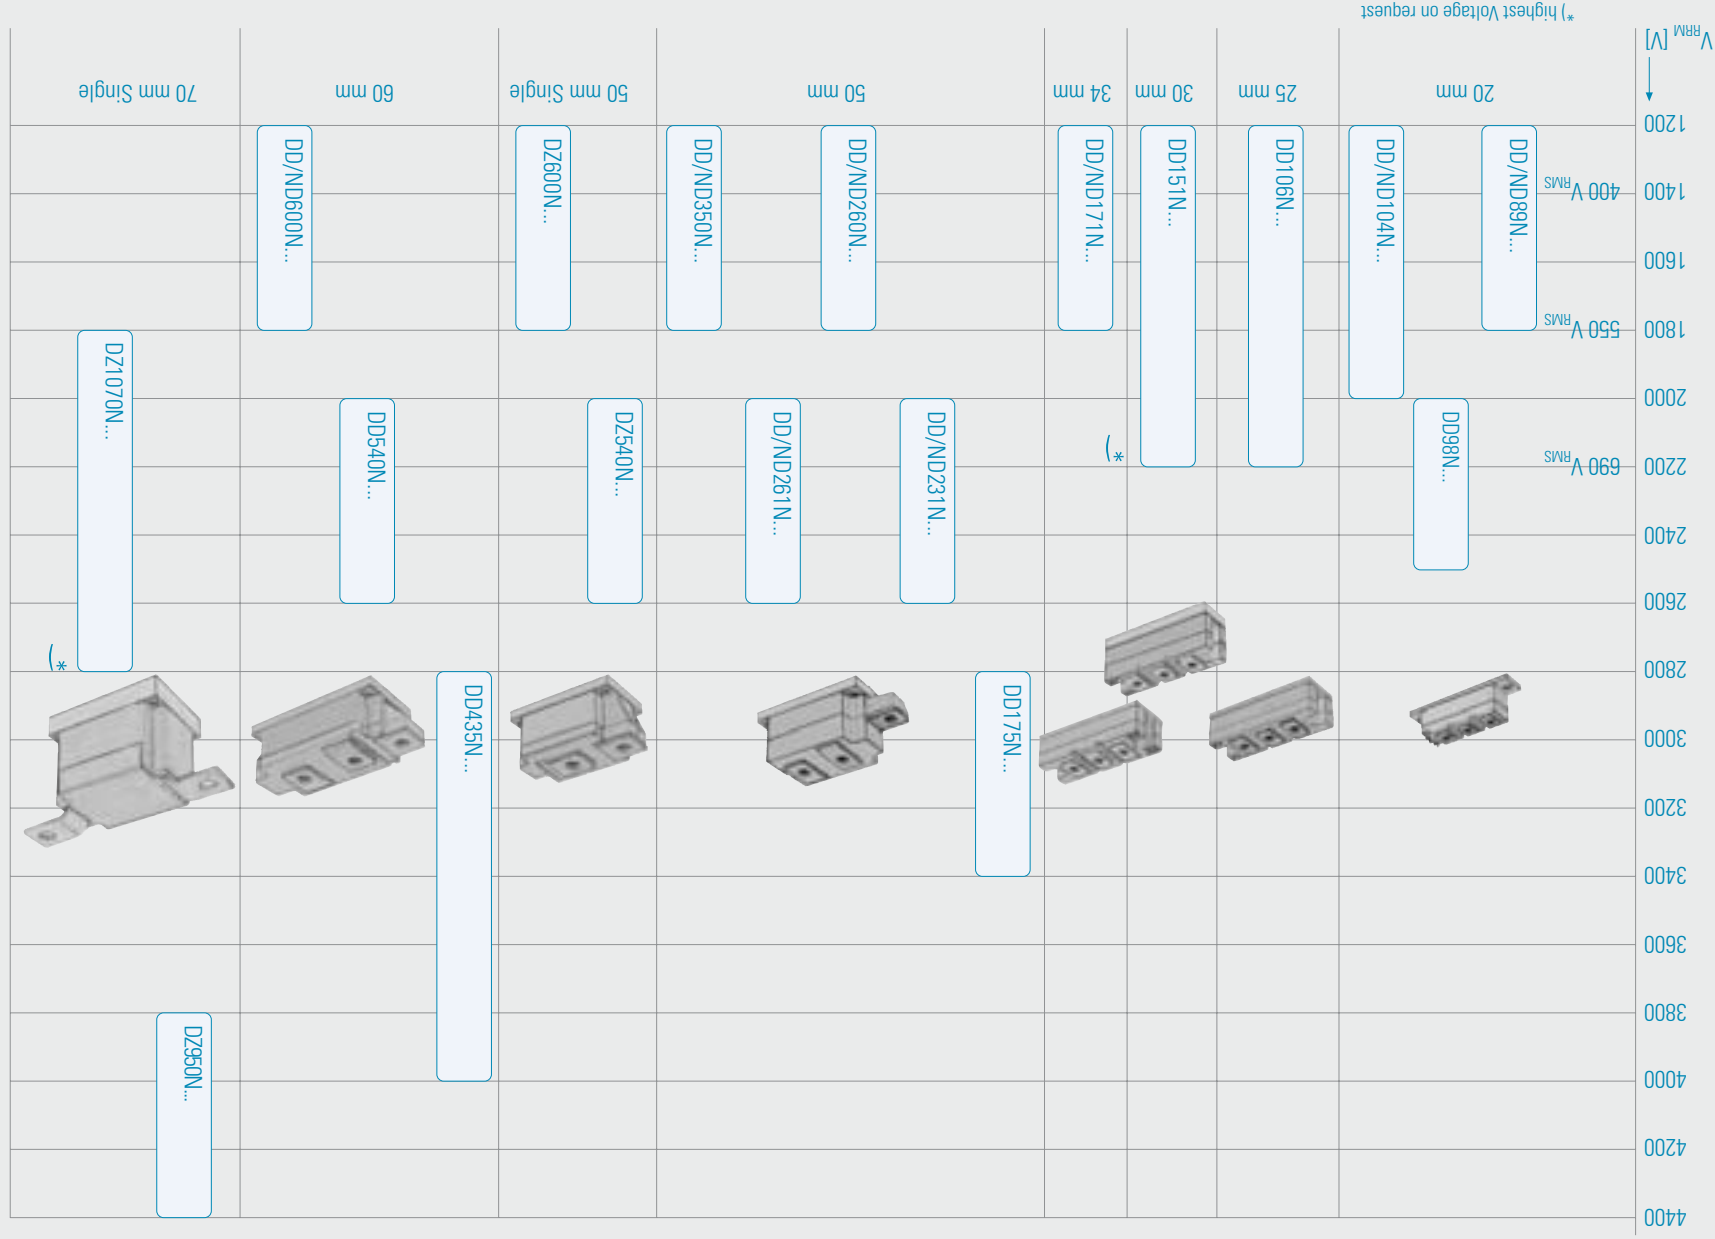

PowerBLOCK Rectifier Diode Modules for Phase Control



Type	$V_{RHM}$ V	$V_{RSM} = V_{RHM} + 100V$	$I_{RSM}$ A	$I_{RSM}$ A	$I_{FSM}$ A	$I_{FSM}$ A	$I_{FSM}$ A	$f_{Tc}$ $A \cdot s \cdot 10^3$	$t_{vj}$ 10 ms,	$V_{(10)}$ V	$T_{vj} = T_{vj \max}$	$T_{vj} = T_{vj \max}$	$R_{thjc}$ $^{\circ}C/W$	$R_{thjc}$ $180^{\circ}$ el sin $^{\circ}C/W$	$R_{thck}$ $^{\circ}C/W$	$T_{vj \max}$ $^{\circ}C$	Outline / page
Baseplate	DD 89 N	1200 ... 1800	140	2400	28.80	89/100	28.80	7.75	2.30	7.75	2.30	0.450	0.10	0.10	150	DP20/109	
= 20 mm	ND 89 N	1200 ... 1800	140	2400	28.80	89/100	28.80	7.75	2.30	7.75	2.30	0.450	0.10	0.10	150	DP20/109	
	DD 98 N	2000 ... 2500	160	2000	20.00	98/100	20.00	0.82	2.00	0.82	2.00	0.390	0.10	0.10	150	DP20/109	
	ND 104 N	1200 ... 1800	160	2500	31.25	104/100	31.25	0.70	2.10	0.70	2.10	0.390	0.10	0.10	150	DP20/109	
Baseplate	DD 106 N	1200 ... 2200	180	2600	33.80	106/100	33.80	0.70	2.00	0.70	2.00	0.390	0.08	0.08	150	DP25/109	
= 30 mm	Baseplate	DD 151 N	1200 ... 2200*	240	4600	105.80	151/100	0.75	0.90	0.75	0.90	0.300	0.06	0.06	150	DP30/109	
	Baseplate	DD 171 N	1200 ... 1800	270	5600	157.00	170/100	0.75	0.80	0.75	0.80	0.260	0.06	0.06	150	DP34/110	
	Baseplate	DD 175 N	3000 ... 3400	350	4000	80.00	175/100	0.90	1.80	0.90	1.80	0.170	0.04	0.04	150	DP50/110	
= 50 mm	DD 231 N	2000 ... 2600	410	6400	205.00	231/100	205.00	0.80	0.84	0.80	0.84	0.170	0.04	0.04	150	DP50/110	
	ND 231 N	2000 ... 2600	410	6400	205.00	231/100	205.00	0.80	0.84	0.80	0.84	0.170	0.04	0.04	150	DP50/110	
	DD 260 N	1200 ... 1800	410	8300	344.00	260/100	344.00	0.70	0.68	0.70	0.68	0.170	0.04	0.04	150	DP50/110	
	ND 260 N	1200 ... 1800	410	8300	344.00	260/100	344.00	0.70	0.68	0.70	0.68	0.170	0.04	0.04	150	DP50ND/110	
	DD 261 N	2000 ... 2600	410	8300	344.00	260/100	344.00	0.70	0.68	0.70	0.68	0.170	0.04	0.04	150	DP50/110	
	ND 261 N	2000 ... 2600	410	8300	344.00	260/100	344.00	0.70	0.68	0.70	0.68	0.170	0.04	0.04	150	DP50ND/110	
	DD 285 N	400 ... 800(1)	450	8300	344.00	285/100	344.00	0.75	0.40	0.40	0.75	0.170	0.04	0.04	150	DP50/110	
	ND 350 N	1200 ... 1800	550	11000	605.00	350/100	605.00	0.75	0.40	0.40	0.75	0.130	0.04	0.04	150	DP50/110	
	ND 350 N	1200 ... 1800	550	11000	605.00	350/100	605.00	0.75	0.40	0.40	0.75	0.130	0.04	0.04	150	DP50ND/110	
	DD 435 N	2800 ... 4000	1100	12000	720.00	435/100	720.00	0.84	0.60	0.60	0.84	0.078	0.02	0.02	150	DP60/110	
	DD 540 N	2000 ... 2600	900	14000	980.00	540/100	980.00	0.78	0.31	0.31	0.78	0.078	0.02	0.02	150	DP60/110	
	= 60 mm	DD 600 N	1200 ... 1800	950	19000	1800.00	600/100	1800.00	0.75	0.215	0.75	0.215	0.078	0.02	0.02	150	DP60/110
ND 600 N		1200 ... 1800	950	19000	1800.00	600/100	1800.00	0.75	0.215	0.75	0.215	0.078	0.02	0.02	150	DP60/110	
DD 700 N		1800 ... 2200	1100	21000	2205.00	700/100	2205.00	0.78	0.185	0.78	0.185	0.065	0.02	0.02	150	DP60/110	
Baseplate	DD 950 N	3600 ... 4400	1500	29000	4205.00	950/100	4205.00	0.85	0.28	0.85	0.28	0.042	0.01	0.01	150	DP70/110	
	Baseplate	DD 1070 N	1800 ... 2800*	1700	35000	6125.00	1070/100	0.80	0.17	0.80	0.17	0.045	0.01	0.01	160	DP70/110	

■ Not for new design

◆ New type

Common anode or cathode on request  
 $V_{RSM} = V_{RHM} + 50V$

\* Highest voltage on request

# PowerBLOCK Fast Thyristor Modules

## SCR/Diode Modules

## IGBT


## Presspacks

## Stacks

## Outlines

## Accessories

## Explanations





Type	$V_{DHM}$ $V_{RSM} = V_{DHM}$ $V_{DSM} = V_{RSM} + 100 V$	A	$I_{TRMSM}$ A	$I_{TSM}$ A	$A_2 \cdot 10^3$ 10 ms, $T_{vj\ max}$	$I_{AVM}/T_c$ $A/^\circ C$ 180° el sin	$V_{(10)}$ V $T_{vj} = T_{vj\ max}$	$r_T$ m $\Omega$ $T_{vj} = T_{vj\ max}$	$(di/dt)_{cr}$ A/ $\mu s$ DIN IEC 747 - 6	$t_q$ $\mu s$ typ.	$(dv/dt)_{cr}$ V/ $\mu s$ 747 - 6 DIN IEC	$R_{thJC}$ $^\circ C/W$ 180° el sin	$R_{thCK}$ $^\circ C/W$	$T_{vj\ max}$ $^\circ C$	Outline / page
Baseplate = 20 mm	600	120	1150	1150	6,6	45/85	1,30	3,40	120	G $\leq$ 30	F = 1000	0,52	0,16	125	TP20/108
TT 46 F06 KGF	1200	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	M = 1000	0,52	0,16	125	TP20/108
TT 46 F12 KFM	1200	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
TT 46 F10 KFC	1000	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
TT 46 F10 KDC	1000	120	1150	1150	6,6	45/85	1,30	3,40	120	D $\leq$ 15	C = 500	0,52	0,16	125	TP20/108
TT 46 F10 KDC	1000	120	1150	1150	6,6	45/85	1,30	3,40	120	D $\leq$ 15	C = 500	0,52	0,16	125	TP20/108
TT 46 F10 KFC	1000	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
TT 46 F12 KFC	1200	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
TT 46 F08 KDC	800	120	1150	1150	6,6	45/85	1,30	3,40	120	D $\leq$ 15	C = 500	0,52	0,16	125	TP20/108
TT 46 F08 KDC	800	120	1150	1150	6,6	45/85	1,30	3,40	120	D $\leq$ 15	C = 500	0,52	0,16	125	TP20/108
TT 46 F10 KFC	1000	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
TT 46 F12 KFC	1200	120	1150	1150	6,6	45/85	1,30	3,40	120	F $\leq$ 25	C = 500	0,52	0,16	125	TP20/108
Baseplate = 25 mm	1100	150	1300	1300	8,45	60/85	1,30	4,00	200	D $\leq$ 15	M = 1000	0,35	0,08	125	TP25/108
TT 101 F12 KFC	1200	200	2400	2400	28,8	101/85	1,20	2,10	160	F $\leq$ 25	C = 500	0,23	0,06	125	TP30/108
TT 111 F06 KSC-A <sup>1)</sup>	600	200	2600	2600	33,8	111/85	1,20	1,40	200	S $\leq$ 18	C = 500	0,23	0,06	125	TP30/108
TT 111 F08 KSC <sup>1)</sup>	800	200	2600	2600	33,8	111/85	1,20	1,40	200	S $\leq$ 18	C = 500	0,23	0,06	125	TP30/108
Baseplate = 30 mm	1200	350	6000	6000	180,0	180/85	1,30	0,90	200	F $\leq$ 25	C = 500	0,13	0,04	125	TP50/108
TD 180 F12 KFC	1300	350	6000	6000	180,0	180/85	1,30	0,90	200	F $\leq$ 25	L = 500	0,13	0,04	125	TP50/108
TD 180 F13 KFL	1300	350	6000	6000	180,0	180/85	1,30	0,90	200	F $\leq$ 25	L = 500	0,13	0,04	125	TP50/108
DT 180 F12 KFC	1200	350	6000	6000	180,0	180/85	1,30	0,90	200	F $\leq$ 25	C = 500	0,13	0,04	125	TP50/108
Baseplate = 50 mm	1200	700	10000	10000	500,0	335/85	1,15	0,42	200	F $\leq$ 25	M = 1000	0,08	0,02	125	TP50.1/108
TZ 335 F12 KFM	1200	700	10000	10000	500,0	335/85	1,15	0,42	200	F $\leq$ 25	M = 1000	0,08	0,02	125	TP50.1/108
TZ 335 F12 KGC	1200	700	10000	10000	500,0	335/85	1,15	0,42	200	G $\leq$ 30	C = 500	0,08	0,02	125	TP50.1/108

PowerBLOCK modules are UL recognized  
<sup>1)</sup>  $V_{RSM} = V_{RHM} + 50 V$   
 all PowerBLOCK Fast Thyristor Modules not for new design

# PowerBLOCK Fast Asymmetric Thyristor Modules

Type	$V_{DRM}$ V	$V_{DRM} = V_{DHM}$ V	$V_{RRM}$ V	$V_{RRM(C)}$ V	$t_p = 1 \mu s$	$I_{TRSM}$ A	$I_{TSM}$ A	$10 \text{ ms}$ , $T_{vj \text{ max}}$	$\int I^2 dt$ $A^2 \cdot 10^3$ 10 ms, $T_{vj \text{ max}}$	$I_{TAVM}/T_c$ $A/^\circ C$ $180^\circ \text{ el sin}$	$V(T0)$ V	$T_{vj} = T_{vj \text{ max}}$	$T_r$ $m\Omega$	$(di/dt)_{cr}$ A/ $\mu s$ DIN IEC 747 - 6	$t_f$ $\mu s$ typ.	$(dv/dt)_{cr}$ V/ $\mu s$ DIN IEC 747 - 6	$R_{thJC}$ $^\circ C/W$ $180^\circ \text{ el sin}$	$R_{thCK}$ $^\circ C/W$	$T_{vj \text{ max}}$ $^\circ C$	Outline / page
AD 96 S08 KAF	800		15 [50]	200	2350	27,6	95/85	1,3	2,15	400	A $\leq$ 8	F = 1000	0,23	0,06	125	TP34/108				
AD 96 S11 KAC	1100		15 [50]	200	2350	27,6	95/85	1,3	2,15	400	A $\leq$ 8	C = 500	0,23	0,06	125	TP34/108				
AD 116 S10 KBC	1000		15 [50]	220	2600	33,8	115/85	1,1	1,45	400	B $\leq$ 10	C = 500	0,23	0,06	125	TP34/108				
AD 116 S10 KDC	1000		15 [50]	220	2600	33,8	115/85	1,1	1,45	400	D $\leq$ 15	C = 500	0,23	0,06	125	TP34/108				
AD 116 S10 KDF	1000		15 [50]	220	2600	33,8	115/85	1,1	1,45	400	D $\leq$ 15	F = 1000	0,23	0,06	125	TP34/108				
AD 180 S10 KBC	1000		15 [50]	350	4800	115,0	180/85	1,3	0,90	500	B $\leq$ 10	C = 500	0,13	0,04	125	TP50/108				
AD 180 S12 KBF	1200		15 [50]	350	4800	115,0	180/85	1,3	0,90	500	B $\leq$ 10	F = 1000	0,13	0,04	125	TP50/108				
AD 180 S12 KCF	1200		15 [50]	350	4800	115,0	180/85	1,3	0,90	500	C $\leq$ 12	F = 1000	0,13	0,04	125	TP50/108				
AD 180 S12 KDC	1200		15 [50]	350	4800	115,0	180/85	1,3	0,90	500	D $\leq$ 15	C = 500	0,13	0,04	125	TP50/108				
AD 220 S12 KDF	1200		15 [50]	410	5200	135,0	220/85	1,1	0,60	500	D $\leq$ 15	F = 1000	0,13	0,04	125	TP50/108				



PowerBLOCK modules are UL recognized

all PowerBLOCK Fast Asymmetric Thyristor Modules not for new design

# PowerBLOCK Fast Diode Modules

## SCR/Diode Modules

IGBT


Presspacks

Stacks

Outlines

Accessories

Explanations




Type	$V_{RSM}$ V	$V_{RSM} + 100V$ = $V_{RSM} + 100V$ (50 Hz)	$I_{FSM}$ A	$I_{FSM}$ A	$f_{T1}$ 10 ms,	$T_{vj\ max}$ 10 ms,	$f_{T2}$ A $\cdot$ s $\cdot$ 10 $^3$	$I_{FAVM}/T_c$ A $\cdot$ °C	$V_{(T1)}$ V	$T_{vj} = T_{vj\ max}$	$T_T$ m $\Omega$	$I_{RM}$ A	$R_{thjc}$ °C/W	$R_{thck}$ °C/W	$T_{vj\ max}$ °C	Outline / page
Baseplate	DD 46 S	800 ... 1200 <sup>1)</sup>	100	850	3,60	0,90	45/85				3,90		0,68	0,16	125	DP20/109
= 20 mm	DD 61 S	1000 ... 1400 <sup>1)</sup>	120	1600	12,80	1,00	61/100				2,20	82	0,62	0,16	150	DP20/109
	DD 62 S	400 ... 1000 <sup>1)</sup>	120	1600	12,80	1,00	61/100				2,20	62	0,62	0,16	150	DP20/109
	DD 81 S	1000 ... 1400 <sup>1)</sup>	150	1900	18,05	0,95	81/100				1,70	87	0,48	0,16	150	DP20/109
	DD 82 S	400 ... 1000 <sup>1)</sup>	150	1900	18,05	0,95	81/100				1,70	65	0,48	0,16	150	DP20/109
Baseplate	DD 121 S	1000 ... 1400 <sup>1)</sup>	200	2000	20,00	0,95	121/100				1,70	95	0,28	0,06	150	DP30/109
	DD 122 S	400 ... 1000 <sup>1)</sup>	200	2000	20,00	0,95	121/100				1,70	70	0,28	0,06	150	DP30/109
= 50 mm	DD 230 S	1800 ... 2600	410	7500	281,00	1,00	230/100				0,80		0,15	0,04	150	DP50/110
	DD 230 S	1800 ... 2600	410	7500	281,00	1,00	230/100				0,80		0,15	0,04	150	DP50/110
	DD 241 S	1000 ... 1400	410	7500	281,00	1,10	240/100				0,50	135	0,15	0,04	150	DP50/110
	DD 241 S	1000 ... 1400	410	7500	281,00	1,10	240/100				0,50	135	0,15	0,04	150	DP50/110
	DD 242 S	600 ... 1000 <sup>1)</sup>	410	7500	281,00	1,10	240/100				0,50	98	0,15	0,04	150	DP50/110
	DD 242 S	600 ... 1000 <sup>1)</sup>	410	7500	281,00	1,10	240/100				0,50	98	0,15	0,04	150	DP50/110
	ND 241 S	1000 ... 1400	410	7500	281,00	1,10	240/100				0,50	135	0,15	0,04	150	DP50/110
	ND 242 S	600 ... 1000 <sup>1)</sup>	410	7500	281,00	1,10	240/100				0,50	98	0,15	0,04	150	DP50/110

PowerBLOCK modules are UL recognized  
<sup>1)</sup>  $V_{RSM} \leq 1000\text{ V} : V_{RSM} = V_{RSM} + 50\text{ V}$   
 Common anode or cathode on request

# Overview Phase Control Thyristors in Disc Housings

V<sub>DM</sub> - Concept

Case Ø	Pellet Ø	41 mm	23 mm	25 mm	30 mm	32 mm	38 mm	42 mm	46 mm	51 mm	55/56 mm	58 mm	65 mm	75 mm	100 mm	120 mm	110 mm	150 mm	170 mm
8000 V																			
7000 V																			
6500 V																			
5200 V																			
5000 V																			
4800 V																			
4400 V																			
4200 V																			
4000 V																			
3800 V																			
3600 V																			
3400 V																			
3200 V																			
2900 V																			
2600 V																			
2400 V																			
2200 V																			
2000 V																			
1800 V																			
1600 V																			
1400 V																			
1200 V																			
600 V																			
400 V																			



High Power-Discs

Epoxy-Discs

## Pulsed Power Applications

Type	$V_{BO}$ V	$V_{RSM}$ V	$V_{TM}/I_{TM}$ V/kA	$I_{TSM}$ kA	$di/dt_{crit(on)}$ A/ $\mu$ s	$di/dt_{crit(off)}$ A/ $\mu$ s	$R_{th(jc)}$ $^{\circ}$ C/W	$T_{vj,max}$ $^{\circ}$ C	Outline / page
T 4003 NH	5200	5200	1,80/5	100	5000	5000	0,0045	120	T172.40L/115
T 1503 NH	7500	7500 ... 8000	3,00/4	55	5000	5000	0,0060	120	T150.40L/115
T 2563 NH	7500	7500 ... 8000	2,95/5	90	5000		0,0045	120	T172.40L/115
D 2601 NH		9000	5,50/4	22		7500	0,0075	140	D120.26K/119




# Phase Control Thyristors

up to 600 V



Type	$V_{DRM}^{(2)}$ $V_{DRM} = V_{RSM}$ $V_{DRM} = V_{RSM} + 50 V$	$A^2 \cdot 10^3$	$I_{TRMSM}$ A	$\int i^2 dt$	$I_{TSM}$ kA	$V_T/I_T$ V/kA	$I_{TAVM}$ A/°C	$V(T_0)$ V	$T_{vj} = T_{vj\ max}$	$T_r$ mΩ	$(di/dt)^{cr}$ A/μs	$t_q$ μs	$(dv/dt)^{cr}$ V/μs	$R_{thJC}$ °C/W	$T_{vj\ max}$ °C	Outline / page
T 210 N	200 ... 600	151	330	151	5,50	1,33/0,60	210	0,80	0,85	200	200	F = 1000	0,150	140	TSW27/11	
T 348 N	200 ... 600	80	600	80	4,9	2,00/1,10	348	1,00	0,70	200	200	F = 1000	0,100	140	T41.14/112	
T 398 N	200 ... 600	151	800	151	5,50	1,63/1,50	398	1,00	0,40	200	200	F = 1000	0,100	140	T41.14/112	
T 568 N	200 ... 600	225	900	225	6,70	1,76/2,00	568	0,80	0,44	200	200	F = 1000	0,068	140	T41.14/112	
T 828 N	200 ... 600	720	1500	720	12,00	1,65/2,50	828	1,00	0,23	300	300	F = 1000	0,045	140	T50.14/112	
T 1078 N	200 ... 600	1050	2000	1050	14,50	1,81/3,50	1078	1,02	0,20	200	200	F = 1000	0,033	140	T50.14/112	
T 1258 N	200 ... 600	2000	2500	2000	20,00	1,50/4,50	1258	1,00	0,10	120	120	F = 1000	0,033	140	T60.14/112	
T 2509 N	200 ... 600*	4900	4900	4900	42,00 <sup>1)</sup>	1,22/6,00	2509	0,75	0,072	200	200	F = 1000	0,0184	140	T75.26/112	
T 3709 N	200 ... 600*	7000	7000	18000	60,00 <sup>2)</sup>	1,50/15,00	3710	0,75	0,0475	200	200	F = 1000	0,0125	140	T100.26/112	

up to 1800 V



Type	$V_{DRM}$ $V_{DRM} = V_{RSM}$ $V_{DRM} = V_{RSM} + 100 V$	$A^2 \cdot 10^3$	$I_{TRMSM}$ A	$\int i^2 dt$	$I_{TSM}$ kA	$V_T/I_T$ V/kA	$I_{TAVM}$ A	$V(T_0)$ V	$T_{vj} = T_{vj\ max}$	$T_r$ mΩ	$(di/dt)^{cr}$ A/μs	$t_q$ μs	$(dv/dt)^{cr}$ V/μs	$R_{thJC}$ °C/W	$T_{vj\ max}$ °C	Outline / page
T 86 N	1200 ... 1800*	20	200	20	2,00	1,99/0,4	86	1,00	2,60	150	150	F = 1000	0,30	125	TSW27/11	
T 130 N	1200 ... 1800	45	300	45	3,00	1,96/0,6	130	1,08	1,53	180	180	F = 1000	0,20	125	TSW27/11	
T 160 N	1200 ... 1800	58	300	58	3,40	1,96/0,6	160	1,08	1,53	150	150	F = 1000	0,15	125	TFE36/11	
T 178 N	1200 ... 1800	34	300	34	2,60	1,9/0,6	178	0,92	1,50	180	180	F = 1000	0,14	125	TFE36/11	
T 178 N	1200 ... 1800	58	400	58	3,40	2,2/0,8	218	0,90	1,35	150	150	F = 1000	0,11	125	T41.14/112	
T 221 N	1200 ... 1800	163	450	163	5,70	1,74/0,8	221	1,10	0,75	150	150	F = 1000	0,12	125	TSW41/111	
T 298 N	600 ... 1600	90,6	600	42,5	4,25	2,0/1,1	298	0,85	0,90	150	150	F = 1000	0,088	125	T41.14/112	
T 345 N	1200 ... 1800	238	550	238	6,90	1,56/1,0	345	0,80	0,70	150	150	F = 1000	0,08	125	TFE54/111	
T 358 N	1200 ... 1800	106	700	106	4,60	2,07/1,2	358	0,85	0,90	150	150	F = 1000	0,068	125	T41.14/112	
T 370 N	1200 ... 1800	320	650	8,00	8,00	1,65/1,2	370	0,80	0,50	200	200	F = 1000	0,085	125	TSW41/111	
T 378 N	1200 ... 1600	202	800	6,35	6,35	1,85/1,2	378	0,80	0,75	150	150	F = 1000	0,068	125	T41.14/112	
T 388 N	1200 ... 1800	205	730	6,40	6,40	2,1/1,5	388	0,90	0,75	120	120	F = 1000	0,068	125	T50.14/112	
T 508 N	1200 ... 1800	238	800	6,90	6,90	1,92/1,6	510	0,80	0,60	120	120	F = 1000	0,053	125	T50.14/112	
T 509 N	1200 ... 1800	238	800	6,90	6,90	1,92/1,6	510	0,80	0,60	120	120	F = 1000	0,053	125	T57.26/112	

\* Highest voltage on request

<sup>1)</sup> Case non-rupture current 32 kA (sinusoidal half wave 50 Hz)

<sup>2)</sup> Case non-rupture current 38 kA

SCR / Diode Modules

Presspacks

Stacks

Outlines

Accessories

Explanations

# Phase Control Thyristors

up to 1800 V



Type	$V_{DRM}$ $V_{DRM} = V_{DSM} = V_{RSM} + 100V$	$V_{TRMSM}$ A	$A_S \cdot 10^3$ 10 ms	$J^2/dt$ $T_{vj} \text{ max}$	$I_{TSM}$ kA	$I_{TSM}$ 10 ms	$V_T/I_T$ V/kA	$I_{TAVM}$ A $T_c = 85^\circ\text{C}$	$V_{(T)0}$ V $T_{vj} = T_{vj} \text{ max}$	$r_T$ m $\Omega$ $T_{vj} = T_{vj} \text{ max}$	(dI/dt) <sub>cr</sub> A/ $\mu$ s 747 - 6	$t_q$ $\mu$ s typ.	(dV/dt) <sub>cr</sub> V/ $\mu$ s 747 - 6	$R_{thjC}$ $^\circ\text{C/W}$ 180° el sin	$T_{vj} \text{ max}$ $^\circ\text{C}$	Outline / page
T 588 N	1200 ... 1800	1250	320	8,00	2,15/2,4	8,00	2,15/2,4	588	0,80	0,50	200	250	F = 1000	0,045	125	T50.14/112
T 589 N	1200 ... 1800	1250	320	8,00	2,15/2,4	8,00	2,15/2,4	588	0,80	0,50	200	250	F = 1000	0,045	125	T57.26/112
T 618 N	1200 ... 1400	1250	451	9,50	1,75/2,0	618	1,75/2,0	618	0,80	0,42	200	250	F = 1000	0,045	125	T50.14/112
T 619 N	1200 ... 1400	1250	451	9,50	1,75/2,0	618	1,75/2,0	618	0,80	0,42	200	250	F = 1000	0,045	125	T57.26/112
T 648 N	1200 ... 1600	1300	605	11,00	2,10/2,5	649	2,10/2,5	649	1,00	0,38	120	250	F = 1000	0,038	125	T60.14/112
T 649 N	1200 ... 1600	1300	605	11,00	2,10/2,5	649	2,10/2,5	649	1,00	0,38	120	250	F = 1000	0,038	125	T57.26/112
T 718 N	1200 ... 1600	1500	781	12,50	1,94/3,0	718	1,94/3,0	718	0,85	0,35	120	250	F = 1000	0,038	125	T60.14/112
T 719 N	1200 ... 1600	1500	781	12,50	1,94/3,0	718	1,94/3,0	718	0,85	0,35	120	250	F = 1000	0,038	125	T57.26/112
T 878 N	1200 ... 1800	1750	1200	15,50	1,95/3,6	879	1,95/3,6	879	0,85	0,27	200	250	F = 1000	0,032	125	T60.14/112
T 879 N	1200 ... 1800	1750	1200	15,50	1,95/3,6	879	1,95/3,6	879	0,85	0,27	200	250	F = 1000	0,032	125	T57.26/112
T 1049 N	1200 ... 1800	1870	1280	16,00	1,34/1,8	1050	1,34/1,8	1050	0,85	0,225	200	250	F = 1000	0,0265	125	T75.26/112
T 1189 N	1200 ... 1800	2800	2530	22,50	2,05/5,4	1190	2,05/5,4	1190	0,90	0,19	200	240	F = 1000	0,023	125	T75.26/112
T 1509 N	1200 ... 1800	3500	5611	33,50 <sup>1)</sup>	2,10/7,0	1500	2,10/7,0	1500	0,90	0,15	200	240	F = 1000	0,0184	125	T75.26K/113
T 1509 N	1200 ... 1800	3500	5611	33,50 <sup>1)</sup>	2,10/7,0	1500	2,10/7,0	1500	0,90	0,15	200	240	F = 1000	0,0184	125	T75.26/112
T 1986 N	1200 ... 1800	4200	6480	36,00	2,05/8,0	1990	2,05/8,0	1990	0,90	0,12	200	250	F = 1000	0,0133	125	T100.35/112
T 1986 N	1200 ... 1800	4200	6480	36,00	2,05/8,0	1990	2,05/8,0	1990	0,90	0,12	200	250	F = 1000	0,0133	125	T100.35/112
T 1989 N	1200 ... 1800	4200	6480	36,00	2,05/8,0	1990	2,05/8,0	1990	0,90	0,12	200	250	F = 1000	0,0133	125	T100.26/112
T 3159 N	1200 ... 1800	7000	16245	57,00 <sup>2)</sup>	1,37/6,0	3160	1,37/6,0	3160	0,85	0,082	200	250	F = 1000	0,0085	125	T110.26/113

\* Highest voltage on request

<sup>1)</sup> Case non-rupture current 32 kA (sinusoidal half wave 50 Hz)

<sup>2)</sup> Case non-rupture current 38 kA

# Phase Control Thyristors

up to 3000 V



Type	$V_{BRM}$ $V_{DRM} = V_{RSM}$ $+100V$	$A \cdot s \cdot 10^3$	$I_{TRMSM}$ A	$I_{TSM}$ kA	$I_{TSM}$ kA	$V_T/I_T$ V/kA	$I_{TAVM}$ A	$V_{T(T)}$ V	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	$r_T$ m $\Omega$	(dV/dt) <sub>cr</sub> A/ $\mu$ s	$t_q$ $\mu$ s	(dV/dt) <sub>cr</sub> V/ $\mu$ s	$R_{thJC}$ °C/W	$T_{vj\ max}$ °C	Outline / page
T 271 N	2000 ... 2500	650	245	7,00	2,35/1,2	270	1,07	0,870	60	300	F = 1000	0,091	T5W41/111	125			
T 308 N	2000 ... 2600*	550	101	4,50	2,88/1,1	308	1,10	1,600	60	350	F = 1000	0,056	T50,14/112	125			
T 458 N	2000 ... 2600	1000	405	9,00	2,75/2,0	459	1,00	0,840	120	300	F = 1000	0,0455	T60,14/112	125			
T 459 N													T57,26/112				
T 639 N	1800 ... 2200	1250	562	10,60	1,88/1,8	640	0,85	0,510	120	400	F = 1000	0,0377	T57,26/112	125			
T 658 N	2200 ... 2600	1500	660	11,50	2,53/2,85	659	1,00	0,500	150	300	F = 1000	0,033	T60,14/112	125			
T 659 N	2200 ... 2600	1500	660	11,50	2,53/2,85	659	1,00	0,500	150	300	F = 1000	0,033	T57,26/112	125			
T 699 N	1800 ... 2200	1500	744	12,20	2,32/2,85	699	0,95	0,450	200	300	F = 1000	0,032	T57,26/112	125			
T 708 N	1800 ... 2200	1500	744	12,20	2,32/2,85	699	0,95	0,450	200	300	F = 1000	0,032	T60,14/112	125			
T 709 N	2000 ... 2600	1500	845	13,00	2,84/3,0	700	1,05	0,530	50	300	F = 1000	0,029	T75,26/112	125			
T 829 N	2000 ... 2600	1800	1201	15,50	1,78/1,8	829	0,95	0,425	50	350	F = 1000	0,0265	T75,26/112	125			
T 1039 N	1800 ... 2200	2200	1711	18,50	1,53/2,0	1039	0,90	0,300	200	300	F = 1000	0,0231	T75,26/112	125			
T 1218 N	2000 ... 2800	2625	2531	22,50	1,52/1,0	1220	1,05	0,330	150	350	F = 1000	0,016	T75,14/112	125			
T 1219 N	2000 ... 2800	2625	2645	22,50	1,38/1,0	1220	1,00	0,275	150	350	F = 1000	0,0184	T75,26/112	125			
T 1329 N	1800 ... 2200	2600	2645	23,00	1,13/1,0	1329	0,90	0,234	200	300	F = 1000	0,0184	T75,26/112	125			
T 1589 N	2000 ... 2800*	3200	3920	28,00	2,45/5,0	1589	1,10	0,237	150	400	F = 1000	0,0124	T100,26/113	125			
T 1866 N	1800 ... 2200	4100	6125	35,00	2,20/8,0	1869	0,90	0,155	200	300	F = 1000	0,0133	T100,35/113	125			
T 1869 N	1800 ... 2200	4100	6125	35,00	2,20/8,0	1869	0,90	0,155	200	300	F = 1000	0,0133	T100,26/113	125			
T 2156 N	2200 ... 2800	4600	8000	40,00**	2,65/8,8	2159	1,05	0,154	150	400	F = 1000	0,0099	T110,35/113	125			
T 2159 N	2200 ... 2800	4600	8000	40,00**	2,65/8,8	2159	1,05	0,154	150	400	F = 1000	0,0099	T110,26/113	125			
T 2160 N	2200 ... 2800	4600	8000	40,00	2,65/8,8	2159	1,05	0,154	150	400	F = 1000	0,0099	T120,26K/114	125			
T 2476 N	2200 ... 2800	5100	9460	43,50**	1,43/3,0	2480	0,95	0,154	200	400	F = 1000	0,0085	T110,35/113	125			
T 2479 N	2200 ... 2800	5100	9460	43,50**	1,43/3,0	2480	0,95	0,154	200	400	F = 1000	0,0085	T110,26/113	125			
T 2480 N	2200 ... 2800	5100	9460	43,50	1,43/3,0	2480	0,95	0,154	200	400	F = 1000	0,0085	T120,26K/114	125			
T 2709 N	1600 ... 2200	5800	12500	50,00**	2,35/11,0	2709	0,90	0,125	200	300	F = 1000	0,0085	T110,26/113	125			
T 2710 N	1600 ... 2200	5800	12500	50,00	2,35/11,0	2709	0,90	0,125	200	300	F = 1000	0,0085	T120,26K/114	125			
T 4301 N	2200 ... 2900	9420	41400	91,00	1,20/4,0	4300	0,77	0,107	300	300	F = 1000	0,0054	T150,35K/114	125			
T 4771 N	2200 ... 2900	10110	41400	91,00	1,20/4,0	4640	0,77	0,107	300	300	F = 1000	0,0048	T150,26K/114	125			

■ Not for new design

\* Highest voltage on request

\*\* Case non-rupture current 38 kA (sinusoidal half wave 50 Hz)

# Phase Control Thyristors

IGBT

SCR/Diode Modules

Presspacks

Stacks

Outlines

Accessories

Explanations

up to 4500 V



Type	$V_{DRM}$ V	$V_{DSM} = V_{DRM}$ $V_{RSM} = V_{DRM} + 100$ V	$I_{TRSM}$ A	$I_{TSM}$ kA	$I_{TSM}$ kA	$f_{Tdt}$ A $\cdot$ s · 10 <sup>3</sup>	$T_{vj\ max}$ 10 ms	$T_{vj\ max}$ 10 ms	$V_{T/I}$ V/kA	$I_{TVM}$ A	$V_{(TIO)}$ V	$T_{vj} = T_{vj\ max}$ ms $\Omega$	$r_T$ m $\Omega$	$(di/dt)_{cr}$ A/ $\mu$ s	DIN IEC 747 - 6	$t_q$ $\mu$ s	typ.	$(dv/dt)_{cr}$ V/ $\mu$ s	DIN IEC 747 - 6	$R_{thJC}$ °C/W	180 ° el sin	$T_{vj\ max}$ °C	Outline / page
T 379 N	3600	4200	800	205	6,4	205	205	205	3,26/1,2	422	1,20	1,20	1,60	100	100	500	F = 1000	0,033	F = 1000	0,033	125	T57.26/112	125
T 380 N	3200	3800	750	211	6,5	211	211	211	2,80/1,2	380	1,20	1,20	1,20	100	350	F = 1000	0,045	F = 1000	0,045	125	T57.26K/113	125	
T 729 N	3600	4200	1840	1250	15,8	1250	1250	1250	3,40/3,5	730	1,20	0,57	400	400	400	F = 1000	0,0215	F = 1000	0,0215	120	T75.26/112	120	
T 730 N	3600	4200	1840	1250	15,8	1250	1250	1250	3,40/3,5	730	1,20	0,57	400	400	400	F = 1000	0,0215	F = 1000	0,0215	120	T75.26K/113	120	
T 731 N	3600	4400	2010	1280	16	1280	1280	1280	1,86/1,2	910	1,08	0,65	500	500	500	H = 2000	0,0185	H = 2000	0,0185	125	T76.26K/113	125	
T 869 N	3000	3600	2000	1445	17	1445	1445	1445	3,18/3,8	860	1,08	0,50	400	400	80	F = 1000	0,021	F = 1000	0,021	125	T75.26/112	125	
T 901 N	2800	3600	2050	1445	17	1445	1445	1445	1,75/1,2	950	1,16	0,494	300	300	300	F = 1000	0,0185	F = 1000	0,0185	125	T76.26K/113	125	
T 929 N	3000	3600	2200	1530	17,5	1530	1530	1530	2,70/3,6	930	1,00	0,43	80	80	500	F = 1000	0,0215	F = 1000	0,0215	125	T75.26/112	125	
T 1401 N	3600	4200	3450	6480	36	6480	6480	6480	1,95/2,0	1600	1,29	0,33	350	350	350	H = 2000	0,0097	H = 2000	0,0097	125	T120.35K/114	125	
T 1971 N	3600	4200	3700	6480	36	6480	6480	6480	1,95/2,0	1730	1,29	0,33	350	300	350	H = 2000	0,0086	H = 2000	0,0086	125	T120.26K/114	125	
T 1601 N	2800	3600	4160	8400	41	8400	8400	8400	1,50/2,0	1920	1,00	0,25	300	300	300	F = 1000	0,0097	F = 1000	0,0097	125	T120.35K/114	125	
T 1929 N	3000	3800	4200	6850	37	6850	6850	6850	2,90/8,0	1930	1,08	0,20	150	150	450	F = 1000	0,0099	F = 1000	0,0099	125	T110.26/113	125	
T 2001 N	2800	3600	4460	8400	41	8400	8400	8400	1,50/2,0	2060	1,00	0,25	300	300	300	F = 1000	0,0087	F = 1000	0,0087	125	T120.26K/114	125	
T 2401 N	3100	3600	8350	37850	87	37850	37850	37850	1,40/4,0	3800	0,82	0,145	300	300	300	F = 1000	0,0054	F = 1000	0,0054	125	T150.35K/114	125	
T 3801 N	3100	3600	8950	37850	87	37850	37850	37850	1,40/4,0	4100	0,82	0,145	300	300	300	F = 1000	0,0048	F = 1000	0,0048	125	T150.26K/114	125	
T 3101 N	4000	4400	6830	34000	83	34000	34000	34000	1,75/4,0	3160	1,01	0,185	300	300	400	H = 2000	0,0054	H = 2000	0,0054	125	T150.35K/114	125	

up to 5500 V



Type	$V_{DRM}$ V	$V_{DSM} = V_{DRM}$ $V_{RSM} = V_{DRM} + 100$ V	$I_{TRSM}$ A	$I_{TSM}$ kA	$I_{TSM}$ kA	$f_{Tdt}$ A $\cdot$ s · 10 <sup>3</sup>	$T_{vj\ max}$ 10 ms	$T_{vj\ max}$ 10 ms	$V_{T/I}$ V/kA	$I_{TVM}$ A	$V_{(TIO)}$ V	$T_{vj} = T_{vj\ max}$ ms $\Omega$	$r_T$ m $\Omega$	$(di/dt)_{cr}$ A/ $\mu$ s	DIN IEC 747 - 6	$t_q$ $\mu$ s	typ.	$(dv/dt)_{cr}$ V/ $\mu$ s	DIN IEC 747 - 6	$R_{thJC}$ °C/W	180 ° el sin	$T_{vj\ max}$ °C	Outline / page
T 1451 N	4800	5200	3610	9250	43	9250	9250	9250	1,70/2,0	1690	0,92	0,37	300	300	450	H = 2000	0,0097	H = 2000	0,0097	125	T120.35K/114	125	
T 1551 N	4800	5200	3920	9250	43	9250	9250	9250	1,70/2,0	1830	0,92	0,37	300	300	450	H = 2000	0,0086	H = 2000	0,0086	125	T120.26K/114	125	
T 2161 N	4800	5200	4630	14600	54	14600	14600	14600	1,85/3,0	2170	0,81	0,36	300	300	450	H = 2000	0,0075	H = 2000	0,0075	125	T120.35K/114	125	
T 2351 N	4800	5200	5000	14600	54	14600	14600	14600	1,85/3,0	2360	0,81	0,36	300	300	450	H = 2000	0,0065	H = 2000	0,0065	125	T120.26K/114	125	
T 2401 N	4800	5200	5970	22000	67	22000	22000	22000	2,10/4,0	2750	1,090	0,25	300	300	350	H = 2000	0,0054	H = 2000	0,0054	125	T150.35K/114	125	
T 2851 N	4800	5200	6230	31000	79	31000	31000	31000	1,70/4,0	3000	0,765	0,235	300	300	600	H = 2000	0,0054	H = 2000	0,0054	125	T150.35K/114	125	
T 3441 N	4800	5200	6600	31000	79	31000	31000	31000	1,70/4,0	3200	0,765	0,235	300	300	600	H = 2000	0,0048	H = 2000	0,0048	125	T150.26K/114	125	
T 4021 N	4800	5350	8480	50000	100	50000	50000	50000	1,80/6,0	3920	0,92	0,142	300	300	550	H = 2000	0,00445	H = 2000	0,00445	125	T172.35K/112	125	

# Phase Control Thyristors

up to 10000 V

Type	$V_{\text{RSM}} = V_{\text{DRM}}$ $V_{\text{RSM}} = V_{\text{DRM}} + 100 \text{ V}$	$I_{\text{TRMSM}}$ A	$I_{\text{TSM}}$ kA	$V_{\text{T}}/I_{\text{T}}$ V/kA	$I_{\text{TAVM}}$ A	$V_{\text{T(T)}}$ V	$r_{\text{T}}$ m $\Omega$	$(dI/dt)_{\text{cr}}$ A/ $\mu$ s	$t_{\text{r}}$ $\mu$ s	$(dv/dt)_{\text{cr}}$ V/ $\mu$ s	$R_{\text{thJC}}$ °C/W	$T_{\text{vj max}}$ °C	Outline / page
■ T 201 N	6000 ... 7000	510	88,2	4,2	3,40/0,5	1,29	4,18	300	600	H = 2000	0,0430	125	T58.26K/113
◆ T 281 N	6000 ... 6500	600	115,0	4,8	2,75/0,5	1,35	2,80	150	1000	F = 1000	0,0430	125	T58.26K/113
■ T 501 N	6000 ... 7000	1260	845,0	13,0	2,65/1,0	1,30	1,35	300	600	H = 2000	0,0185	125	T76.26K/113
■ T 551 N	6000 ... 7000	1260	845,0	13,0	2,65/1,0	1,30	1,35	300	600	H = 2000	0,0205	125	T76.35K/113
◆ T 571 N	6000 ... 6500	1150	442,0	9,4	2,75/1,0	1,35	1,40	150	1000	F = 1000	0,0230	125	T76.26K/113
T 1081 N	6000 ... 7000	2830	578,0	34,0	2,70/2,0	1,18	0,759	300	600	H = 2000	0,0086	125	T120.26K/114
T 1201 N	6000 ... 7000	2600	578,0	34,0	2,70/2,0	1,18	0,759	300	600	H = 2000	0,0097	125	T120.35K/114
T 1651 N	6000 ... 7000	3610	1150,0	48,0	2,65/3,0	1,685	0,49	300	600	H = 2000	0,0075	125	T120.35K/114
T 1851 N	6000 ... 7000	3940	1150,0	48,0	2,65/3,0	1,850	0,49	300	600	H = 2000	0,0065	125	T120.26K/114
T 1901 N	7000 ... 8000	4520	2110,0	65,0	3,00/4,0	2130	0,44	300	550	H = 2000	0,0054	125	T150.35K/114
T 2251 N	7000 ... 8000	4840	2110,0	65,0	3,00/4,0	2280	0,44	300	550	H = 2000	0,0048	125	T150.26K/114
T 2871 N	7500 ... 8000	6060	4050,0	90,0	2,95/6,0	2740	1,425	300	550	H = 2000	0,00445	125	T172.35K/114

# Light Triggered Thyristors

Type	$V_{\text{BO}}$ V	$V_{\text{RSM}}$ V	$I_{\text{TRMSM}}$ A	$I_{\text{TSM}}$ kA	$V_{\text{T}}/I_{\text{T}}$ V/kA	$I_{\text{TAVM}}$ A	$V_{\text{T(T)}}$ V	$r_{\text{T}}$ m $\Omega$	$(dI/dt)_{\text{cr}}$ A/ $\mu$ s	$t_{\text{r}}$ $\mu$ s	$(dv/dt)_{\text{cr}}$ V/ $\mu$ s	$R_{\text{thJC}}$ °C/W	$T_{\text{vj max}}$ °C	Outline / page
Light Triggered Thyristors														
■ T 553 N	6500	7000	1200	684,0	11,7	2,65/1,0	1,30	1,350	300	600	H = 2000	0,0200	120	T76.35L/115
T 1503 N	7500	7500 ... 8000	3900	15125,0	55,0	3,00/4,0	1,24	0,440	300	550	H = 2000	0,0063	120	T150.40L/115
T 2563 N	7500	7500 ... 8000	5600	40500,0	90,0	2,95/5,0	1,28	0,278	300	550	H = 2000	0,0048	120	T172.40L/115
T 4003 N	5200	5200	5600	50000,0	100,0	1,80/5,0	0,92	0,142	300	500	H = 2000	0,0048	120	T172.40L/115

◆ Not for new design  
◆ New type

## Fast Thyristors

up to 600 V		Type	$V_{DRM}, V_{HRM}$ $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{HRM} + 50\text{ V}$	$I_{TRMSM}$ A	$I_{TSM}$ kA	10 ms, $T_{vj\text{ max}}$	$V_T/I_T$ V/kA	$T_{vj\text{ max}}$	$V_{(TO)}$ V	$r_T = T_{vj\text{ max}}$ m $\Omega$	$(di/dt)_{cr}$ A/ $\mu$ s	$t_q$ $\mu$ s	typ.	$(dv/dt)_{cr}$ V/ $\mu$ s	$V_{GT}$ V	$T_{vj} = 25^\circ\text{C}$	$I_{GT}$ mA	$R_{thJC}$ $^\circ\text{C/W}$	180° el sin	$T_{vj\text{ max}}$ $^\circ\text{C}$	Outline / page
T 178 F04 TMC	400	300	1,9	1,85/0,5	1,02	1,55	300	M $\leq$ 50	C = 500	2	200	250	0,033	140	T50.14/112						
T 1078 F04 TDC	400	2000	14,5	1,81/3,5	1,02	200	D $\leq$ 15	C = 500	2	250	0,033	140	T50.14/112								

up to 1400 V		Type	$V_{DRM}, V_{HRM}$ $V_{DSM} = V_{DRM}$ $V_{RSM} = V_{HRM} + 50\text{ V}$	$I_{TRMSM}$ A	$I_{TSM}$ kA	10 ms, $T_{vj\text{ max}}$	$V_T/I_T$ V/kA	$T_{vj\text{ max}}$	$V_{(TO)}$ V	$r_T = T_{vj\text{ max}}$ m $\Omega$	$(di/dt)_{cr}$ A/ $\mu$ s	$t_q$ $\mu$ s	typ.	$(dv/dt)_{cr}$ V/ $\mu$ s	DIN IEC 747 - 6	$V_{GT}$ V	$T_{vj} = 25^\circ\text{C}$	$I_{GT}$ mA	$R_{thJC}$ $^\circ\text{C/W}$	180° el sin	$T_{vj\text{ max}}$ $^\circ\text{C}$	Outline / page
T 408 F11 TFC	1100	750	6,4	2,20/1,4	1,2	200	F $\leq$ 25	C = 500	2,2	250	0,053	125	T50.14/112									
T 408 F12 TSB	1200	750	6,4	2,20/1,4	1,2	200	S $\leq$ 18	B = 50	2,2	250	0,053	125	T50.14/112									
T 408 F12 TSC	1200	750	6,4	2,20/1,4	1,2	200	S $\leq$ 18	C = 500	2,2	250	0,053	125	T50.14/112									
T 1052 S12 TDC	1200	2200	20,0	2,70/4,0	1,45	400	D $\leq$ 15	C = 500	2,2	300	0,018	125	T75.26K/113									

All Fast Thyristors not for new design

## Fast Thyristors

up to 2000 V

Type	$V_{DRM}$ , $V_{RSM} = V_{DRM}$ $V_{RSM} = V_{RHM} + 50 \text{ V}$	$I_{TRMSM}$	$I_{TSM}$	$K_A$	$T_{vj} = 10 \text{ ms}$ , $T_{vj}^{max}$	$V_{T(I)}$	$V_{T(I)}$	$r_T$	$T_{vj} = T_{vj}^{max}$	$r_T$	$(di/dt)_{cr}$	$A/\mu\text{s}$	$(di/dt)_{cr}$	$t_q$	$t_{vj}$	$V_{GT}$	$T_{vj} = 25^\circ\text{C}$	$I_{GT}$	$R_{thJC}$	$180^\circ \text{el sin}$	$T_{vj}^{max}$	Outline / page
T 930 S16 TFB	1600	2000	18	2,70/3,5	1,35	0,33	250	F ≤ 25	B = 50	2,2	250	0,021	250	125	T75.26K/113							
T 930 S16 TKC	1600	2000	18	2,70/3,5	1,35	0,33	250	K ≤ 40	C = 500	2,2	250	0,021	125	T75.26K/113								
T 930 S18 TKB	1800	2000	18	2,70/3,5	1,35	0,33	250	K ≤ 40	B = 50	2,2	250	0,021	125	T75.26K/113								
T 930 S18 TMC	1800	2000	18	2,70/3,5	1,35	0,33	250	M ≤ 50	C = 500	2,2	250	0,021	125	T75.26K/113								
T 930 S20 TMC	2000	2000	18	2,70/3,5	1,35	0,33	250	M ≤ 50	C = 500	2,2	250	0,021	125	T75.26K/113								

All Fast Thyristors not for new design

## Fast Asymmetric Thyristors


Type	$V_{DRM}$ , $V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	$V_{RSM} = V_{DRM}$	Outline / page
A 158 S12 TBF	1200	15 (50)	400	2,45	2,60/0,6	1,3/2,0	400	B ≤ 10	F = 1000	2,7	300	0,117	125	T141.14/112									
A 358 S10 TDF	1000	15 (50)	800	5,00	2,75/1,5	1,3/0,9	500	D ≤ 15	F = 1000	2,7	300	0,053	125	T50.14/112									
A 358 S12 TBF	1200	15 (50)	800	5,00	2,75/1,5	1,3/0,9	500	B ≤ 10	F = 1000	2,7	300	0,053	125	T50.14/112									
A 438 S12 TDF	1200	15 (50)	900	5,50	2,10/1,5	1,1/0,6	500	D ≤ 15	F = 1000	2,7	300	0,053	125	T50.14/112									

All Fast Asymmetric Thyristors not for new design

# Overview Rectifier in Disc Housings

V<sub>RMS</sub> – Concept

Case Ø	Pellet Ø	41 mm	50 mm	57/60 mm	75 mm	100 mm	120 mm	150 mm
9000 V	17 mm							
6800 V	21 mm							
5800 V	30 mm							
5000 V	30 mm							
4800 V	30 mm							
4600 V	30 mm							
4500 V	30 mm							
4400 V	30 mm							
4000 V	30 mm							
3600 V	30 mm							
3200 V	30 mm							
2800 V	30 mm							
2600 V	30 mm							
2400 V	30 mm							
2200 V	30 mm							
2000 V	30 mm							
1800 V	30 mm							
1600 V	30 mm							
1400 V	30 mm							
1200 V	30 mm							
600 V	30 mm							
400 V	30 mm							



High Power-Discs

Epoxy-Discs



# Rectifier Diodes

up to 800 V

Type	$V_{RHM}$ V	$V_{RSM} = V_{RHM} + 50$ V	$I_{RSM}$ A	$I_{FSM}$ kA	$I_{FSM} \cdot t$ A <sup>2</sup> · 10 <sup>3</sup>	$I_{FVM}/T_c$ A/°C	$V_{(T0)}$ V	$T_{vj} = T_{vjmax}$	$r_T$ mΩ	$R_{thJC}$ °C/W	$180^\circ$ ei sin	$T_{vjmax}$ °C	Outline / page
D 255 N	200 ... 800*	400 ... 800*	400	4,6	105,8	255/110	0,65	0,65	0,850	0,230		180	DSW27/116
D 255 K	200 ... 800*	200 ... 800*	400	4,0	80,0	255/75	0,65	0,65	0,850	0,345		180	DSW27/116
D 448 N	200 ... 800*	200 ... 800*	710	5,1	130,0	450/122	0,70	0,70	0,510	0,102		180	D41.14/117
D 758 N	400 ... 800*	400 ... 800*	1195	8,8	387,2	760/115	0,70	0,70	0,310	0,067		180	D41.14/117
D 2228 N	200 ... 600	200 ... 600	4000	28,5	4061,0	2230/110	0,70	0,70	0,0975	0,0254		180	D60.14/117
D 2898 N	400 ... 600	400 ... 600	6100	32,3	5200,0	2894/100	0,66	0,66	0,060	0,0254		180	D60.14/117
D 4457 N	400 ... 600	400 ... 600	7000	52,0	13500,0	4460/111	0,70	0,70	0,047	0,0128		180	D60.8/117
D 5807 N	400 ... 600	400 ... 600	9100	70,0	24500,0	5800/108	0,70	0,70	0,040	0,0098		180	D73.8/117
D 5809 N	400 ... 600	400 ... 600	9100	70,0	24500,0	5800/58	0,70	0,70	0,040	0,0166		180	D75.26/117
D 6247 N	400 ... 600	400 ... 600	9800	52,0	13500,0	6242/68	0,66	0,66	0,047	0,013		180	D60.8/117
D 8019 N	200 ... 600	200 ... 600	13300	95,0	45000,0	8020/56	0,70	0,70	0,027	0,0125		180	D100.26/118
D 8407 N	400 ... 600	400 ... 600	13200	70,0	24500,0	8408/64	0,66	0,66	0,036	0,0098		180	D73.8/117

up to 1800 V

Type	$V_{RHM}$ V	$V_{RSM} = V_{RHM} + 100$ V	$I_{RSM}$ A	$I_{FSM}$ kA	$I_{FSM} \cdot t$ A <sup>2</sup> · 10 <sup>3</sup>	$I_{FVM}/T_c$ A/°C	$V_{(T0)}$ V	$T_{vj} = T_{vjmax}$	$r_T$ mΩ	$R_{thJC}$ °C/W	$180^\circ$ ei sin	$T_{vjmax}$ °C	Outline / page
D 452 N	1200 ... 1800	1200 ... 1800	710	10,8	583,2	450/130	0,77	0,77	0,48	0,0855		180	DF54/116
D 452 K	1200 ... 1800	1200 ... 1800	710	10,8	583,2	450/130	0,77	0,77	0,48	0,0855		180	DF54/116
D 798 N	1200 ... 1800*	1200 ... 1800*	1650	11,8	696,0	800/130	0,81	0,81	0,28	0,0460		180	DS0.14/117
D 1049 N	1200 ... 1800	1200 ... 1800	2590	18,5	1710,0	1050/130	0,81	0,81	0,17	0,0380		180	DS7.26/117

■ Not for new design

\* Highest voltage on request

# Rectifier Diodes

up to 3000 V



Type	$V_{\text{RHM}} = V_{\text{RSM}} + 100 \text{ V}$	$I_{\text{FRMSM}}$ A	$I_{\text{FSM}}$ kA	$T_{\text{vj max}}$ 10 ms,	$I_{\text{FSM}}$ kA	$I_{\text{FSM}} \cdot 10^3$ A $\cdot$ s $\cdot$ 10 $^3$	$\int i^2 dt$ A $\cdot$ s $\cdot$ 10 $^3$	$I_{\text{FAM}}/T_c$ A $\cdot$ C	$180^\circ$ sinus	$V_{(T)}$ V	$T_{\text{vj}} = T_{\text{vj max}}$	$r_{\text{T}}$ m $\Omega$	$R_{\text{thJC}}$ $^\circ$ C/W	$180^\circ$ el sin	$T_{\text{vj max}}$ $^\circ$ C	Outline / page
D 121 N	1200 ... 2000	360	2,6		33,8	120/130	0,72	1,90	0,324	180						DSW27/116
D 121 K	1200 ... 2000	330	2,4		28,8	120/130	0,72	1,90	0,434	180						DSW27/116
D 251 N	1200 ... 2000	400	5,3		140,5	250/130	0,80	0,85	0,151	180						DSW27/116
D 251 K	1200 ... 2000	400	4,7		110,5	250/102	0,80	0,85	0,236	180						DFL36/116
D 400 N	1600 ... 2200	710	9,8		480,2	400/130	0,70	0,62	0,095	180						DFL36/116
D 400 K	1600 ... 2200	710	9,8		480,2	400/130	0,70	0,62	0,095	180						DSW41/116
D 428 N	1200 ... 2000	840	6,0		180,0	430/139	0,81	0,54	0,069	180						D41.14/117
D 428 N	1200 ... 2200	1435	10,25		525,0	660/130	0,70	0,50	0,050	180						D41.14K/118
D 748 N	2000 ... 2800	1260	9,0		405,0	750/100	0,83	0,52	0,045	160						D50.14/117
D 1029 N	1800 ... 2600	2040	14,5		1051,0	1030/100	0,82	0,28	0,038	160						D57.26/117
D 1030 N	1800 ... 2600	2040	14,5		1051,0	1030/100	0,82	0,28	0,038	160						D57.26K/118
D 1709 N	2000 ... 2400	2700	18,0		1620,0	1700/90	0,83	0,20	0,0245	160						D75.26/117
D 2200 N	2000 ... 2800	4900	35,0		6125,0	2200/100	0,83	0,145	0,017	160						D75.26K/118
D 2209 N	2000 ... 2800	4900	35,0		6125,0	2200/100	0,83	0,145	0,017	160						D75.26/117
D 2650 N	2000 ... 2400	4710	33,5		5611,0	2650/100	0,82	0,148	0,0169	180						D75.26K/118
D 2659 N	2000 ... 2400	4710	33,5		5611,0	2650/100	0,82	0,148	0,0169	180						D75.26/117
D 4201 N	1600 ... 2200	11200	73,5		27000,0	4830/100	0,668	0,081	0,0092	160						D120.35K/119
D 4709 N	2000 ... 2800	8400	60,0		18000,0	4700/100	0,83	0,07	0,008	160						D110.26/118

■ Not for new design

# Rectifier Diodes

up to 5000 V

Type	$V_{RSM} = V_{RHM} + 100\text{ V}$	$I_{RSM}$ KA	$I_{RMSM}$ A	$\int i^2 dt$ A <sup>2</sup> ·10 <sup>3</sup>	$V_{(TIO)}$ V	$T_{vj} = T_{vj\ max}$	$r_T$ mΩ	$R_{thJC}$ °C/W	180° el sin	$T_{vj\ max}$ °C	Outline / page
■ D 269 N	3200 ... 3600	4,0	550	80	270/100	10 ms	1,540	0,0980		150	D57.26/117
■ D 475 N	3200 ... 4000	10,9	745	594	475/100	10 ms	0,765	0,0850		160	DSW41.1/116
■ D 475 K	3200 ... 4000	10,9	745	594	475/100	10 ms	0,612	0,0850		160	DSW41.1/116
D 749 N	3600 ... 4800*	11,0	1540	605	750/100	10 ms	0,650	0,0390		160	D57.26/117
D 849 N	2800 ... 4000*	12,8	1790	819	850/100	10 ms	0,840	0,0380		160	D57.26/117
D 850 N	2800 ... 4000*	12,8	1790	819	850/100	10 ms	0,840	0,0380		160	D57.26/117
■ D 1069 N	3600 ... 4400	15,5	2200	1201	1070/100	10 ms	0,850	0,0270		160	D75.26/117
D 1809 N	3200 ... 4800	27,5	3850	3781	1800/100	10 ms	0,850	0,0169		160	D75.26/117
D 1800 N	3200 ... 4800	27,5	3850	3781	1800/100	10 ms	0,850	0,0169		160	D75.26K/118
D 3501 N	3200 ... 4200	56,0	8200	15680	3690/100	10 ms	0,734	0,0092		160	D120.35K/119
◆ D 6001 N	4500 ... 5000	110,0	13000	60500	6070/100	10 ms	0,800	0,0046		160	D150.26K/119

up to 10000 V

Type	$V_{RSM} = V_{RHM} + 100\text{ V}$	$I_{RSM}$ KA	$I_{RMSM}$ A	$\int i^2 dt$ A <sup>2</sup> ·10 <sup>3</sup>	$V_{(TIO)}$ V	$T_{vj} = T_{vj\ max}$	$r_T$ mΩ	$R_{thJC}$ °C/W	180° el sin	$T_{vj\ max}$ °C	Outline / page
D 711 N	5800 ... 6800	10,5	1670	550	790/100	10 ms	0,840	0,0315		160	D58.26K/118
D 1481 N	5800 ... 6800	24,5	3610	3000	1650/100	10 ms	0,750	0,0158		160	D76.26K/119
D 3001 N	5800 ... 6800	53,0	6340	14040	2900/100	10 ms	0,840	0,0092		160	D120.35K/119
D 3041 N	5800 ... 6800	53,0	6620	14040	2900/100	10 ms	0,840	0,00855		160	D120.26K/119
D 471 N	8000 ... 9000	10,0	1200	500	565/100	10 ms	1,040	0,0315		160	D58.26K/118
D 2601 N	8500 ... 9000	50,0	4820	12500	2240/100	10 ms	0,944	0,00855		160	D120.26K/119

■ Not for new design

◆ New type

\* Highest voltage on request

## GCT – Freewheeling Diodes

Type	$V_{(DRM)}$ V	$V_{(DIP)}$ kV	$T_c = 25$ typ.	$I_{(FSM)}$ kA	$I_{(FSM)}$ sin, 10 ms	$f_{TDT}$ A $\cdot$ s · 10 <sup>3</sup>	$V_{(F)/I_{(FMI)}}$ V/2,5 kA	$T_{vj} = T_{vj\ max}$ sin	$I_{(FMI)}$ A	$I_{(FMI)}$ di/dt = 1000 A/ $\mu$ s	$I_{(FMI)}$ di/dt = 2,5 kA	$I_{(FMI)}$ di/dt = 1000 A/ $\mu$ s	$R_{thJC}$ °C/W	DC	Outline / page
D 911 SH	4500	2,8	2,8	17,0	1445	6,0	1200**	2,8**	1200**	2,8**	0,0100	140	D100.26K/119		
D 1031 SH	4500	2,8	2,8	23,0	265	4,2	1500**	3,5**	1500**	3,5**	0,0100	140	D100.26K/119		
D 1121 SH	4500	2,8	2,8	17,5	1530	5,6	1200**	3,5**	1200**	3,5**	0,0075	140	D120.26K/119		
D 1331 SH	4500	2,8	2,8	28,0	3920	4,2	1500**	3,5**	1500**	3,5**	0,0075	140	D120.26K/119		
D 1961 SH	4500	2,8	2,8	40,0	8000	2,5	2250**	12,0**	2250**	12,0**	0,0075	140	D120.26K/119		
D 931 SH	6500	3,2	3,2	16,0	1280	5,6	1300**	3,5**	1300**	3,5**	0,0100	140	D100.26K/119		
D 1131 SH	6500	3,2	3,2	22,0	2400	5,6	1300**	3,5**	1300**	3,5**	0,0075	140	D120.26K/119		
D 1951 SH	6500	3,2	3,2	44,0	9680	4,0	1800**	5,0**	1800**	5,0**	0,0045	140	D150.26K/119		

\*) Estimate failure rate  $\lambda \sim 100$  fit

◆ New type


\*\*) Clamp circuit  $L = 0,25 \mu$ H

## GTO – Freewheeling Diodes

Type	$V_{(DRM)}$ V	$V_{(DIP)}$ kV	$T_c = 25$ typ.	$I_{(FSM)}$ kA	$I_{(FSM)}$ sin, 10 ms	$T_{vj\ max}$ sin, 10 ms	$f_{TDT}$ A $\cdot$ s · 10 <sup>3</sup>	$V_{(F)/I_{(FMI)}}$ V/2,5 kA	$T_{vj} = T_{vj\ max}$ sin	$I_{(FMI)}$ A	$I_{(FMI)}$ di/dt = 250 A/ $\mu$ s	$I_{(FMI)}$ di/dt = 250 A/ $\mu$ s	$I_{(FMI)}$ di/dt = 250 A/ $\mu$ s	$R_{thJC}$ °C/W	DC	Outline / page
D 1170 S	2000, 2500	1,25	1,25	24,0	2880	2,62/6,4	580	1,7	1,7	0,0184	120	D75.26K/118				
D 721 S	3500 ... 4500	2,0	18,0	1130	3,50/2,5	600	1,7	1,7	0,0180	125	D76.26K/119					
D 1461 S	3500 ... 4500	2,0	28,0	5120	2,50/2,5	840	2,8	2,8	0,0125	140	D100.26K/119					
D 1251 S	4500	2,5	18,0	1620	2,50/2,5	800	3,0	3,0	0,0100	140	D76.14K/119					
D 921 S	4500	2,5	28,0	5120	2,60/2,5	700	2,8	2,8	0,0125	140	D100.26K/119					
D 1381 S	4500	3,0	28,0	5120	2,60/2,5	700	2,8	2,8	0,0125	140	D100.26K/119					

\*) Estimate failure rate  $\lambda \sim 100$  fit\*\*) GTO-Snubber  $V_{(F)} = 0,5 V_{(DRM)}$ ,  $V_{(FMI)} = 0,8 V_{(DRM)}$

# GTO Snubber Diodes and general use



Type	$V_{(RSM)}$ V	$V_{(RC)}$ V	$I_{(FSM)}$ kA	$T_{vj} = T_{vj\ max}$ sin, 10 ms	$V_{(F)}$ / $I_{(F)}$ V/kA	$T_{vj} = T_{vj\ max}$ sin, 10 ms	$V_{FRM}$ typ. V	$R_{(th)JC}$ °C/W	DC	$T_{vj\ max}$ °C	Outline / page
D 170 S	2500	1500	3,70	2,30/0,8	0,180	140	DSW27.1/116	140			
D 170 U	2500	1500	3,15	2,15/0,65	0,250	140	DSW27.1/116	140			
D 228 S	2500	1500	3,20	2,12/0,5	0,075	125	D60.14/117	125			
D 56 S	4500	3000	1,35	4,50/0,32	0,245	125	DSW27.2/116	125			
D 56 U	4500	3000	1,20	4,15/0,28	0,325	125	DSW27.2/116	125			
D 291 S	3500 ... 4500	3200	4,50	4,15/1,2	0,040	125	D58.26K/118	125			
D 841 S	4500	3200	15,00	3,50/2,5	0,010	125	D76.14K/119	125			
snubberless:											
D 371 S	4500	3200	6,00	3,90/1,2	0,035	125	D58.26K/118	125			
D 801 S	4500	3200	14,00	3,70/2,5	0,010	125	D76.14K/119	125			
D 901 S	3500 ... 4500	2500	21,50	3,50/2,5	0,0125	70	D100.26K/119	125			

<sup>1)</sup> Maximum permissible link voltage, GTO snubber diode

## Fast Rectifier Diodes

up to 1000 V										
Type	$V_{RSM} = V_{RRM} + 100\text{ V}$	$I_{FRSM}$	$I_{FSM}$	$I_{FSM} \cdot 10^3$	$\int i^2 dt$	$I_{FAVM}/T_c$	$V_{(T0)}$	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	$R_{thjC}$
D 138 S	900 ... 1000	230	1,6	12,80	138/85	1,32	2,20	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 388 S	600 ... 1000	730	5,2	135,20	358/100	1,05	0,80	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 648 S	800 ... 1000	1400	10,1	510,05	648/100	1,05	0,43	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 649 S	800 ... 1000	1400	10,1	510,05	650/96	1,05	0,43	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin

<sup>1)</sup>  $I_{FM} = 225\text{ A}$ ,  $-di_t/dt = 100\text{ A}/\mu\text{s}$

up to 1400 V										
Type	$V_{RSM} = V_{RRM} + 100\text{ V}$	$I_{FRSM}$	$I_{FSM}$	$I_{FSM} \cdot 10^3$	$\int i^2 dt$	$I_{FAVM}/T_c$	$V_{(T0)}$	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	$R_{thjC}$
D 188 S	1000 ... 1400	290	1,9	18,05	185/100	1,00	1,80	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 211 S	1000 ... 1400	400	4,3	92,45	211/100	1,00	1,00	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 211 U	1000 ... 1400	400	3,9	76,05	150/100	1,00	1,00	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 238 S	1200	455	3,2	51,20	238/85	1,45	1,10	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 368 S	1000 ... 1400	730	5,2	135,20	368/100	1,00	0,80	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 658 S	1000 ... 1400	1400	10,1	510,05	658/100	1,00	0,45	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin
D 659 S	1000 ... 1400	1400	10,1	510,05	660/95	1,00	0,45	$T_{vj} = T_{vj\ max}$	$T_{vj} = T_{vj\ max}$	180 ° el sin

# Fast Rectifier Diodes

up to 2600 V

Type	$V_{FRM}$ V	$V_{RSM} = V_{FRM} + 100$ V	$I_{FRSM}$ A	$I_{FSM}$ kA	$t_{F2dt}$ $A^2 \cdot 10^3$	$I_{FAVM}/T_c$ A/°C	$V_{(T0)}$ V	$T_{vj} = T_{vj\ max}$ mΩ	$I_{RM}$ A	$R_{thjc}$ °C/W	$T_{vj\ max}$ °C	Outline / page
D 170 S	2500	2500	400	3,70	68,45	170/85	1,10	1,10	340 <sup>51)</sup>	0,190	140	DSW27.1/116
D 170 U	2500	2500	330	3,15	49,60	170/64	1,10	1,50	340 <sup>51)</sup>	0,260	140	DSW27.1/116
D 228 S	2200, 2500	2200, 2500	450	3,20	51,20	228/85	1,18	1,80	280	0,080	125	D41.14/117
D 348 S	1600 ... 2000	1600 ... 2000	645	4,60	105,80	348/100	1,00	0,90	160	0,080	150	D41.14/117
D 438 S	1600 ... 2000	1600 ... 2000	740	5,30	140,50	440/100	1,14	0,725	770 <sup>41)</sup>	0,059	150	D41.14/117
D 440 S	1600 ... 2000	2400 ... 2600	740	5,30	140,50	440/100	1,14	0,725	770 <sup>41)</sup>	0,059	150	D57.26K/118
D 509 S	2400 ... 2600	2400 ... 2600	1050	7,50	281,25	509/100	1,00	0,80	205	0,049	150	D57.26/117
D 675 S	2000, 2500	2000, 2500	1200	8,50	361,00	675/85	1,25	0,50	860 <sup>51)</sup>	0,039	140	D57.26K/118
D 689 S	2000 ... 2600	2000 ... 2600	1600	11,50	661,25	690/100	1,00	0,50	230	0,039	150	D57.26/117
D 690 S												D57.26K/118
D 1169 S	2000, 2500	2000, 2500	3360	24,00	2880,00	1170/85	1,16	0,21	580 <sup>51)</sup>	0,0194	125	D75.26/117
D 1170 S	2000, 2500	2000, 2500	3360	24,00	2880,00	1170/85	1,16	0,21	580 <sup>51)</sup>	0,0194	125	D75.26K/118
D 1408 S	2000, 2500	2000, 2500	3360	24,00	2880,00	1410/85	1,16	0,21	580 <sup>51)</sup>	0,015	125	D75.14/117

up to 6000 V

Type	$V_{FRM}$ V	$V_{RSM} = V_{FRM} + 100$ V	$I_{FRSM}$ A	$I_{FSM}$ kA	$t_{F2dt}$ $A^2 \cdot 10^3$	$I_{FAVM}/T_c$ A/°C	$V_{(T0)}$ V	$T_{vj} = T_{vj\ max}$ mΩ	$I_{RM}$ A	$R_{thjc}$ °C/W	$T_{vj\ max}$ °C	Outline / page
D 56 S	4000, 4500	4000, 4500	160	1,35	9,10	56/85	1,64	8,00	230 <sup>21)</sup>	0,26	125	DSW27.2/116
D 56 U	4000, 4500	4000, 4500	140	1,20	7,20	56/73	1,64	8,00	230 <sup>21)</sup>	0,34	125	DSW27.2/116

<sup>1)</sup>  $I_{FM} = 150$  A, -  $di/dt = 200$  A/μs  
<sup>2)</sup>  $I_{FM} = 500$  A, -  $di/dt = 200$  A/μs  
<sup>3)</sup>  $I_{FM} = 500$  A, -  $di/dt = 250$  A/μs

<sup>4)</sup>  $I_{FM} = 1600$  A, -  $di/dt = 600$  A/μs  
<sup>5)</sup>  $I_{FM} = 1000$  A, -  $di/dt = 250$  A/μs

## Avalanche Rectifier Diodes

Type	$V_{\text{RSM}} = V_{\text{FRM}} + 100 \text{ V}$	$I_{\text{FRMSM}}$ A	$I_{\text{FSM}}$ kA	$A_2 \cdot 10^3$ 10 ms, $T_{\text{vj max}}$	$\int i^2 dt$ $A^2 \cdot 10^3$	$I_{\text{FAVM}}/T_c$ A/°C	$180^\circ$ sinus	$V^{(T0)}$ V	$T_{\text{vj}} = T_{\text{vj max}}$	$T_{\text{r}}$ mΩ	$V_{\text{BR}}$ min.	$R_{\text{thJC}}$ °C/W	$180^\circ$ el sin	$T_{\text{vj max}}$ °C	Outline / page
D 126 A 45	4500	315	2,30	26,45	126/100	0,86	3,2	4800	0,257	160	DSW27.2/116				
D 126 B 45	4500	300	2,10	22,00	126/80	0,86	3,2	4800	0,337	160	DSW27.2/116				
DD 126 A 45 K-B9*	4500	220	2,30	26,45	128/100	0,86	3,2	4800	0,060	160	DP30.1/120				

\* Non isolated module

## Welding Diodes

up to 600 V

Type	$V_{\text{RSM}} = V_{\text{FRM}} + 50 \text{ V}$	$I_{\text{FRMSM}}$ A	$I_{\text{FSM}}$ kA	$A_2 \cdot 10^3$ 10 ms, $T_{\text{vj max}}$	$\int i^2 dt$ $A^2 \cdot 10^3$	$I_{\text{FAVM}}/T_c$ A/°C	$180^\circ$ sinus	$V^{(T0)}$ V	$T_{\text{vj}} = T_{\text{vj max}}$	$T_{\text{r}}$ mΩ	$R_{\text{thJC}}$ °C/W	$180^\circ$ el sin	$T_{\text{vj max}}$ °C	Outline / page
25 DN 06	600	1800	12,75	813	1145/155	0,70	0,174	180	0,0174	180	25DN06/118			
38 DN 06	600	6100	32,3	5200	3885/120	0,66	0,060	180	0,0124	180	38DN06/118			
46 DN 06	600	8000	52,0	13500	5100/118	0,70	0,047	180	0,00935	180	46DN06/118			
56 DN 06	600	10050	70,0	24500	6400/116	0,70	0,040	180	0,0062	180	56DN06/118			
65 DN 06	600	13300	95,0	45000	8470/98	0,70	0,027	180	0,0047	180	65DN06/118			

## Insulated Cells

Type	$V_{\text{M}}$ V	$V_{\text{RMS}}/V_{\text{DC}}$ V	CTI - Value	Iso-Class	$T_c^{(\text{max})}$ °C	$R_{\text{thCK}}$ °C/W	$R_{\text{thC}}^{(\text{typ})}$ °C/W	at clamp. force	$F_{\text{max}}$ kN	Weight g	Outline / page
ISO 57/26	6400	2520	250	III a	150	0,010	0,0880	at 12kN	30	260	ISO 57/26
ISO 72/8	2250	700	250	III a	150	0,005	0,0280	at 20kN	45	130	ISO 72/8
ISO 75/14	3500	1250	250	III a	150	0,005	0,0435	at 20kN	45	245	ISO 75/14
ISO 75/26	5900	2250	250	III a	150	0,005	0,0480	at 20kN	45	460	ISO 75/26

Insulating material: AlN






## Examples of implemented ModSTACK™

Up to 400 Vac	Irms [A]	at fsw [Hz]	Remarks	Size
B6I 400/600-460-G	460	3000	inverter	MS2/80
B6I 400/600-480-W	480	3000	inverter	MS2/80

Up to 500 Vac	Irms [A]	at fsw [Hz]	Remarks	Size
B6I 500/800-220-F	220	2500	inverter	MS1/79
B6I 500/800-220-G	220	2500	inverter	MS1/79
B6I 500/800-250-W	250	2500	inverter	MS1/79
ZB6I 500/800-330-G	2 x 330	3000	2 inverter parallel	MS3/81
ZB6I 500/800-350-W	2 x 350	3000	2 inverter parallel	MS3/81
ZB6I 500/800-400-G	2 x 400	3000	2 inverter parallel	MS3/81
ZB6I 500/800-450-W	2 x 450	3000	2 inverter parallel	MS3/81
ZB6I 500/800-600-W	2 x 600	3000	2 inverter parallel	MS4/82

Other topologies and ratings possible. Please refer to page 67.

### Mod STACK™ Type Designation System:

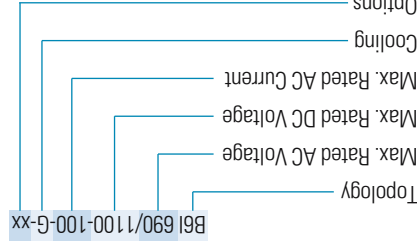

**Descriptors**  
 G = forced air cooling  
 W = water cooling  
 F = fan included


























**Options**  
 M = Master  
 S = slave, single use  
 O = fiber optic interface  
 X = voltage signal interface











**General Information:**  
 Nominal AC current is rated for a certain switching frequency and at  $T_{amb} = 45^\circ\text{C}$  for air cooled IGBT stacks and  $40^\circ\text{C}$  for water cooled stacks. Starting from nominal current a maximum current of  $1,2 \cdot I_{nom}$  is possible. Higher switching frequencies result in a derating of the nominal output current.

Other topologies and ratings possible. Please refer to page 67.

Up to 690 Vac	Irms [A]	at fsw [Hz]	Remarks	Size
B6I 690/1100-100-G	100	2500	inverter	MS1/79
B6I 690/1100-150-G	150	2500	inverter	MS1/79
B6I 690/1100-250-G	250	2250	inverter	MS2/80
B6I 690/1100-375-G	375	1250	inverter	MS2/80
B6I 690/1100-460-W	460	2500	inverter	MS2/80
B6I+B6I 690/1100-300-G	300	2250	AC/AC converter	MS3/81
B6I+B6I 690/1100-330-G	330	2250	AC/AC converter	MS3/81
ZB6I 690/1100-330-G	2 x 330	2250	2 inverter parallel	MS3/81
ZB6I 690/1100-400-W	2 x 400	2500	2 inverter parallel	MS3/81
B6I+B6I 690/1100-650-G	650	2250	AC/AC converter	MS4/82
ZB6I 690/1100-600-G	2 x 600	2250	2 inverter parallel	MS4/82

for air cooling  
 for water cooling

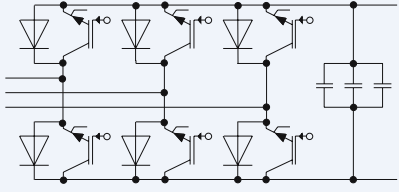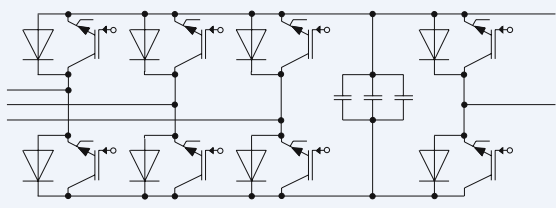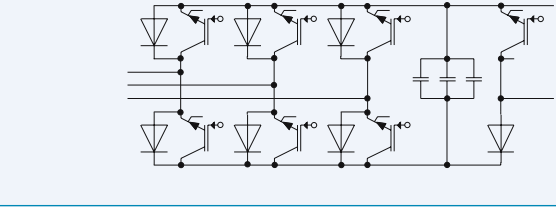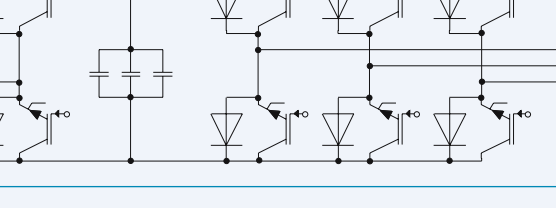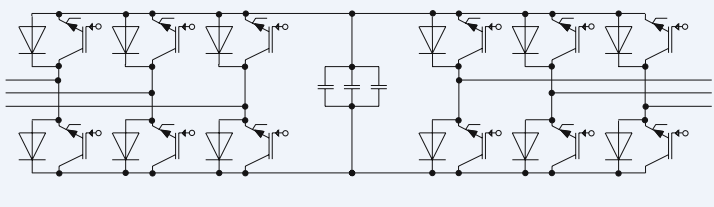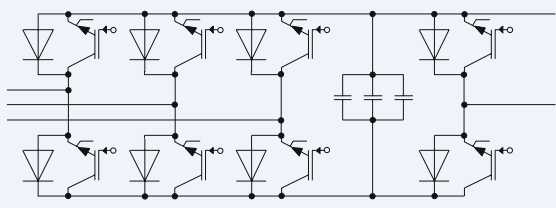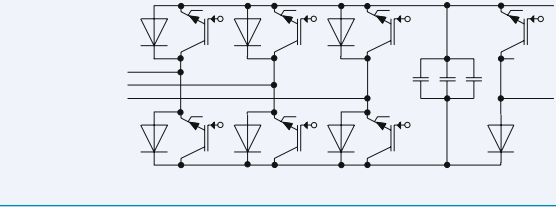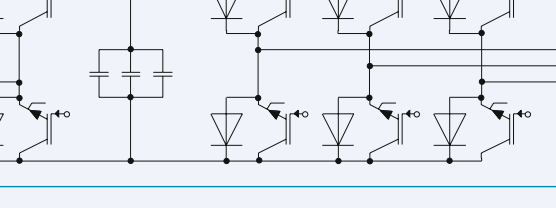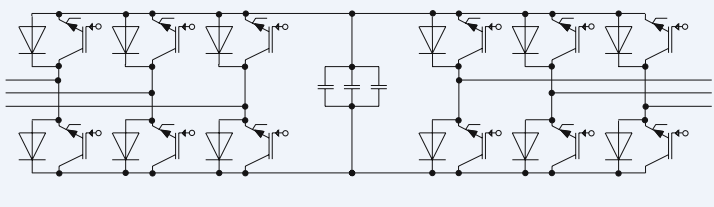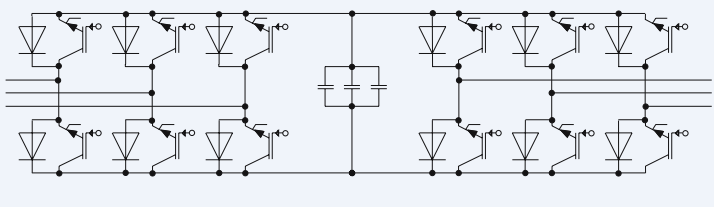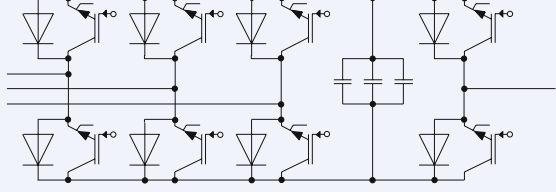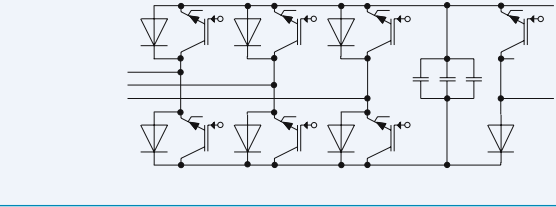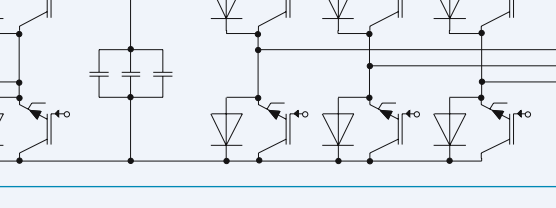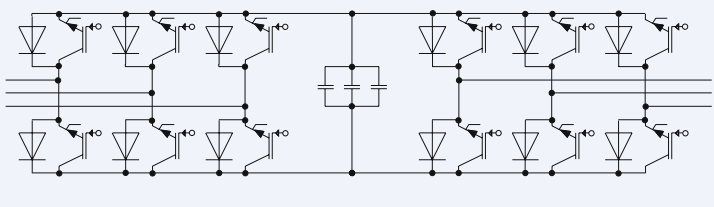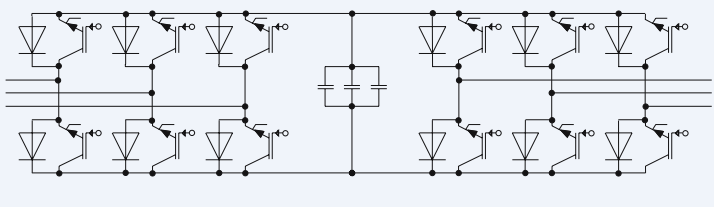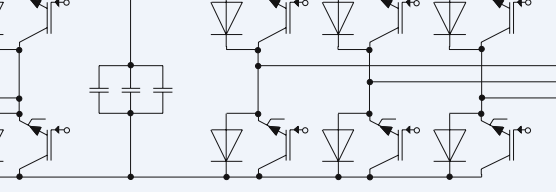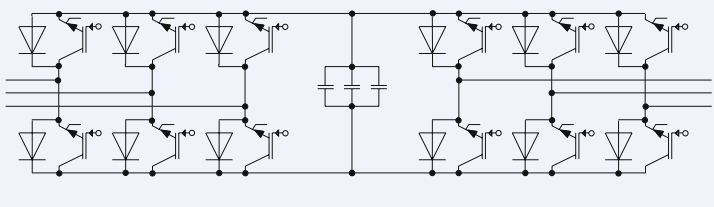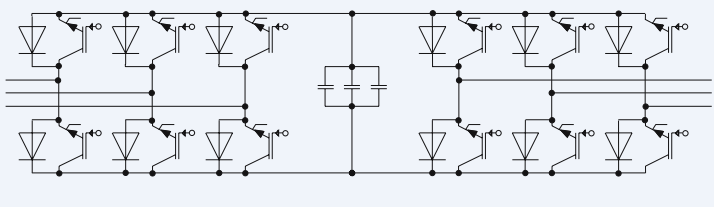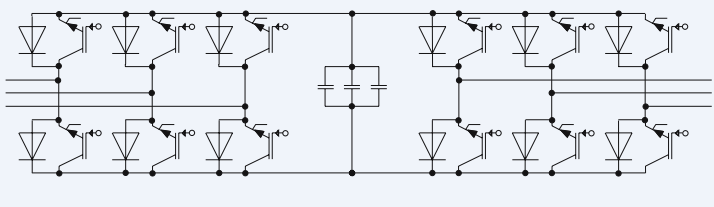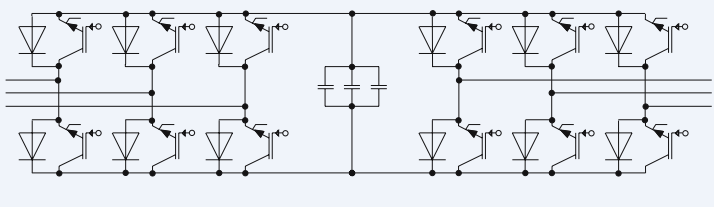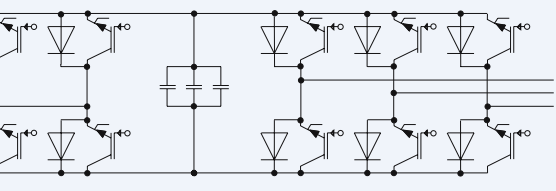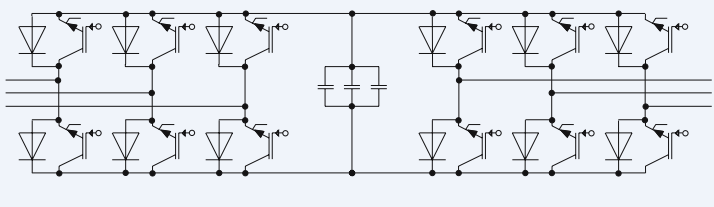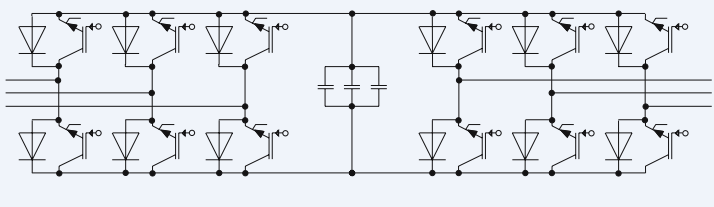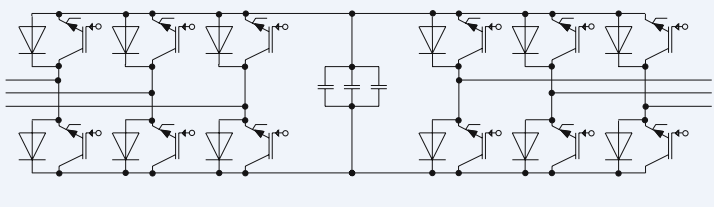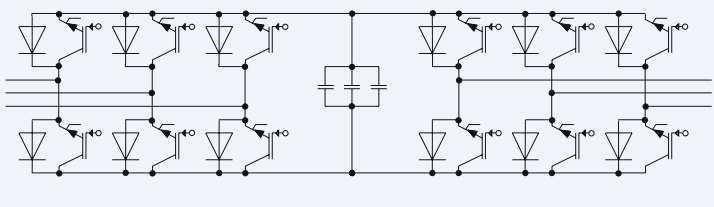Acronym	IGBT Stack Topology				
B6I					
1/2B21+B6I					
1/2B21HK					
B2IH					
B2I					

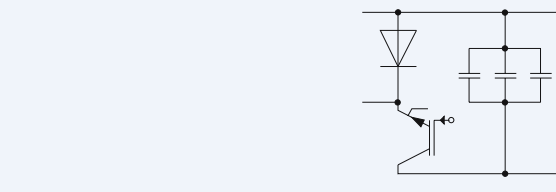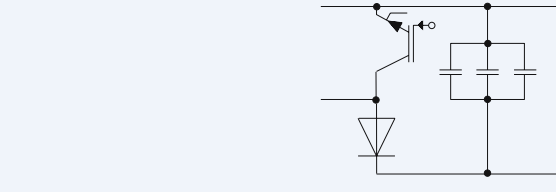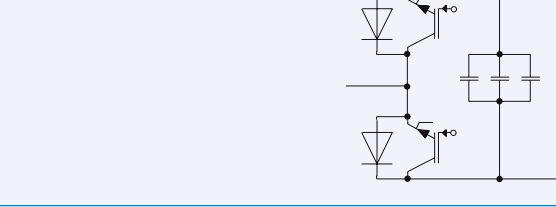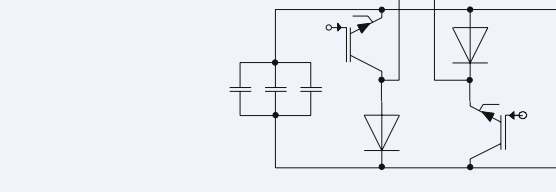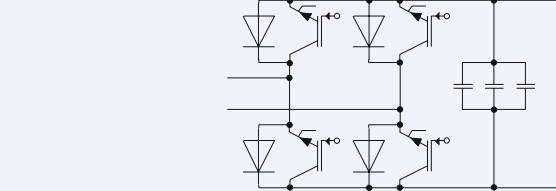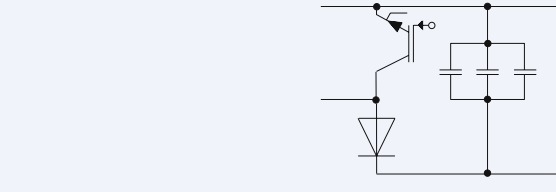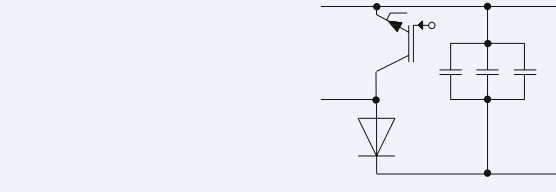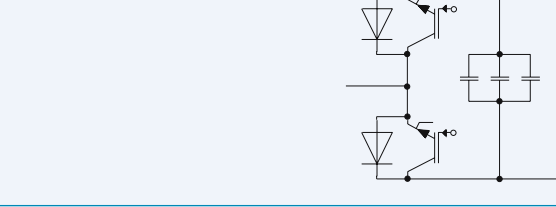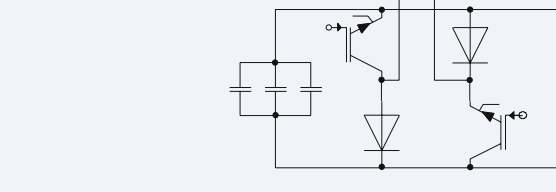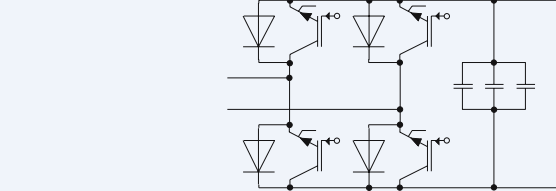Acronym	IGBT Stack Topology				
1/2B21HA					
1/2B21					

With 600V IGBT Modules	Type	Implemented IGBT Module	Outline	Outline / page
IGBT <sup>2</sup> Low Loss	ZPS0600R12DLC-2G	BSM300GB60DLC	C2 air cooling	PS_C2G/83
	ZPS0900R12DLC-3G	BSM300GB60DLC	C3 air cooling	PS_C3G/85
	ZPS1200R12DLC-4G	BSM300GB60DLC	C4 air cooling	PS_C4G/87
	4PS0300R12DLC-3G	BSM300GB60DLC	C3 air cooling	PS_C3G/85
	6PS0300R12DLC-3G	BSM300GB60DLC	C3 air cooling	PS_C3G/85
IGBT <sup>3</sup>	ZPS0400R12DLC-2G	FF200R06KE3	C2 air cooling	PS_C2G/83
	ZPS0600R12DLC-2G	FF400R06KE3	C2 air cooling	PS_C2G/83
	ZPS0600R12DLC-3G	FF200R06KE3	C3 air cooling	PS_C3G/85
	ZPS0900R12DLC-3G	FF300R06KE3	C3 air cooling	PS_C3G/85
	ZPS1200R12DLC-3G	FF400R06KE3	C3 air cooling	PS_C3G/85
	ZPS0800R12DLC-4G	FF200R06KE3	C4 air cooling	PS_C4G/87
	ZPS1600R12DLC-4G	FF200R06KE3	C4 air cooling	PS_C4G/87
	ZPS0450R12DLC-3G	BSM150GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0300R12DLC-3G	BSM100GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0400R12DLC-2G	BSM200GB120DLC	C2 air cooling	PS_C2G/83
	ZPS0600R12DLC-2G	BSM300GB120DLC	C2 air cooling	PS_C2G/83
	ZPS0600R12DLC-3G	BSM150GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0450R12DLC-3G	BSM100GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0600R12DLC-3G	BSM200GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0900R12DLC-3G	BSM300GB120DLC	C3 air cooling	PS_C3G/85
	ZPS0400R12DLC-4G	BSM100GB120DLC	C4 air cooling	PS_C4G/87
	ZPS0800R12DLC-4G	BSM200GB120DLC	C4 air cooling	PS_C4G/87
	ZPS0400R12DLC-4G	BSM150GB120DLC	C4 air cooling	PS_C4G/87
	ZPS0600R12DLC-4G	BSM150GB120DLC	C4 air cooling	PS_C4G/87
	ZPS0400R12DLC-4G	BSM100GB120DLC	C4 air cooling	PS_C4G/87
	ZPS0600R12DLC-4G	BSM100GB120DLC	C4 air cooling	PS_C4G/87
IGBT <sup>2</sup> Fast	ZPS0200R12KS4-2G	FF100R12KS4	C2 air cooling	PS_C2G/83
	ZPS0200R12KS4-2G	FF150R12KS4	C2 air cooling	PS_C2G/83
	ZPS0300R12KS4-2G	FF150R12KS4	C2 air cooling	PS_C2G/83
	ZPS0400R12KS4-2G	FF200R12KS4	C2 air cooling	PS_C2G/83
	ZPS0600R12KS4-2G	FF300R12KS4	C2 air cooling	PS_C2G/83
	ZPS0800R12KS4-2G	FF400R12KS4	C2 air cooling	PS_C2G/83
	ZPS100R12KS4-3G	FF150R12KS4	C3 air cooling	PS_C3G/85
	ZPS0150R12KS4-3G	FF150R12KS4	C3 air cooling	PS_C3G/85
	ZPS0200R12KS4-3G	FF200R12KS4	C3 air cooling	PS_C3G/85
	ZPS0300R12KS4-3G	FF300R12KS4	C3 air cooling	PS_C3G/85
	ZPS0400R12KS4-3G	FF400R12KS4	C3 air cooling	PS_C3G/85
	ZPS050R12KS4-3G	FF100R12KS4	C3 air cooling	PS_C3G/85
	ZPS0100R12KS4-3G	FF100R12KS4	C3 air cooling	PS_C3G/85
	ZPS0300R12KS4-3G	FF300R12KS4	C3 air cooling	PS_C3G/85
	ZPS0900R12KS4-3G	FF300R12KS4	C3 air cooling	PS_C3G/85
	ZPS0400R12KS4-4G	FF150R12KS4	C4 air cooling	PS_C4G/87
	ZPS0600R12KS4-4G	FF150R12KS4	C4 air cooling	PS_C4G/87
	ZPS0800R12KS4-4G	FF200R12KS4	C4 air cooling	PS_C4G/87
	ZPS1200R12KS4-4G	FF300R12KS4	C4 air cooling	PS_C4G/87
	ZPS0400R12KS4-4G	FF100R12KS4	C4 air cooling	PS_C4G/87
	ZPS0400R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
	ZPS0900R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
	ZPS0300R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
IGBT <sup>3</sup> Fast IGBT <sup>3</sup>	ZPS0300R12KT3-2G	FF150R12KT3G	C2 air cooling	PS_C2G/83
	ZPS0400R12KT3-2G	FF200R12KT3	C2 air cooling	PS_C2G/83
	ZPS0600R12KT3-2G	FF300R12KT3	C2 air cooling	PS_C2G/83
	ZPS0800R12KT3-2G	FF400R12KT3	C2 air cooling	PS_C2G/83
	ZPS0450R12KT3-3G	FF150R12KT3G	C3 air cooling	PS_C3G/85
	ZPS0600R12KT3-3G	FF200R12KT3	C3 air cooling	PS_C3G/85
	ZPS0900R12KT3-3G	FF300R12KT3	C3 air cooling	PS_C3G/85
	ZPS1200R12KT3-3G	FF400R12KT3	C3 air cooling	PS_C3G/85
	ZPS0600R12KT3-3G	FF200R12KT3	C3 air cooling	PS_C3G/85
	ZPS0900R12KT3-3G	FF300R12KT3	C3 air cooling	PS_C3G/85
	ZPS0400R12KT3-4G	FF200R12KT3	C4 air cooling	PS_C4G/87
	ZPS0600R12KT3-4G	FF200R12KT3G	C4 air cooling	PS_C4G/87
	ZPS0900R12KT3-4G	FF300R12KT3	C4 air cooling	PS_C4G/87
	ZPS1200R12KT3-4G	FF400R12KT3	C4 air cooling	PS_C4G/87

Other Primestacks on request

Outline / page	Implemented IGBT Module	Type	Outline	Outline / page
IGBT <sup>2</sup> Fast	ZPS0300R12KS4-3G	FF100R12KS4	C3 air cooling	PS_C3G/85
	ZPS0450R12KS4-3G	FF150R12KS4	C3 air cooling	PS_C3G/85
	ZPS0600R12KS4-3G	FF200R12KS4	C3 air cooling	PS_C3G/85
	ZPS0900R12KS4-3G	FF300R12KS4	C3 air cooling	PS_C3G/85
	ZPS0400R12KS4-4G	FF150R12KS4	C4 air cooling	PS_C4G/87
	ZPS0600R12KS4-4G	FF150R12KS4	C4 air cooling	PS_C4G/87
	ZPS0800R12KS4-4G	FF200R12KS4	C4 air cooling	PS_C4G/87
	ZPS1200R12KS4-4G	FF300R12KS4	C4 air cooling	PS_C4G/87
	ZPS0400R12KS4-4G	FF100R12KS4	C4 air cooling	PS_C4G/87
	ZPS0400R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
	ZPS0900R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
	ZPS0300R12KS4-3W	FF300R12KS4	C3 water cooling	PS_C3W/86
IGBT <sup>3</sup>	ZPS0400R12KE3-2G	FF200R12KE3	C2 air cooling	PS_C2G/83
	ZPS0600R12KE3-2G	FF300R12KE3	C2 air cooling	PS_C2G/83
	ZPS0800R12KE3-2G	FF400R12KE3	C2 air cooling	PS_C2G/83
	ZPS0600R12KE3-3G	FF200R12KE3	C3 air cooling	PS_C3G/85
	ZPS0900R12KE3-3G	FF300R12KE3	C3 air cooling	PS_C3G/85
	ZPS1200R12KE3-3G	FF400R12KE3	C3 air cooling	PS_C3G/85
	ZPS0400R12KE3-4G	FF300R12KE3	C4 air cooling	PS_C4G/87
	ZPS1600R12KE3-4G	FF400R12KE3	C4 air cooling	PS_C4G/87
	ZPS1200R12KE3-4G	FF300R12KE3	C4 air cooling	PS_C4G/87
	ZPS0800R12KE3-4G	FF200R12KE3	C4 air cooling	PS_C4G/87
	ZPS0200R12KE3-3G	FF200R12KE3	C3 air cooling	PS_C3G/85
	ZPS0300R12KE3-3G	FF300R12KE3	C3 air cooling	PS_C3G/85
	ZPS0400R12KE3-3G	FF400R12KE3	C3 air cooling	PS_C3G/85
	ZPS1200R12KE3-3W	FF400R12KE3	C3 water cooling	PS_C3W/84
	ZPS1200R12KE3-3W	FF400R12KE3	C3 water cooling	PS_C3W/86
Fast IGBT <sup>3</sup>	ZPS0300R12KT3-2G	FF150R12KT3G	C2 air cooling	PS_C2G/83
	ZPS0400R12KT3-2G	FF200R12KT3	C2 air cooling	PS_C2G/83
	ZPS0600R12KT3-2G	FF300R12KT3	C2 air cooling	PS_C2G/83
	ZPS0800R12KT3-2G	FF400R12KT3	C2 air cooling	PS_C2G/83
	ZPS0450R12KT3-3G	FF150R12KT3G	C3 air cooling	PS_C3G/85
	ZPS0600R12KT3-3G	FF200R12KT3	C3 air cooling	PS_C3G/85
	ZPS0900R12KT3-3G	FF300R12KT3	C3 air cooling	PS_C3G/85
	ZPS1200R12KT3-3G	FF400R12KT3	C3 air cooling	PS_C3G/85
	ZPS0600R12KT3-3G	FF200R12KT3	C3 air cooling	PS_C3G/85
	ZPS0900R12KT3-3G	FF300R12KT3	C3 air cooling	PS_C3G/85
	ZPS0400R12KT3-4G	FF200R12KT3	C4 air cooling	PS_C4G/87
	ZPS0600R12KT3-4G	FF200R12KT3G	C4 air cooling	PS_C4G/87
	ZPS0900R12KT3-4G	FF300R12KT3	C4 air cooling	PS_C4G/87
	ZPS1200R12KT3-4G	FF400R12KT3	C4 air cooling	PS_C4G/87

Fast IGBT <sup>3</sup>	Type	Implemented IGBT Module	Outline	Outline / page
	2PS1200R12KT3-4G	FF300R12KT3	C4 air cooling	PS_C4G/87
	2PS1600R12KT3-4G	FF400R12KT3	C4 air cooling	PS_C4G/87
	6PS0150R12KT3-3G	FF150R12KT3G	C3 air cooling	PS_C3G/85
	6PS0200R12KT3-3G	FF200R12KT3	C3 air cooling	PS_C3G/85
	6PS0300R12KT3-3G	FF300R12KT3	C3 air cooling	PS_C3G/85
	6PS0400R12KT3-3G	FF400R12KT3	C3 air cooling	PS_C3G/85
With 1700V IGBT Modules				
IGBT <sup>2</sup> Low Loss	2PS0200R17DLC-2G	BSM100GB170DLC	C2 air cooling	PS_C2G/83
	2PS0300R17DLC-2G	BSM150GB170DLC	C2 air cooling	PS_C2G/83
	2PS0400R17DLC-2G	BSM200GB170DLC	C2 air cooling	PS_C2G/83
	2PS0300R17DLC-3G	BSM100GB170DLC	C3 air cooling	PS_C3G/85
	2PS0450R17DLC-3G	BSM150GB120DLC	C3 air cooling	PS_C3G/85
	2PS0600R17DLC-3G	BSM200GB170DLC	C3 air cooling	PS_C3G/85
	2PS0400R17DLC-4G	BSM100GB170DLC	C4 air cooling	PS_C4G/87
	2PS0600R17DLC-4G	BSM150GB170DLC	C4 air cooling	PS_C4G/87
	2PS0800R17DLC-4G	BSM200GB170DLC	C4 air cooling	PS_C4G/87
	6PS0100R17DLC-3G	BSM100GB170DLC	C3 air cooling	PS_C3G/85
	6PS0150R17DLC-3G	BSM150GB170DLC	C3 air cooling	PS_C3G/85
	6PS0200R17DLC-3G	BSM200GB170DLC	C3 air cooling	PS_C3G/85
IGBT <sup>1</sup>	2PS0400R17KE3-2G	FF200R17KE3	C2 air cooling	PS_C2G/83
	2PS0600R17KE3-2G	FF300R17KE3	C2 air cooling	PS_C2G/83
	2PS0900R17KE3-3G	FF300R17KE3	C3 air cooling	PS_C3G/85
	2PS0800R17KE3-4G	FF200R17KE3	C4 air cooling	PS_C4G/87
	2PS1200R17KE3-4G	FF300R17KE3	C4 air cooling	PS_C4G/87
	6PS0200R17KE3-3G	FF200R17KE3	C3 air cooling	PS_C3G/85
	6PS0300R17KE3-3G	FF300R17KE3	C3 air cooling	PS_C3G/85

Other PrimeSTACKs on request

## PrimeSTACK Type Designation System:

**Descriptors**  
 G = forced air cooling  
 W = water cooling  
 F = fan included




**Options**  
 M = Master  
 S = slave, single use  
 O = fiber optic interface  
 X = voltage signal interface



Topology (see below)  
 PrimeSTACK  
 Rated Current at  $T_{cmax} = 80^{\circ}C$   
 Rated Voltage of Used IGBT  
 Chip Type According to  
 eucpec Designation System  
 Size  
 Options (chopper, cooling etc.)

2PS0600R12DLC-3X



## IGBT PrimeSTACK Topology

Acronym	half bridge, 2pack	H - bridge, 4pack	3 phase bridge, 6pack	3 phase bridge + brake, 6pack + chopper

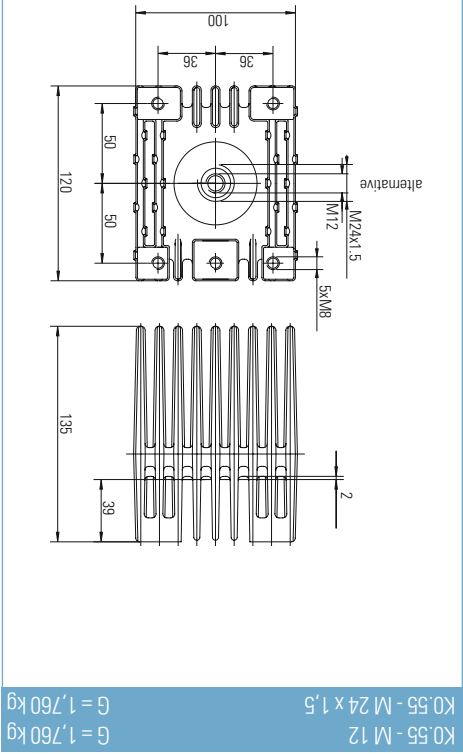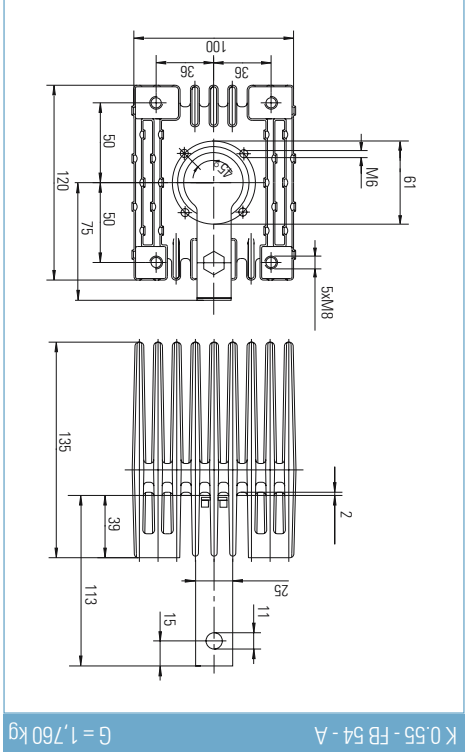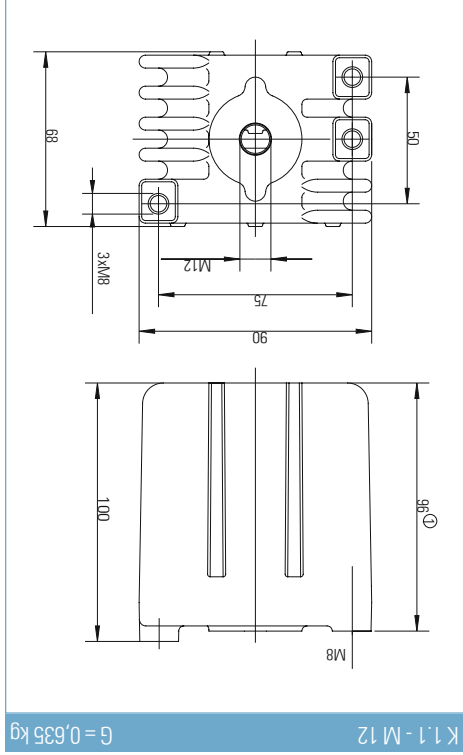

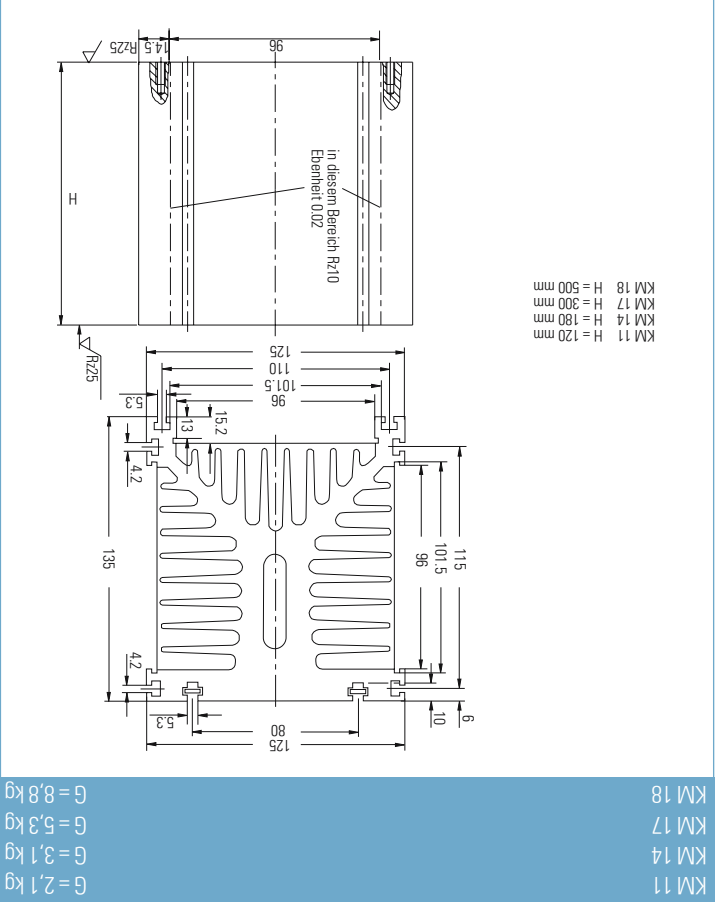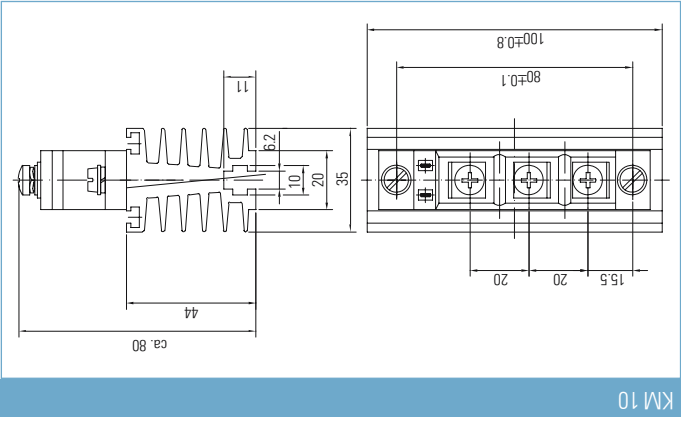


KA 20-X-V

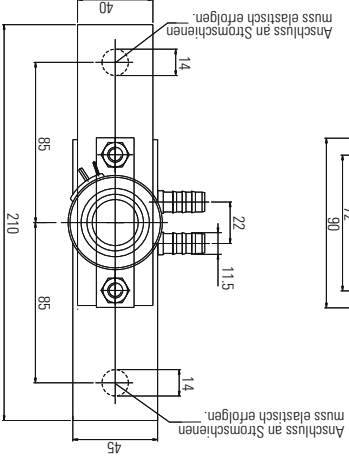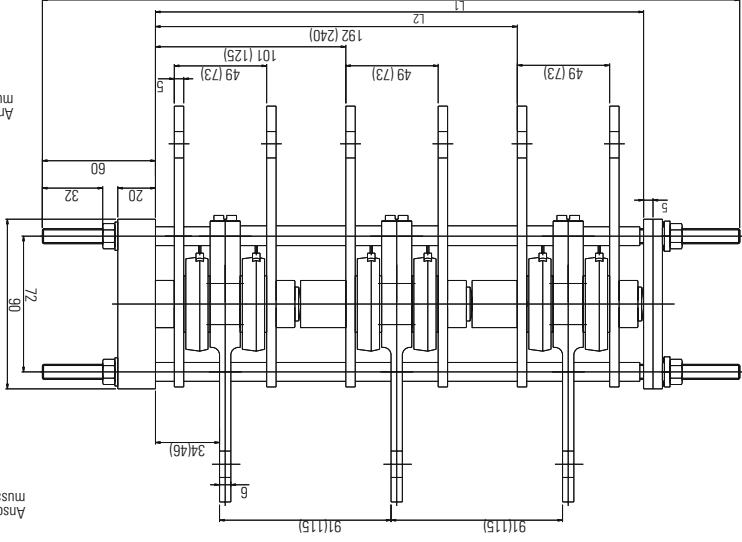



(...) für Bauelemente s=26

Anzahl d.	Typ	L1	L2	Thy./Di.
6 (s=14mm)	-KA20-6..	370	259	
4 (s=14mm)	-KA20-4..	280	168	
7 (s=14mm)	-KA20-7..	190	77	
6 (s=26mm)	-KA20-6Z..	445	331	
4 (s=26mm)	-KA20-4Z..	325	216	
2 (s=26mm)	-KA20-2Z..	210	101	

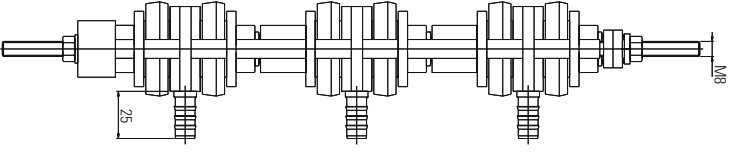


for discs Ø 41, 50, 57, 60 mm  
 maximum clamping force 10kN  
 supply voltage 500Veff

KC 20-X-E

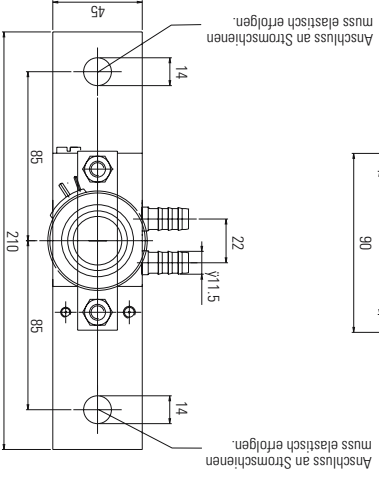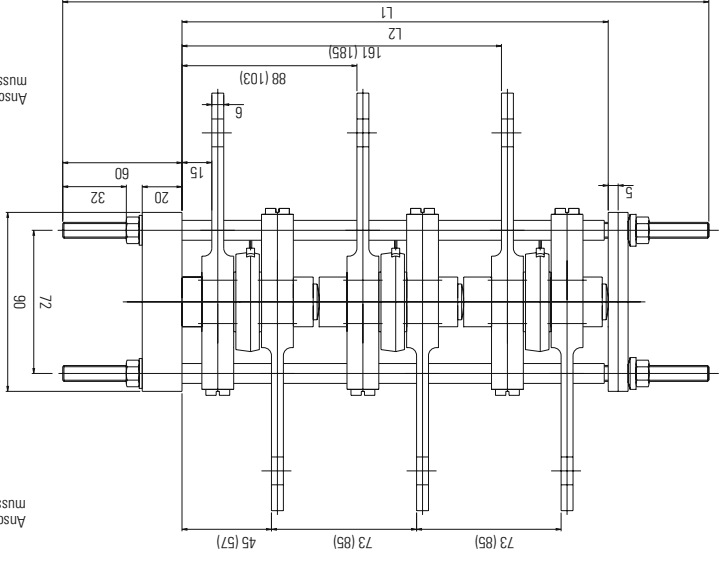

(...) für Bauelemente s=26

Anzahl d.	Typ	L1	L2	Thy./Di.
3 (s=14mm)	-KC20-3E	325	215	
2 (s=14mm)	-KC20-2E	250	142	
1 (s=14mm)	-KC20-1E	175	69	
3 (s=26mm)	-KC20-3E	360	251	
2 (s=26mm)	-KC20-2E	275	166	
1 (s=26mm)	-KC20-1E	190	81	


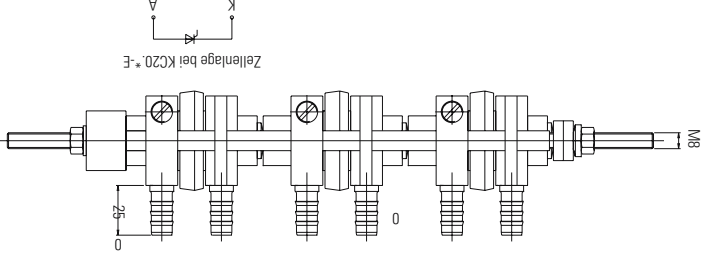


for discs Ø 41, 50, 57, 60 mm  
 maximum clamping force 10kN  
 supply voltage 500Veff







Zellenlage bei KC20-X-E









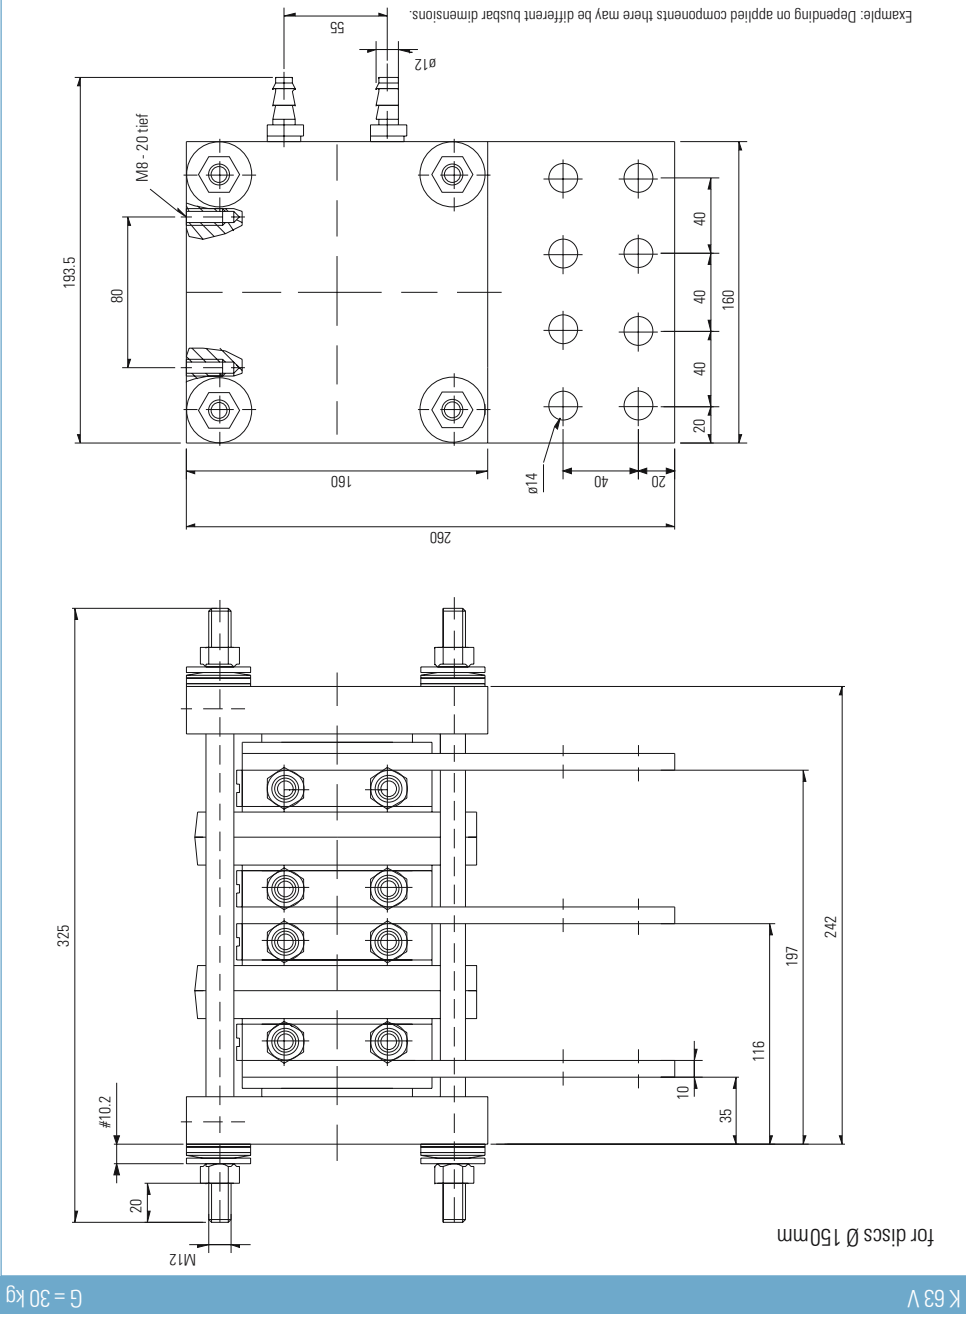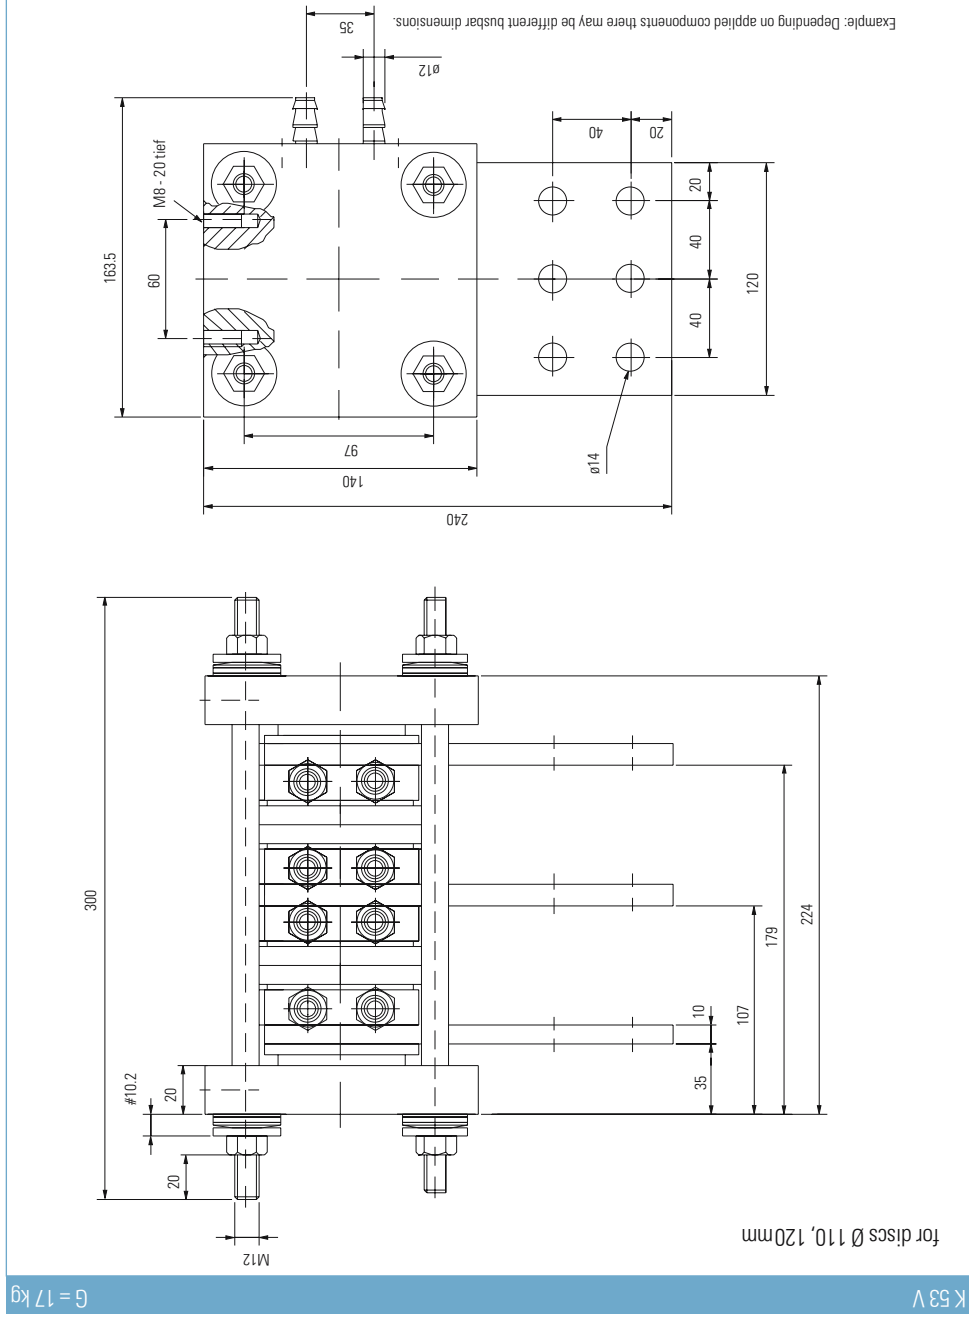

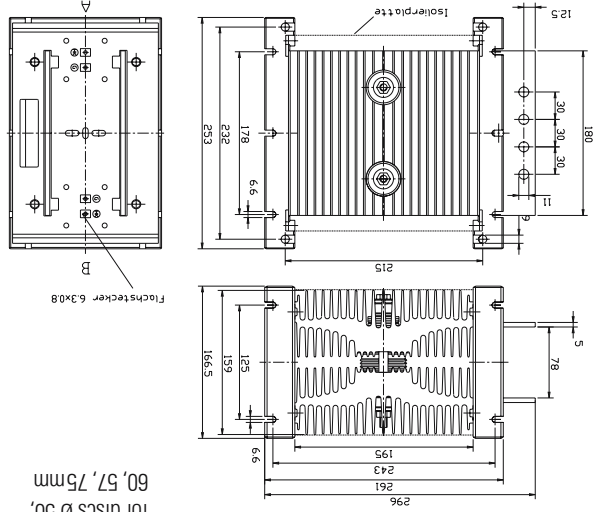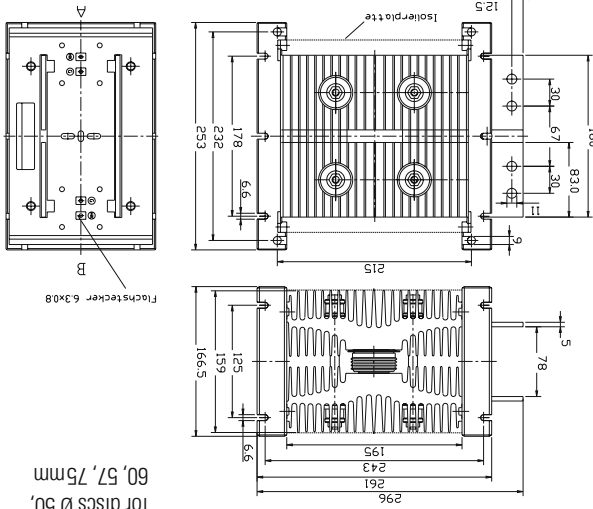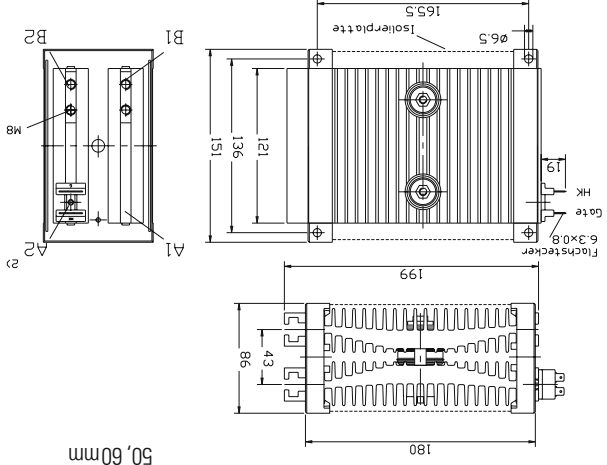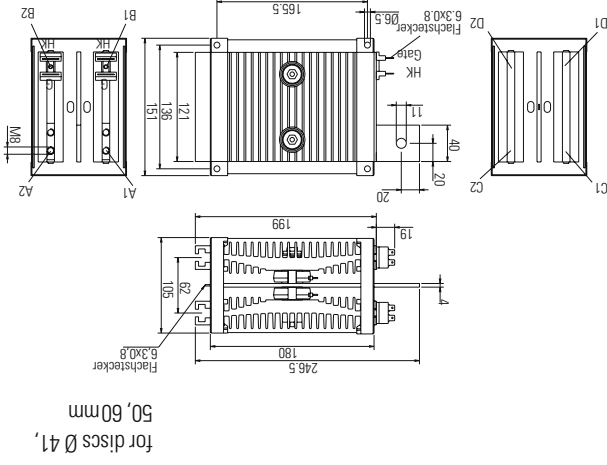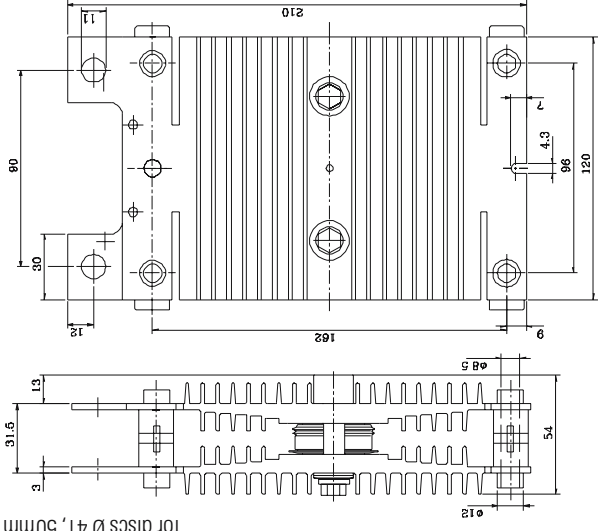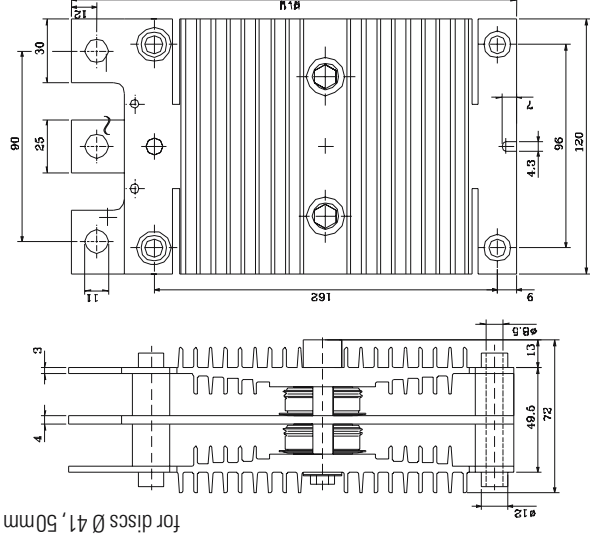


K 0.05 F / K 0.05.7 F   
 G = 9 kgfor discs  $\varnothing 50$ ,  
60, 57, 75 mmK 0.08 F / K 0.08.7 F / K 0.08.8 F   
 G = 9 kgfor discs  $\varnothing 50$ ,  
60, 57, 75 mmK 0.12 F   
 G = 2.5 kgfor discs  $\varnothing 41$ ,  
50, 60 mmK 0.22 F   
 G = 3 kgfor discs  $\varnothing 41$ ,  
50, 60 mmKK 32   
 G = 1 kgfor discs  $\varnothing 41$ , 50 mmKK 34   
 G = 1.3 kgfor discs  $\varnothing 41$ , 50 mm

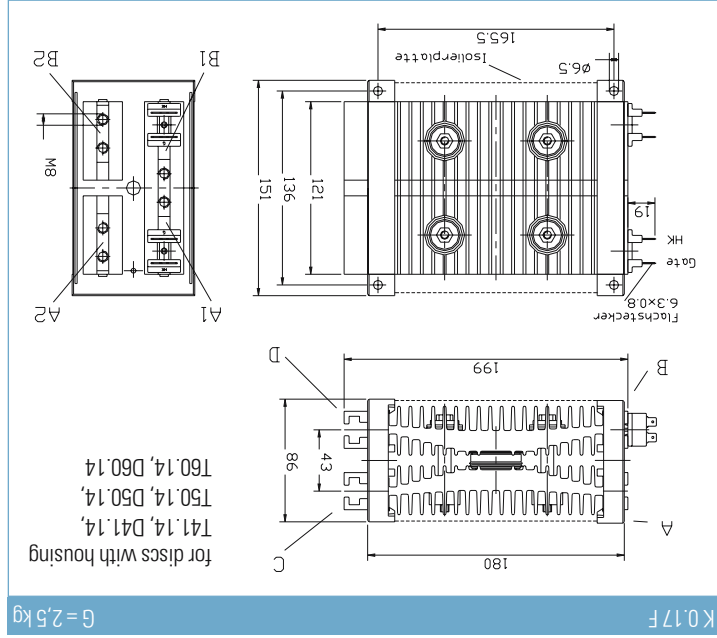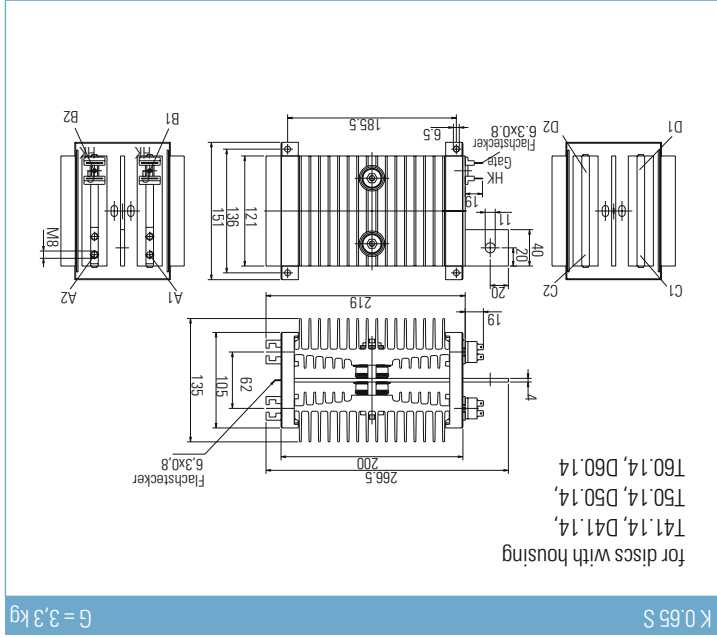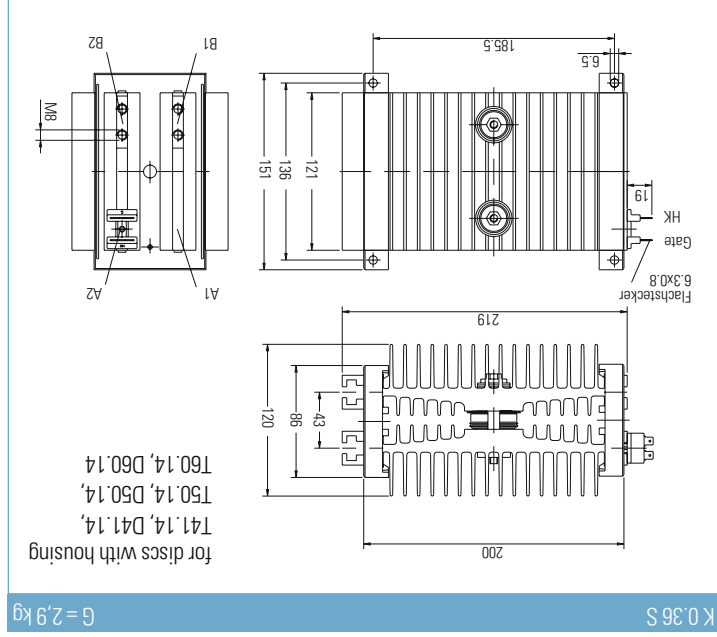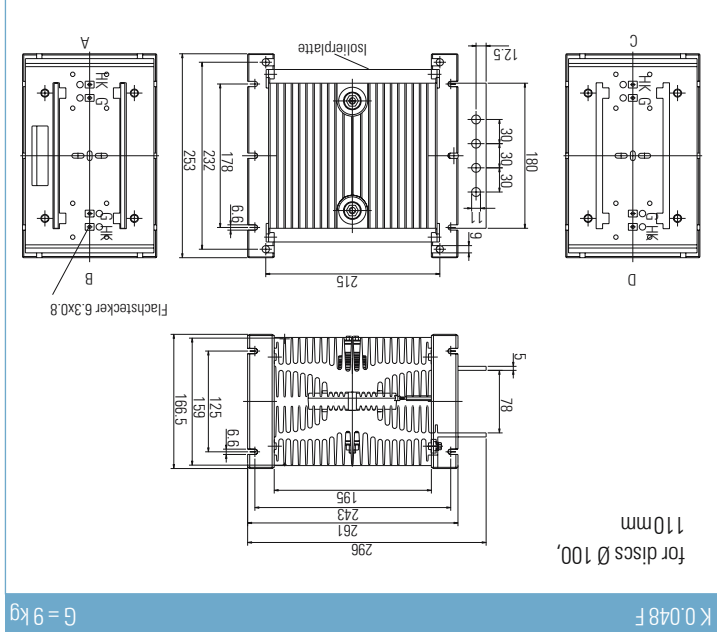


KE 01


G = 18,8 kg

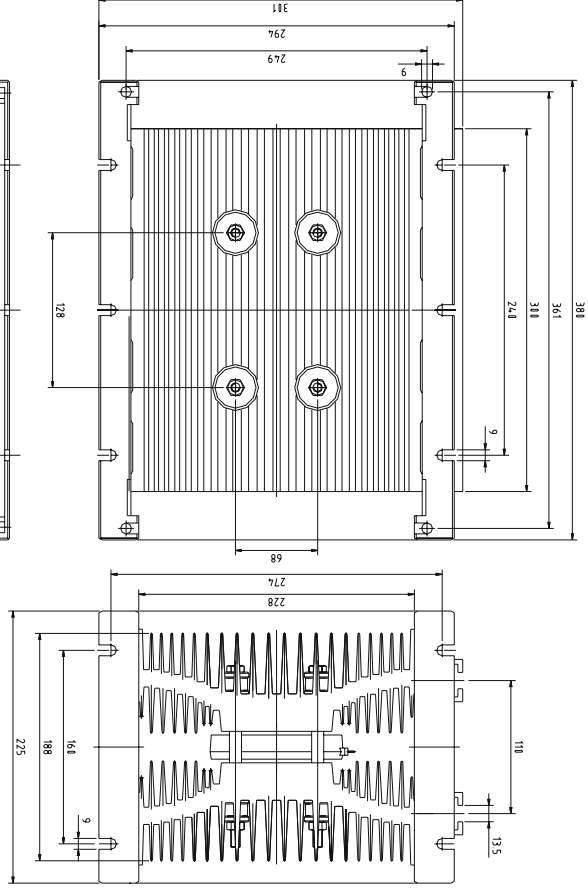for discs with maximum  $\varnothing$  150mm


KE 02

G = 18,5 kg

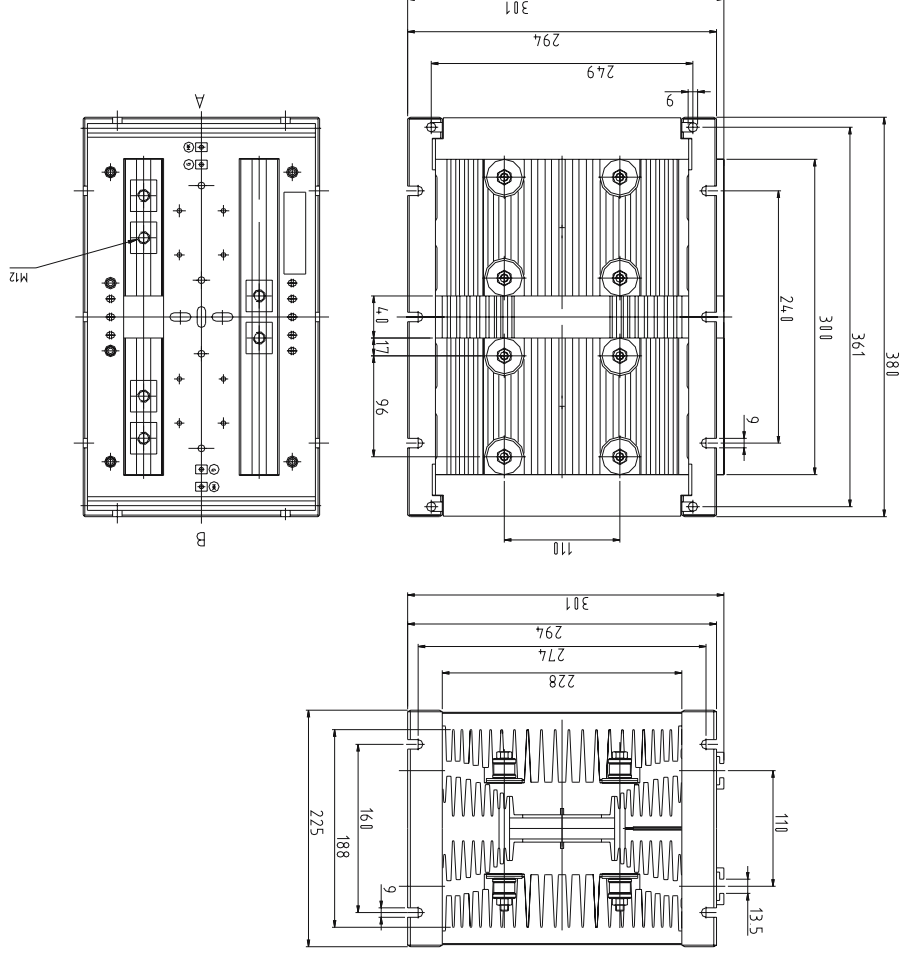
for discs with maximum  $\varnothing$  120mm

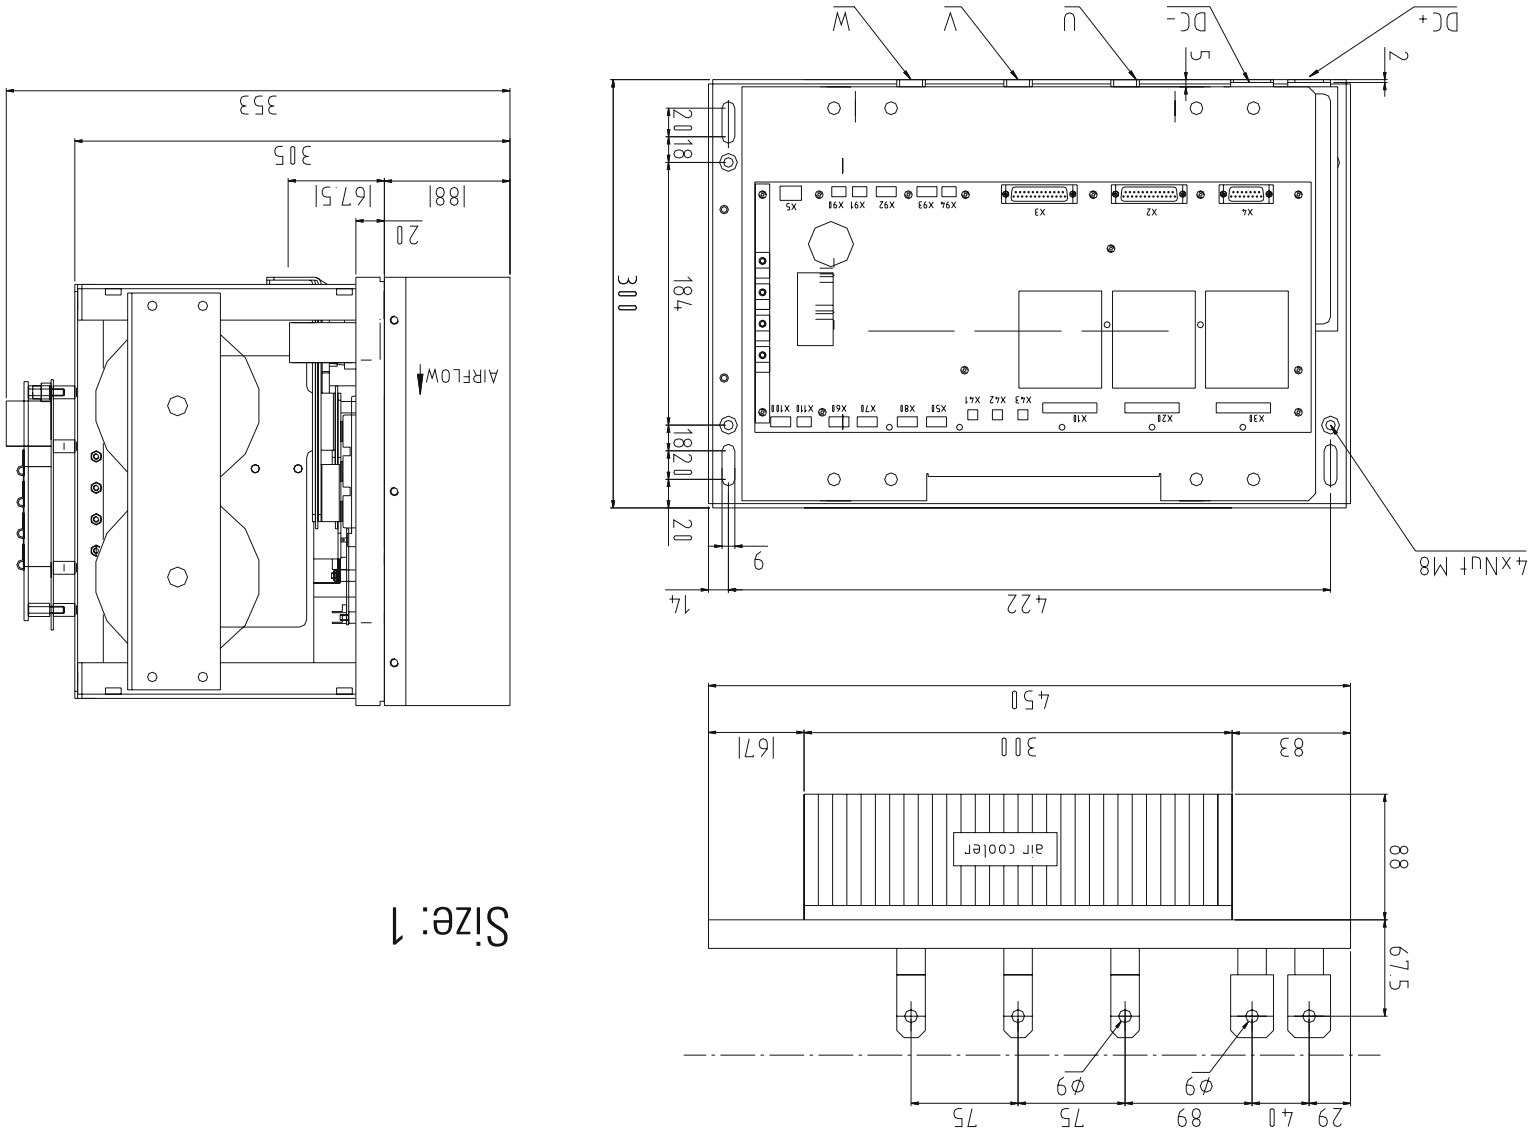


Size: 1

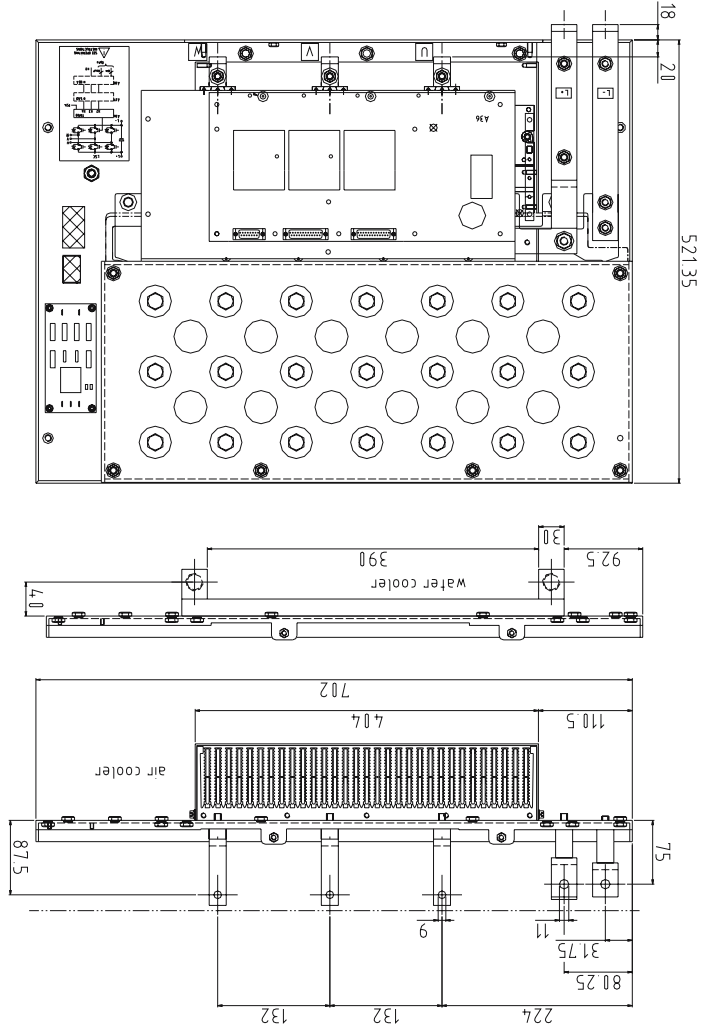

Size: 2



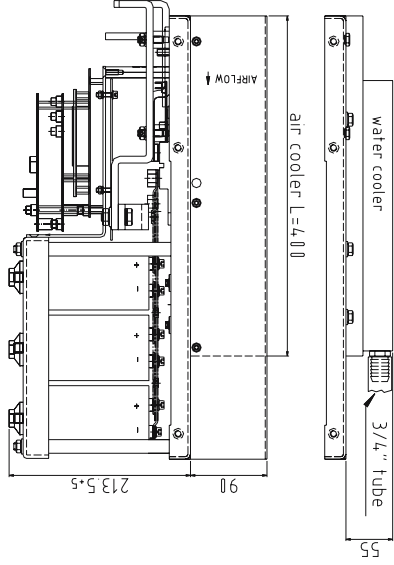





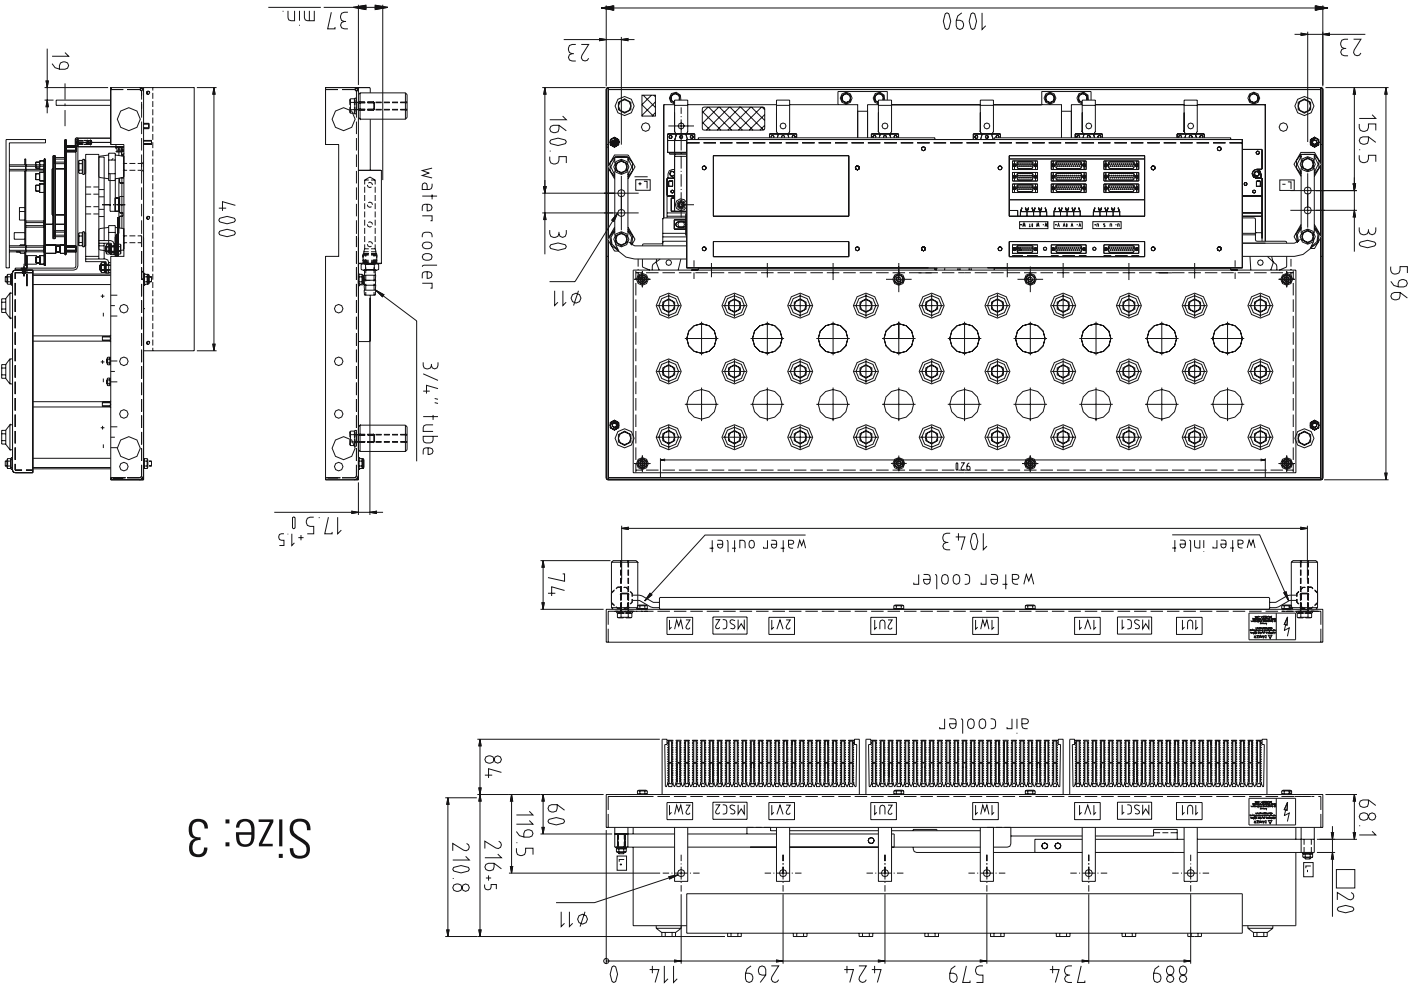


Size: 3

Size: 4

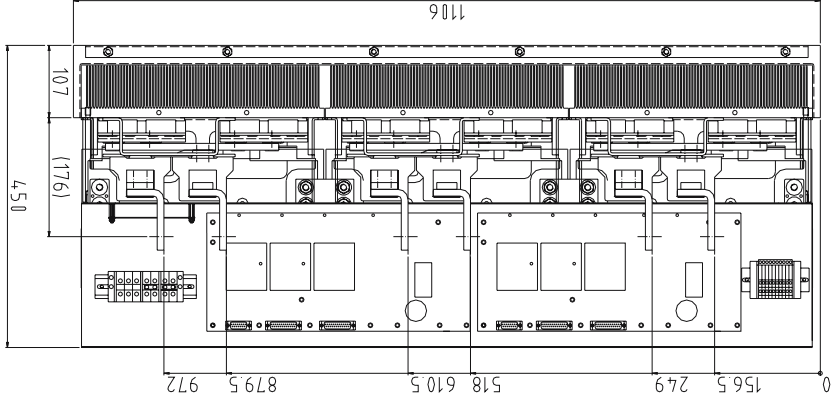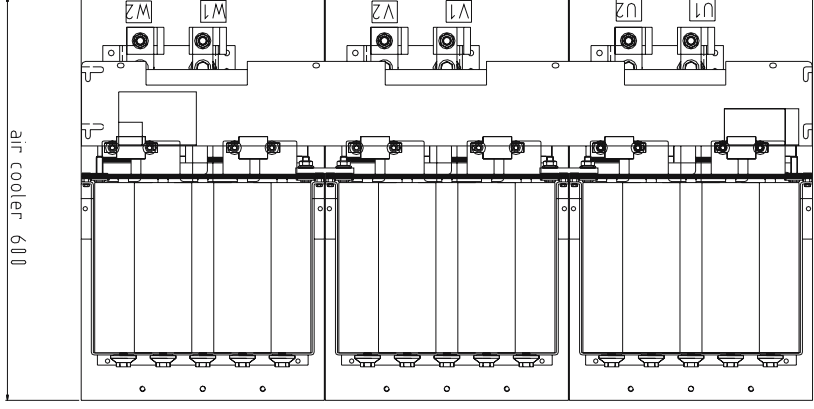
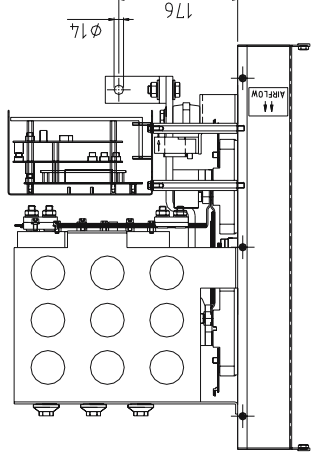


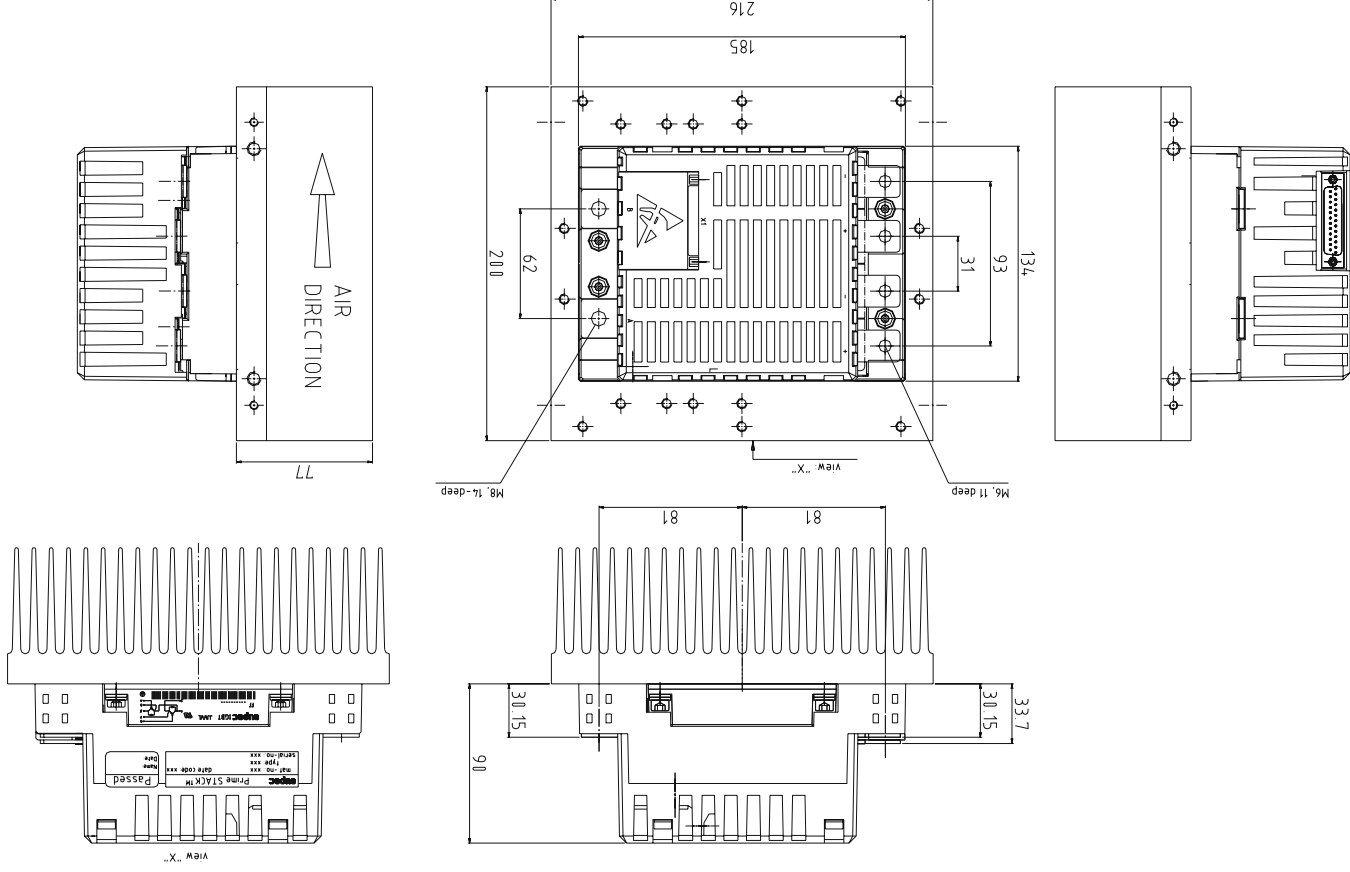




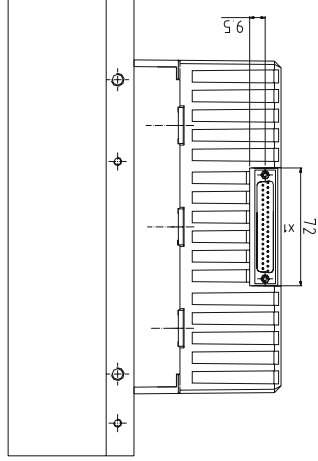

X1= 37 contacts, SUB-D, male

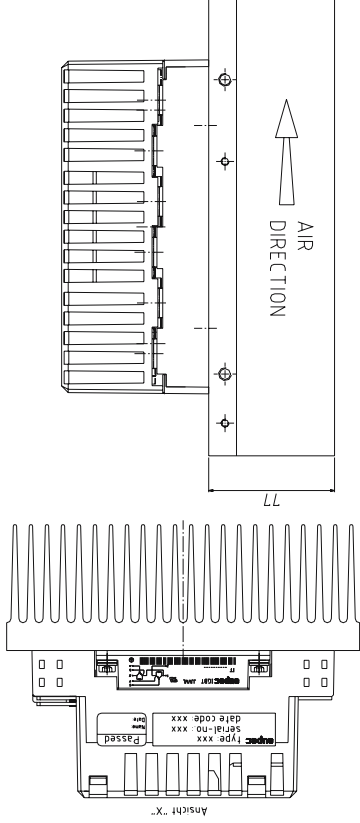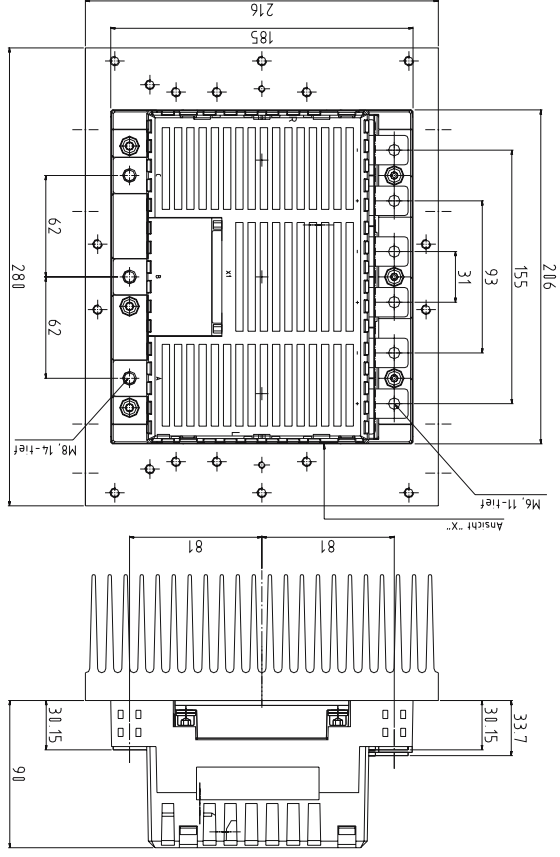







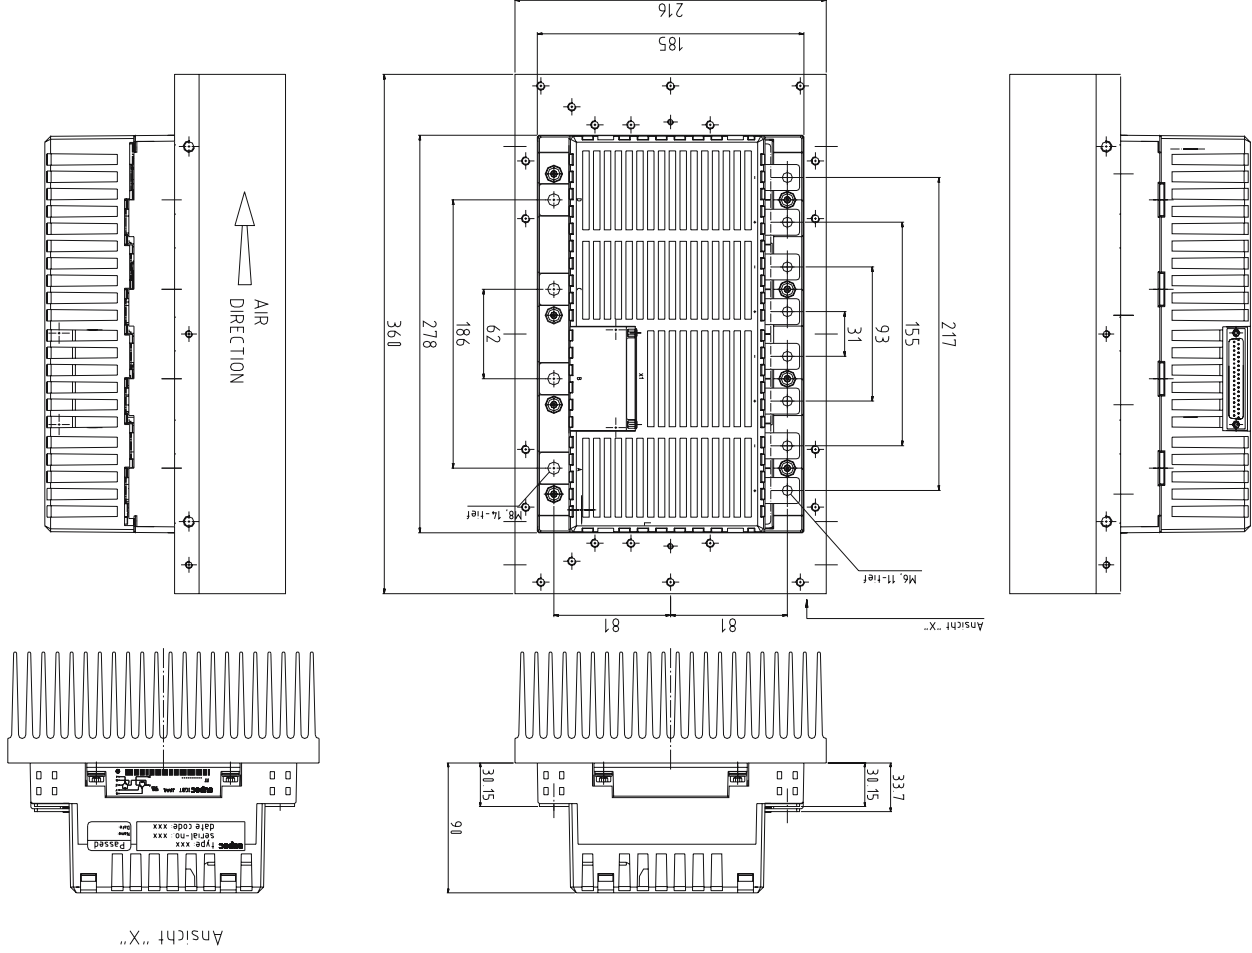




X1= 37/25 contacts, SUB-D, male

X1= 37/25 contacts, SUB-D, male

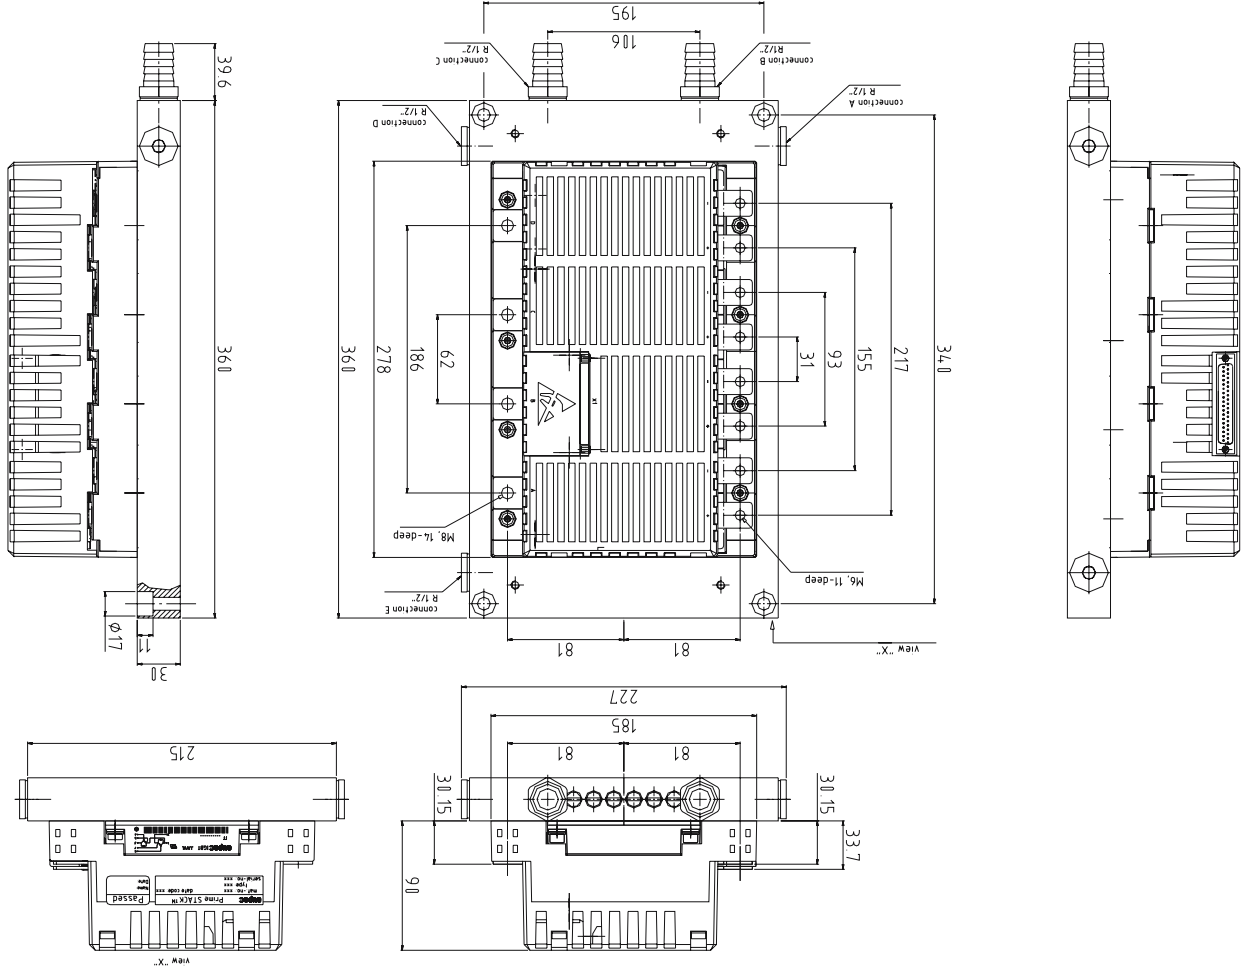



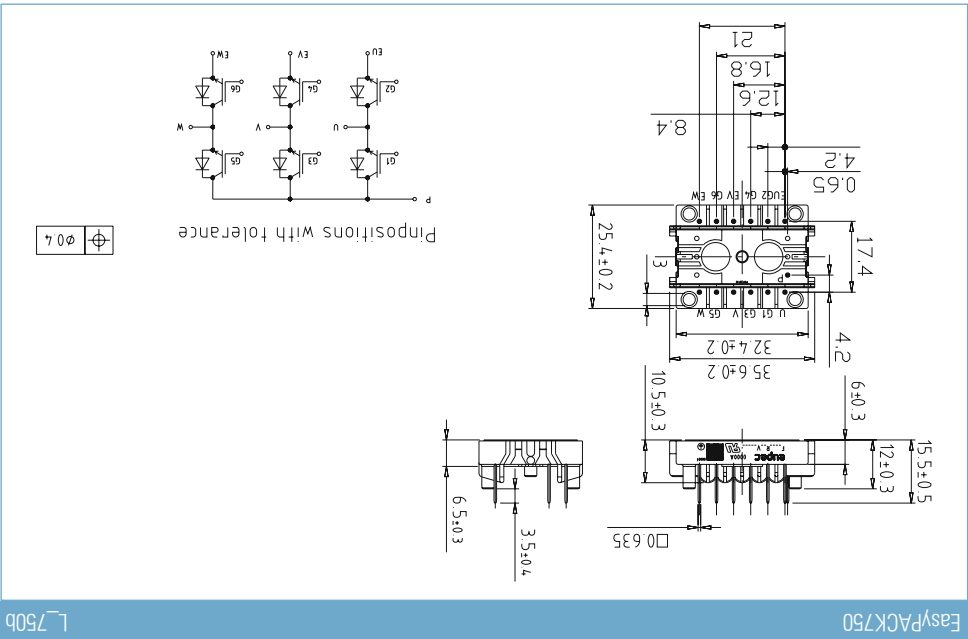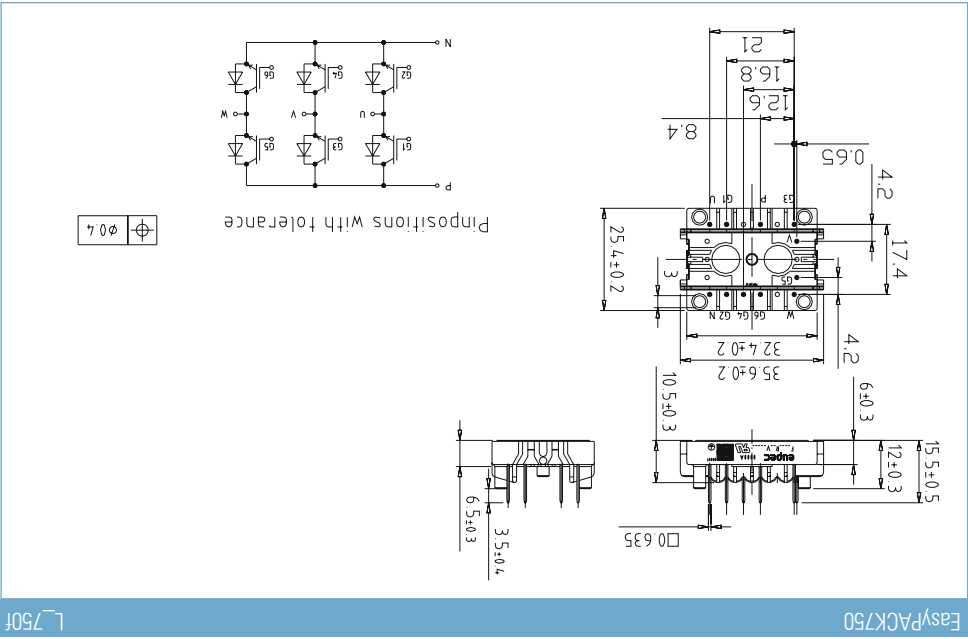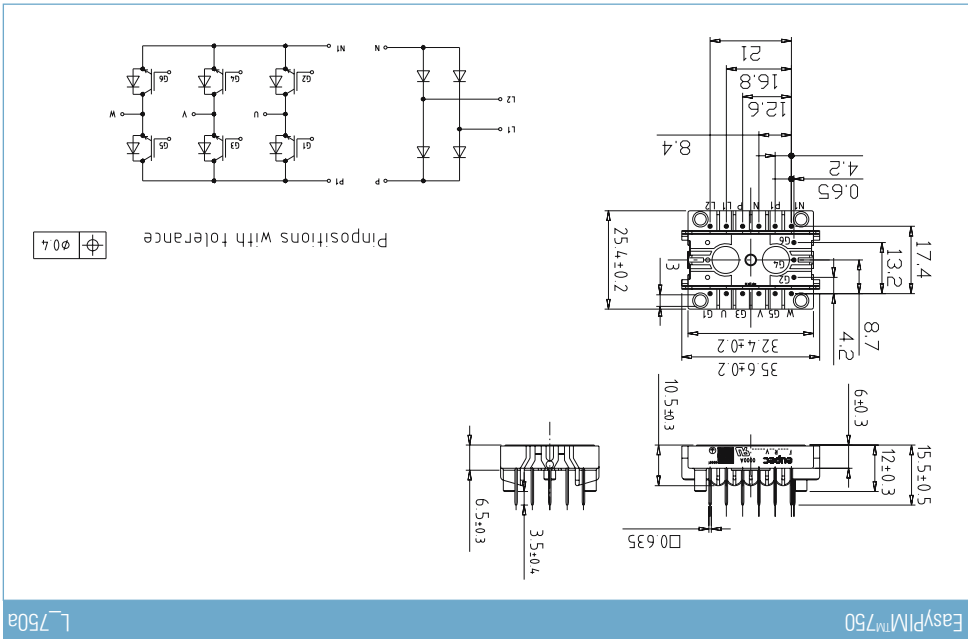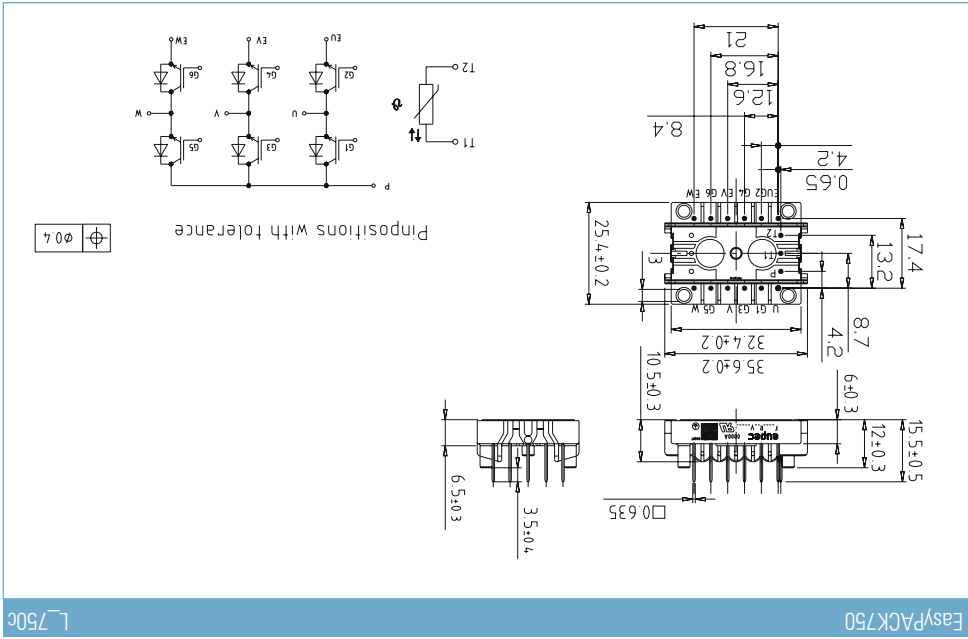

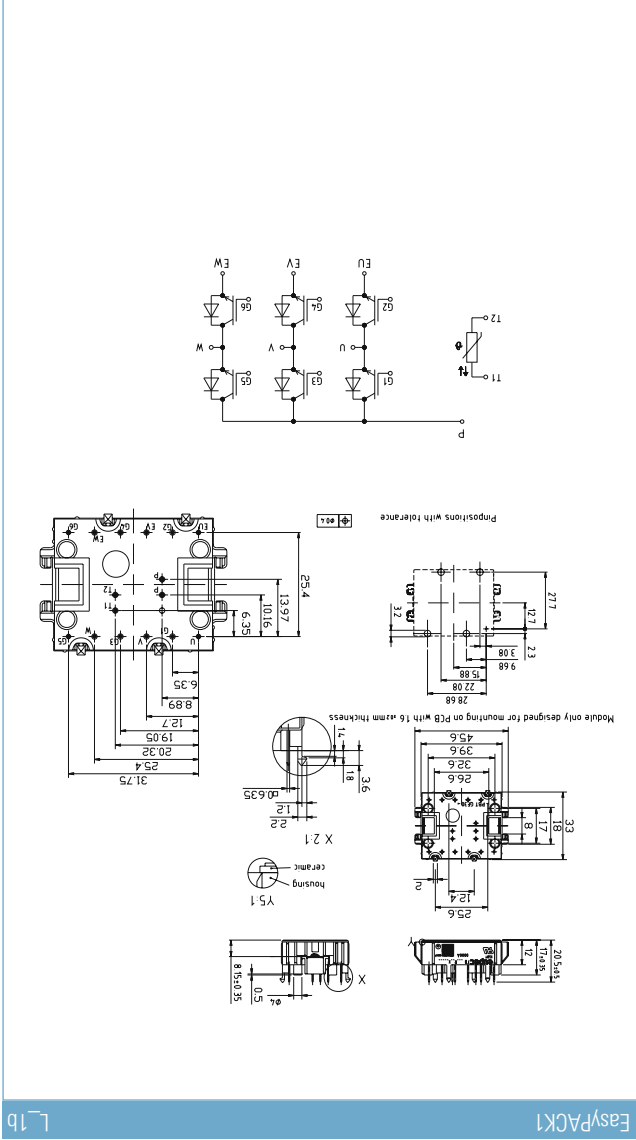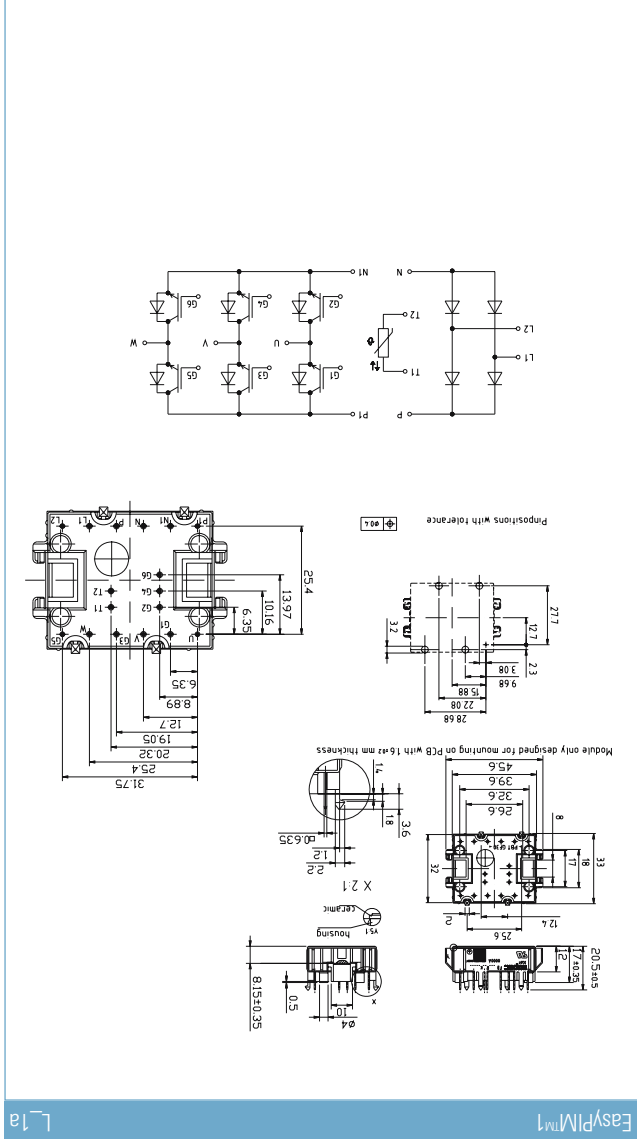


















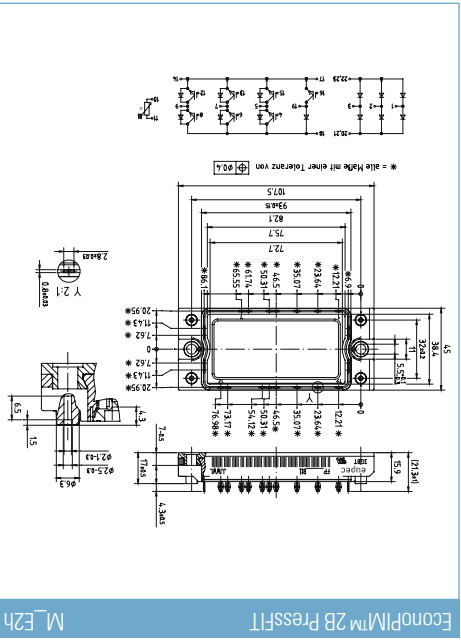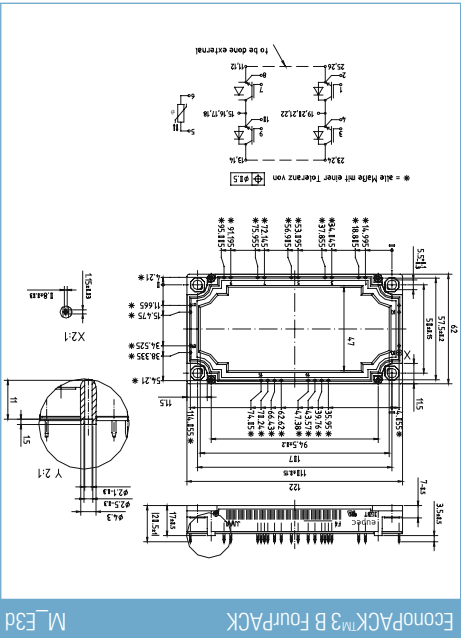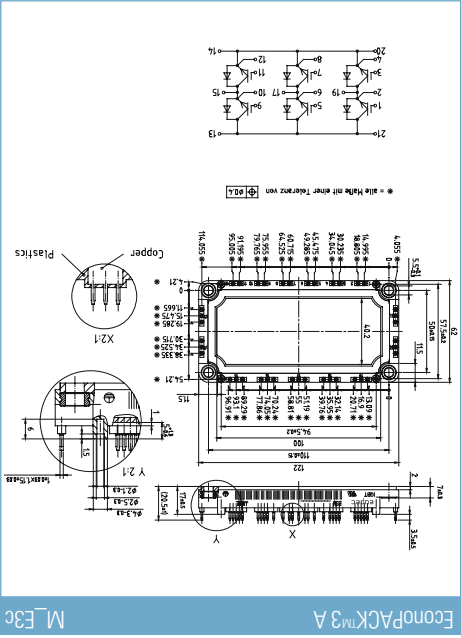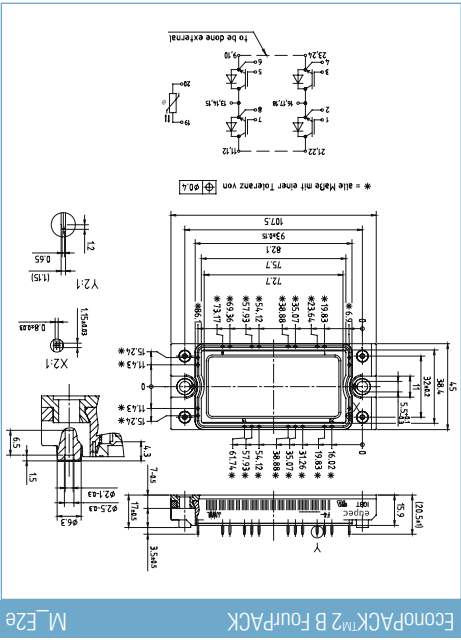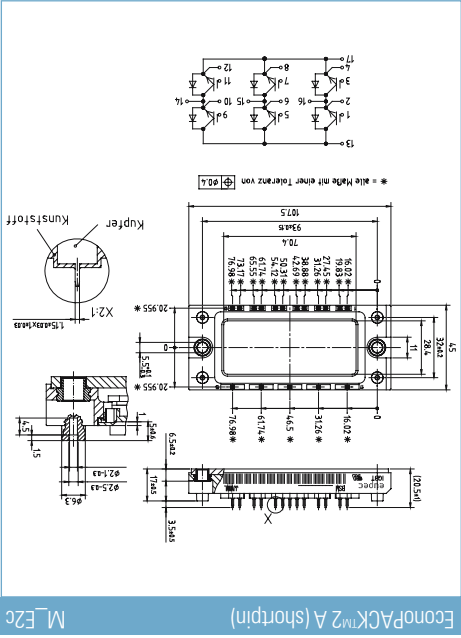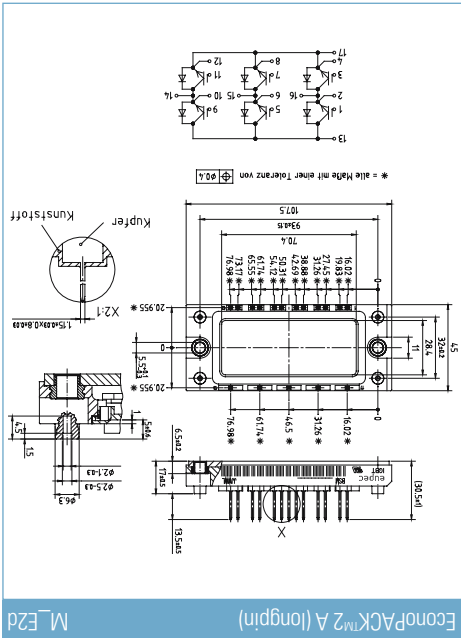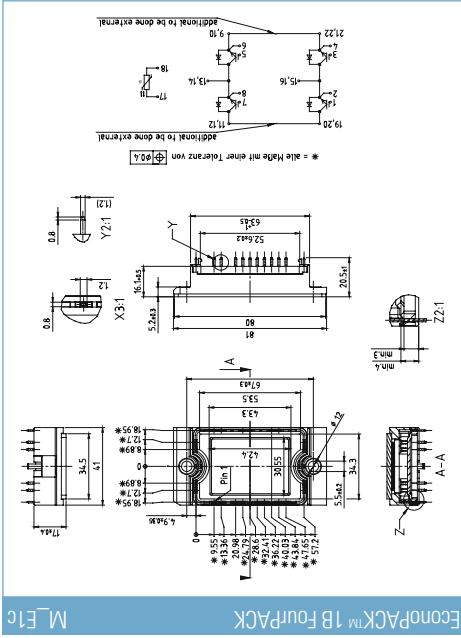





M\_34a 34 mm Module

M\_62e Single Diode 62

M\_62a 62 mm Module

M\_62e Dual Diode 62

M\_62b Single Switch 62





M\_62c Single Switch 62, collector sense











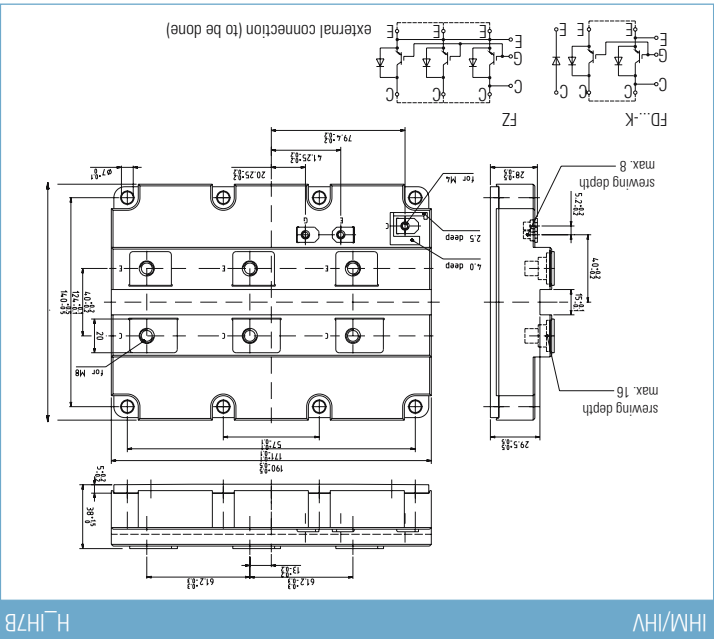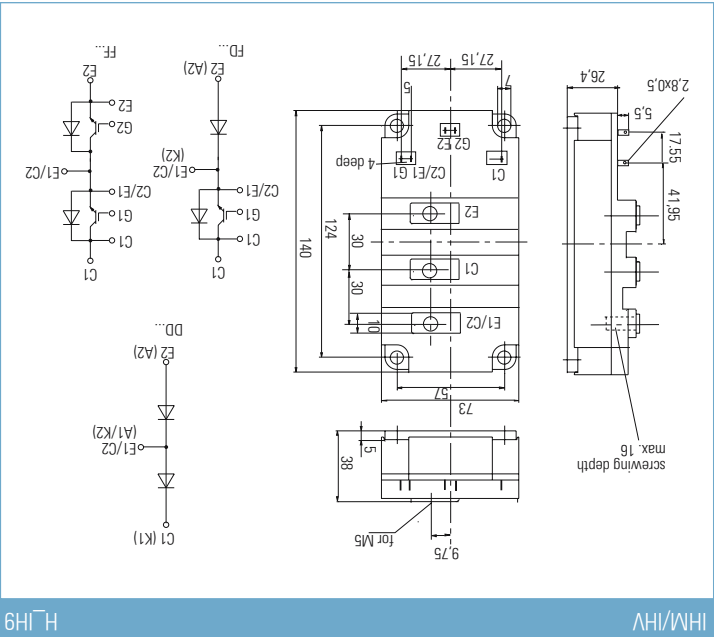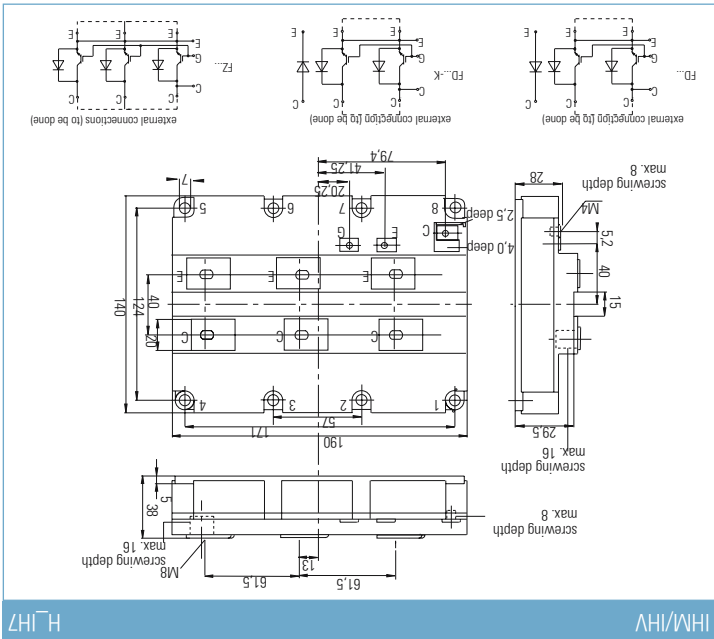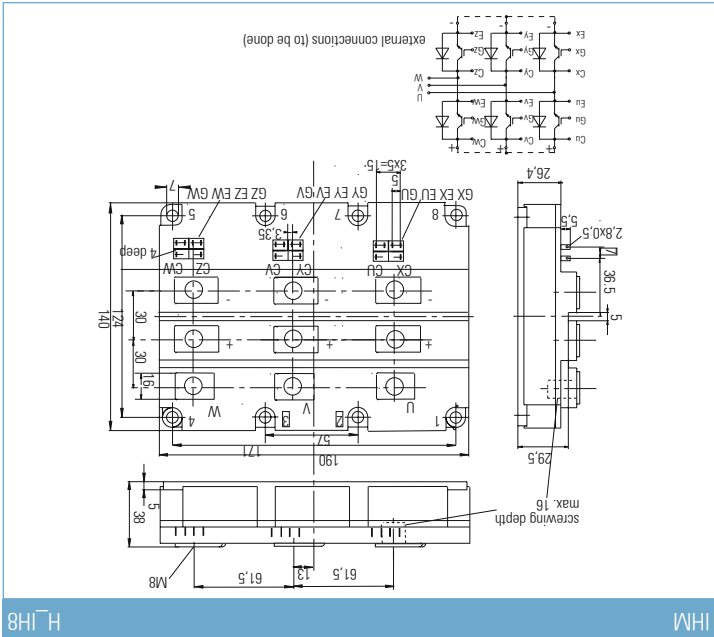


IHV\_H1H10

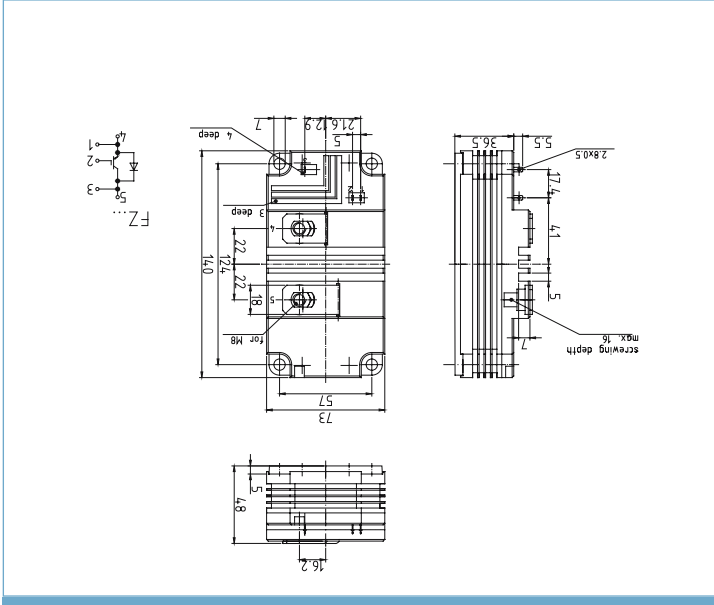

IHV\_H1H12

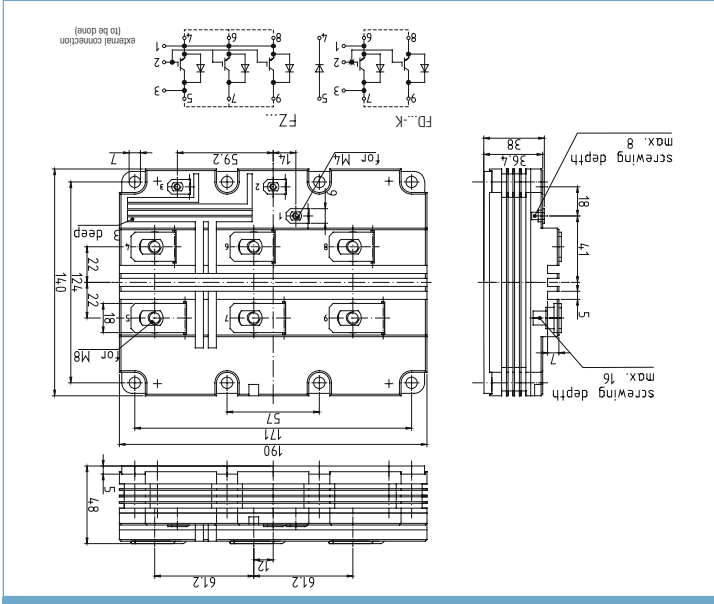


IHV\_H1H11

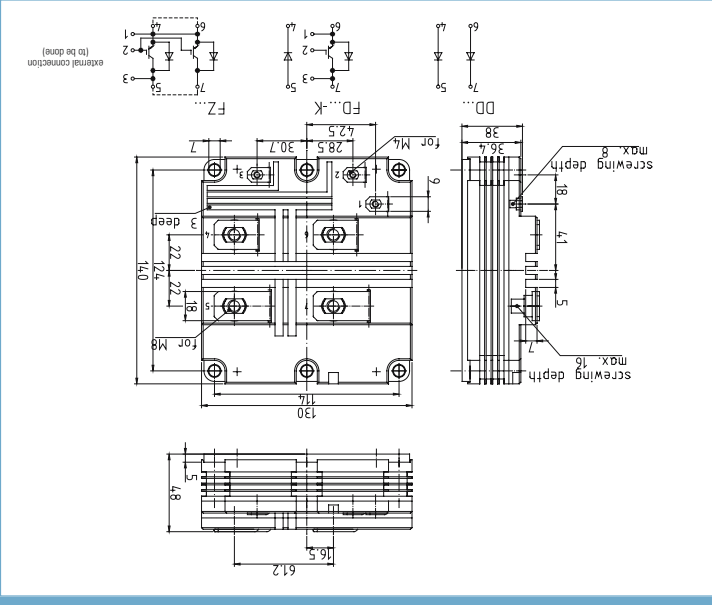






Econobridge™ Rectifier 2

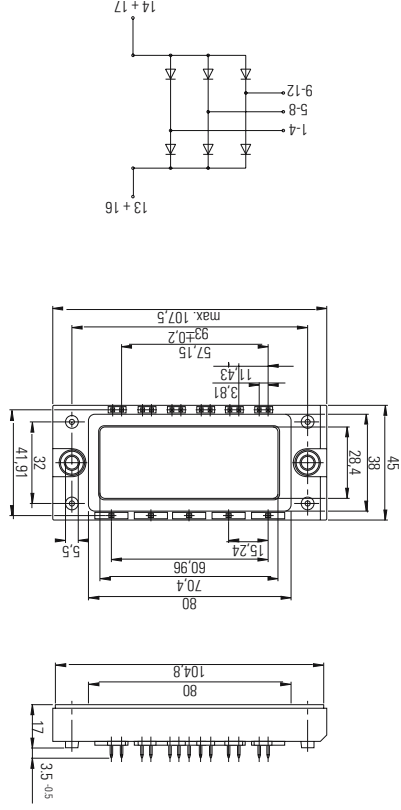


M\_E2g

Econobridge™ Rectifier 2

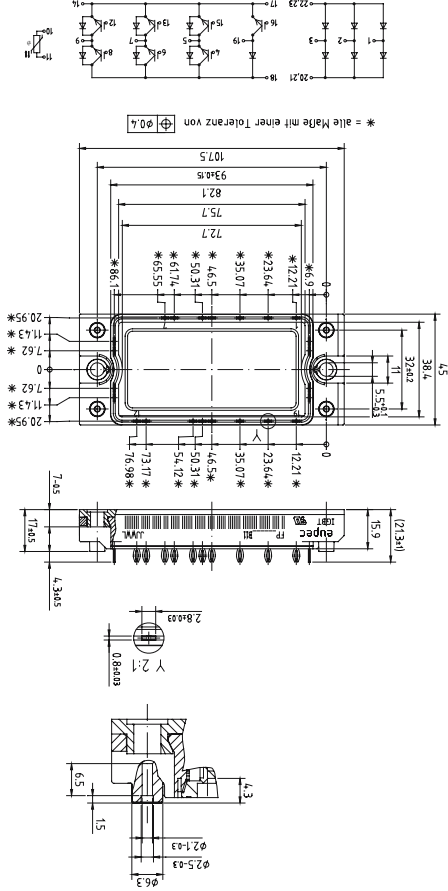


M\_E2h

Econobridge™ Rectifier 2


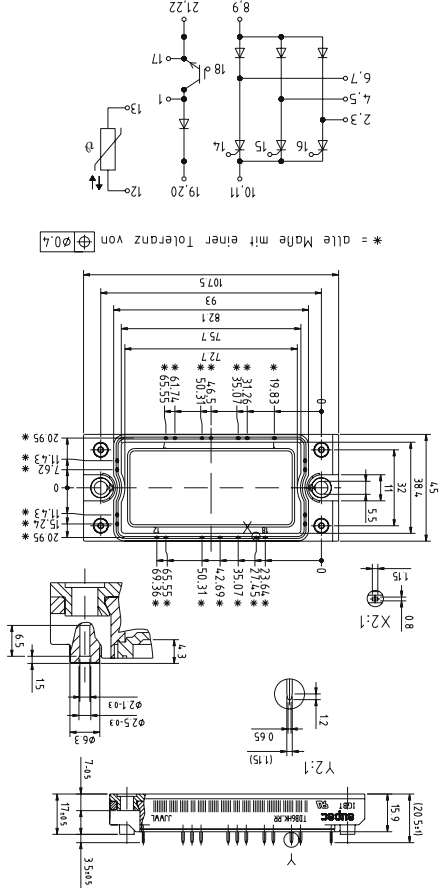









M\_E2i





Econobridge™ Rectifier 2







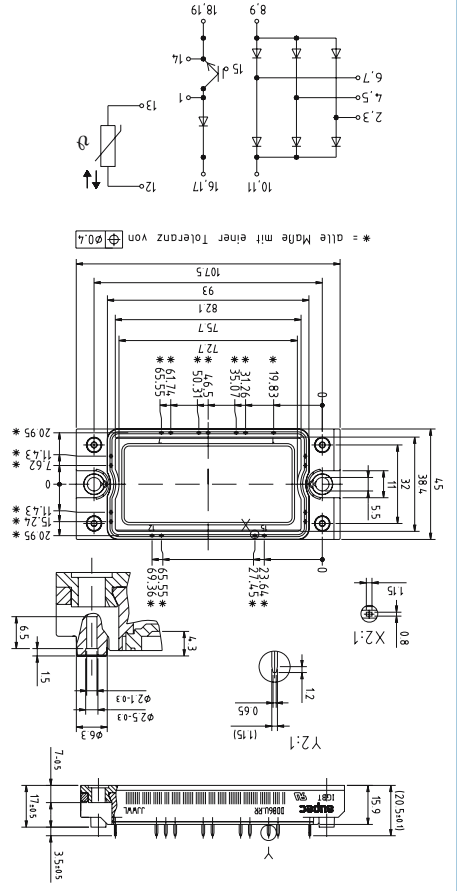






M\_E2j

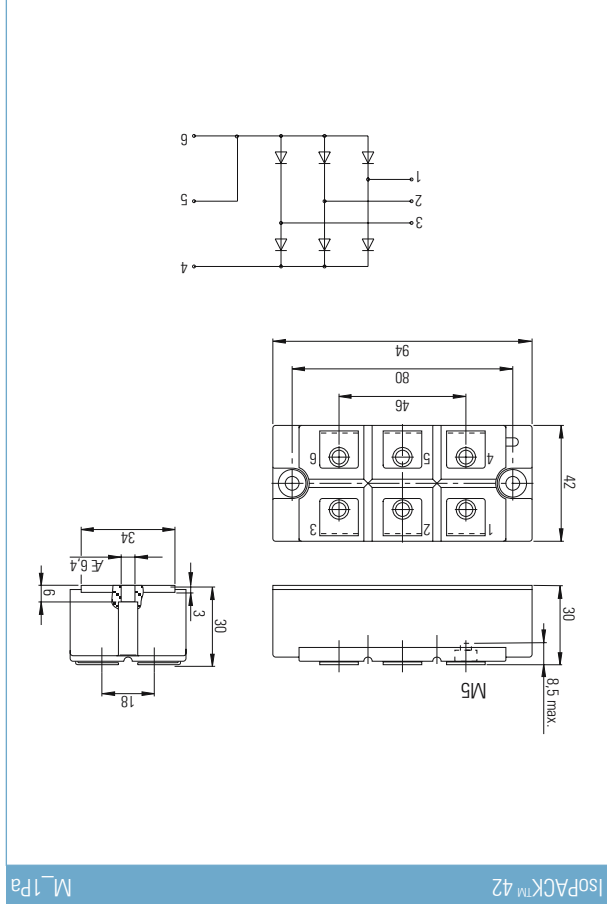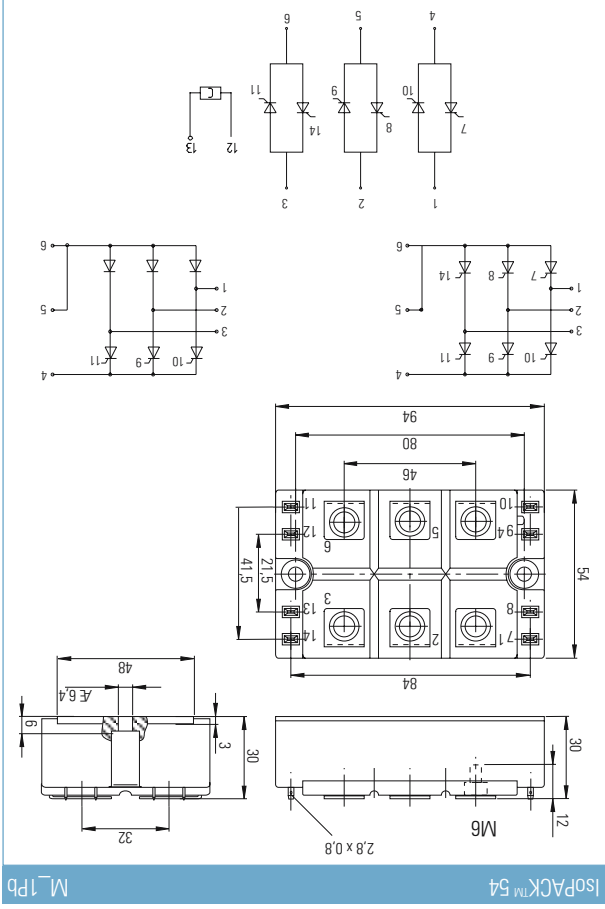

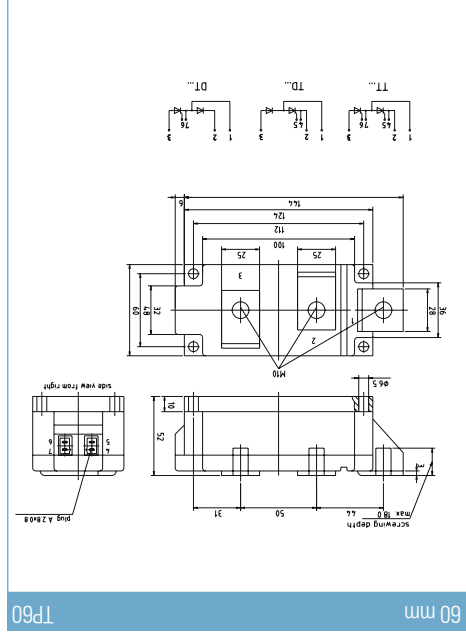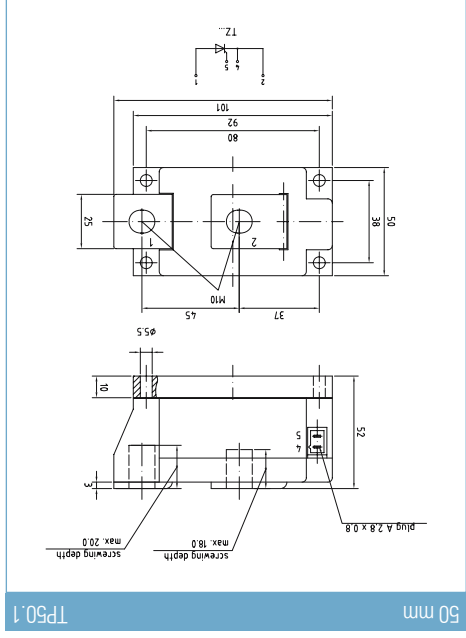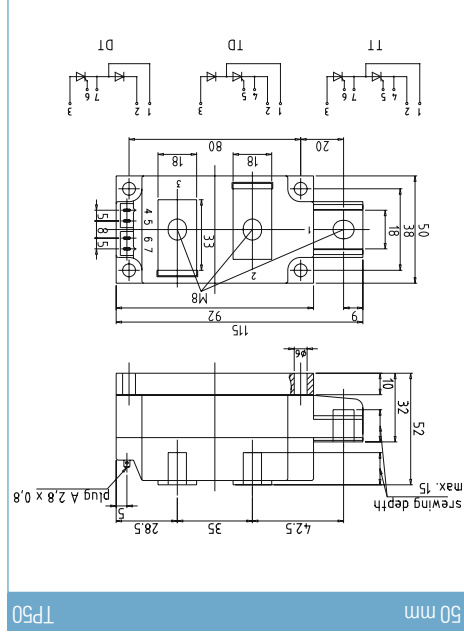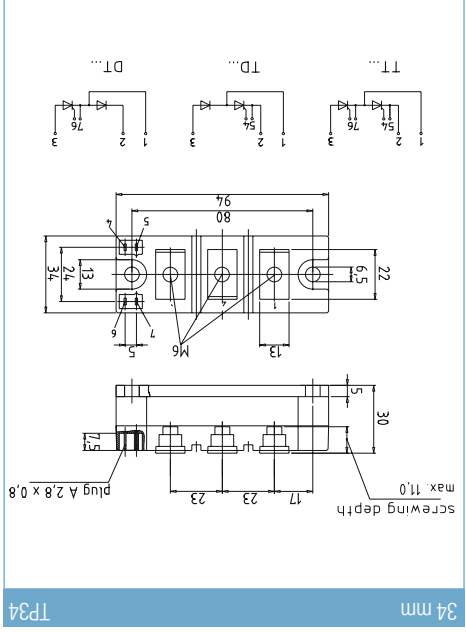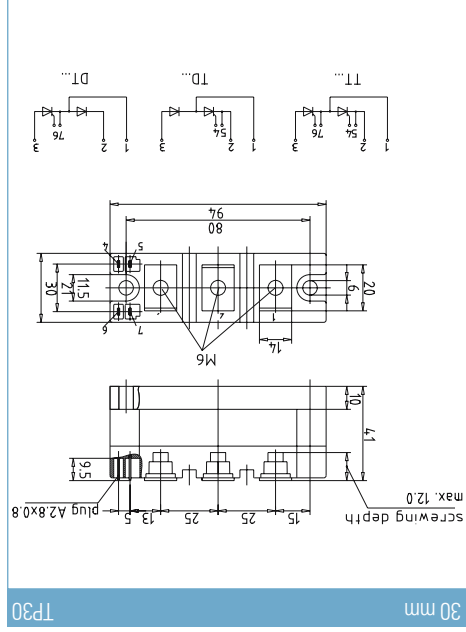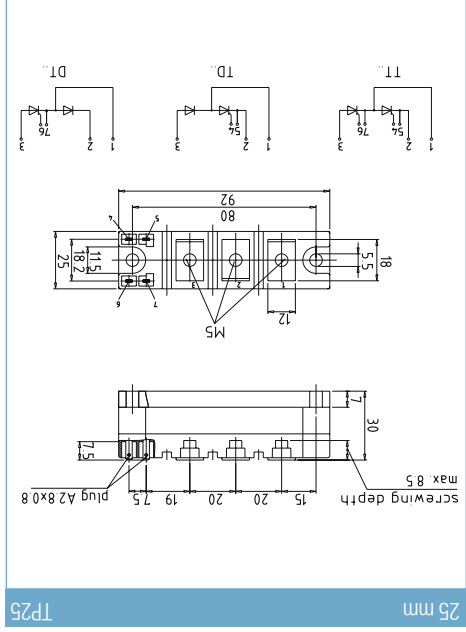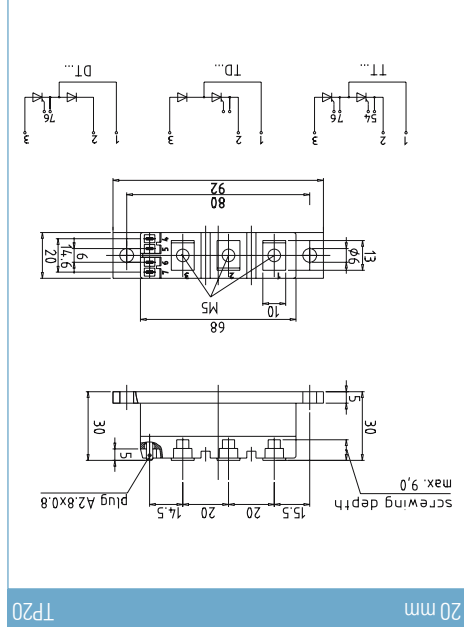


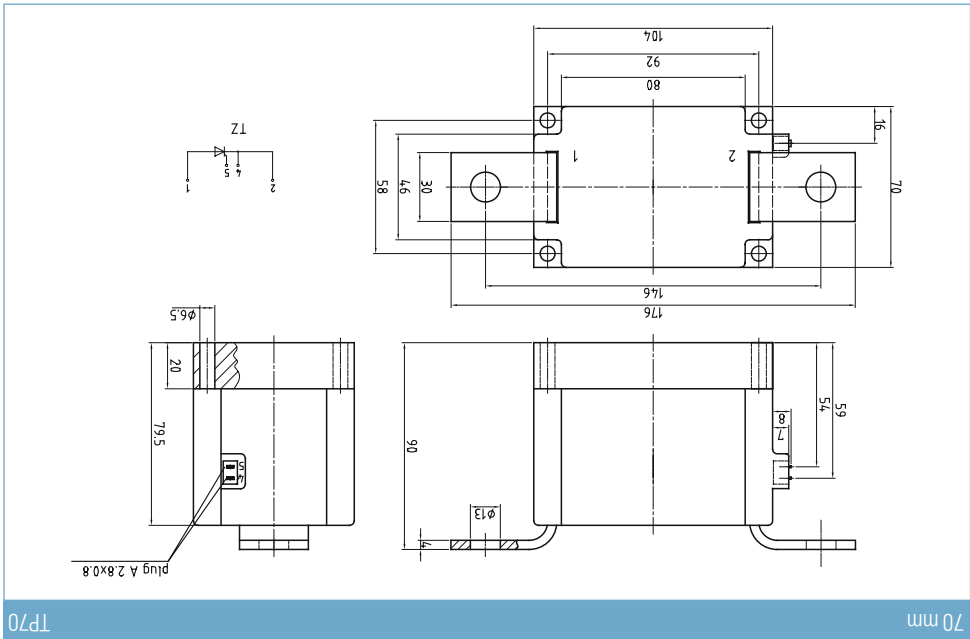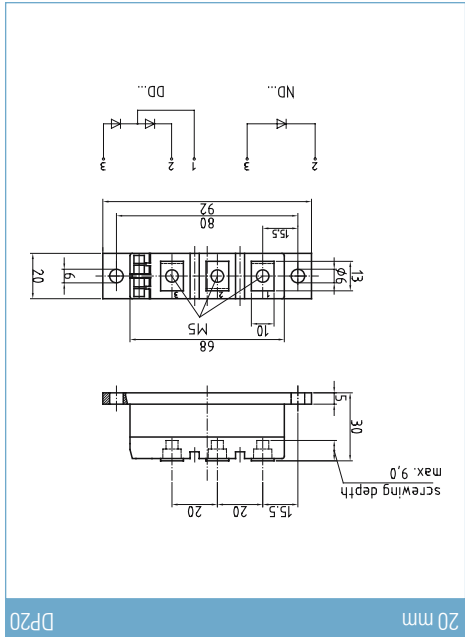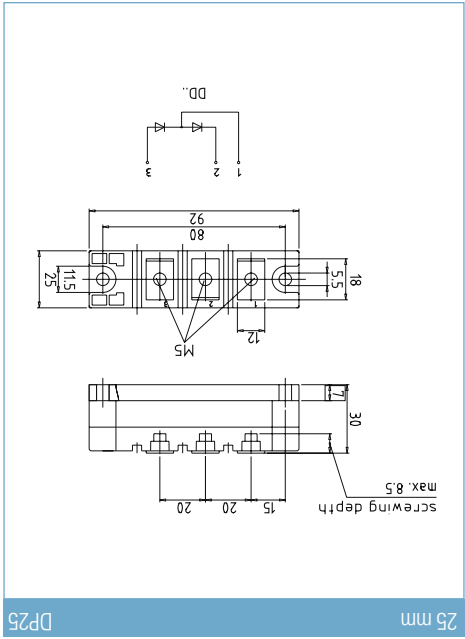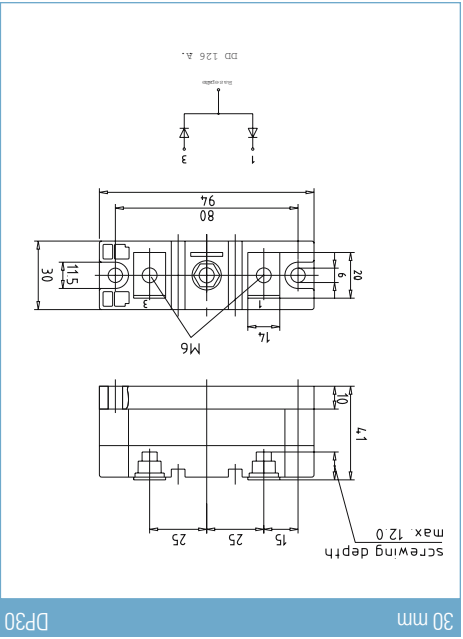

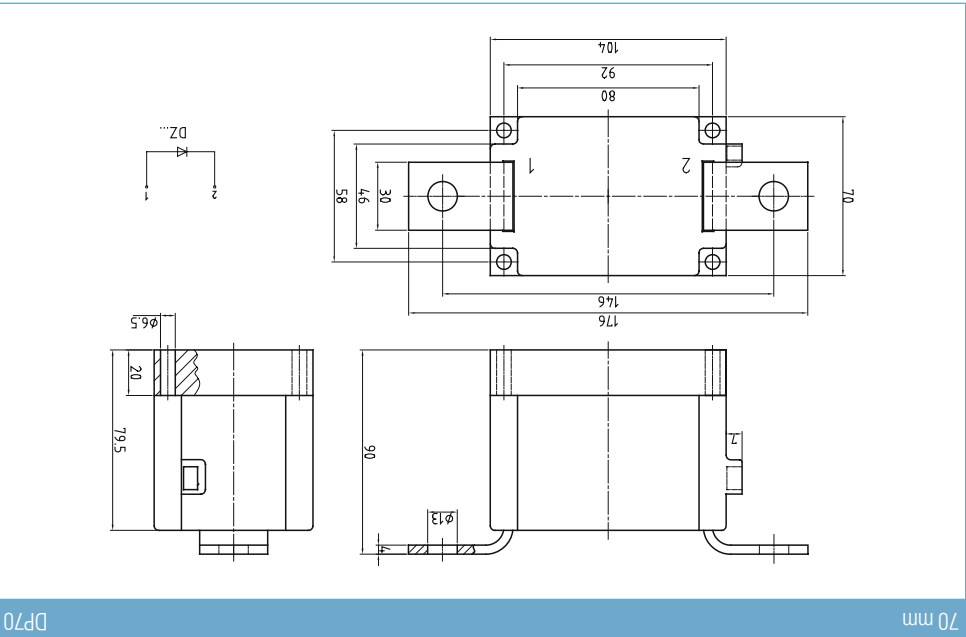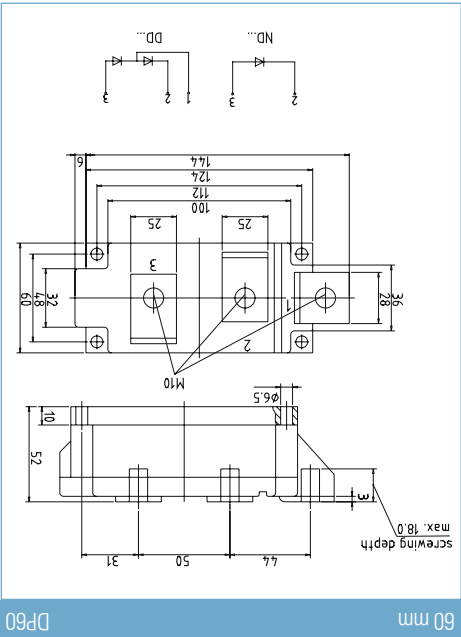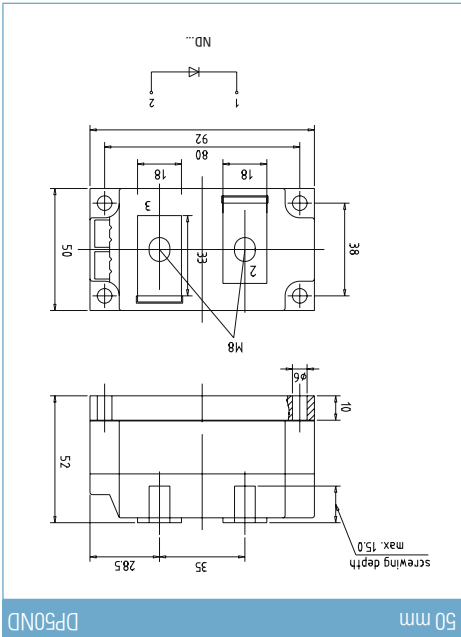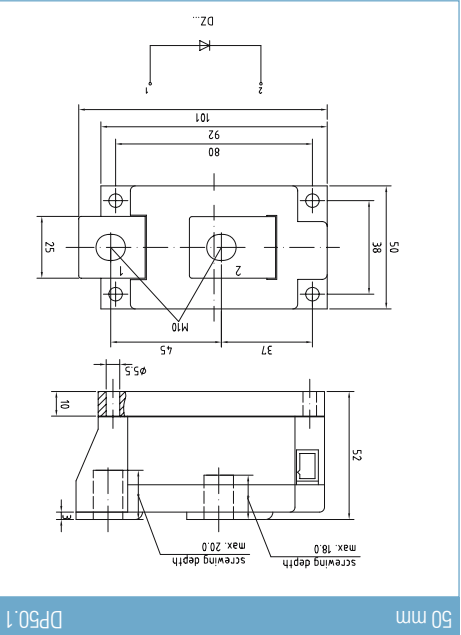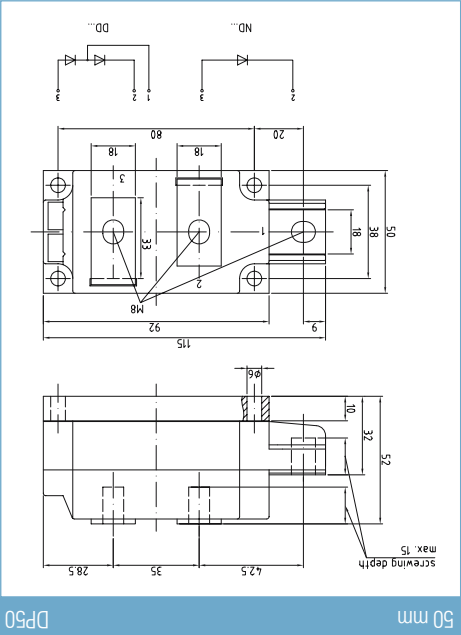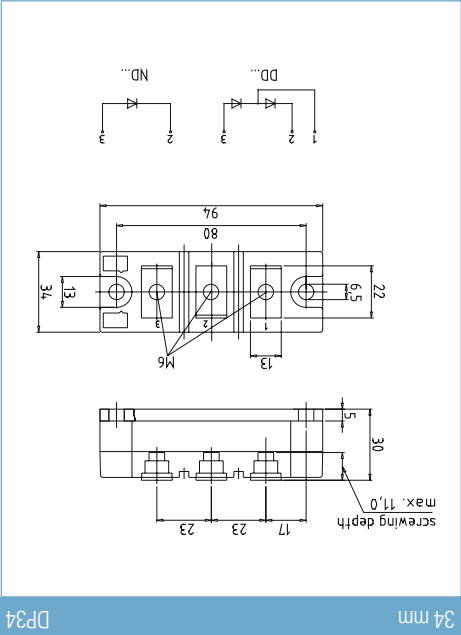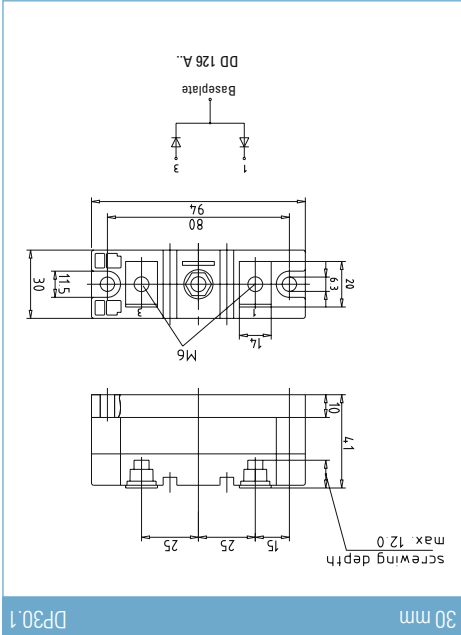


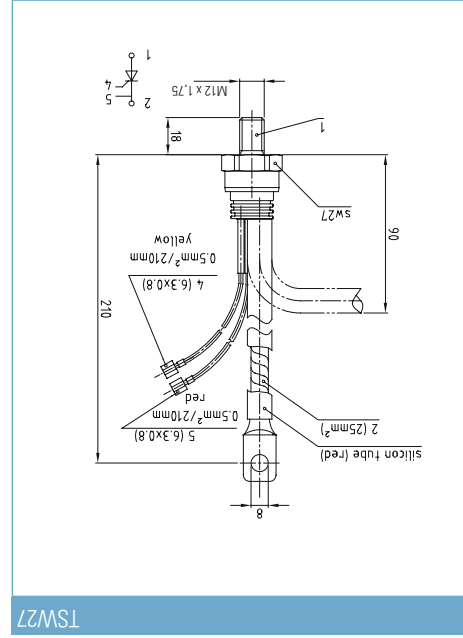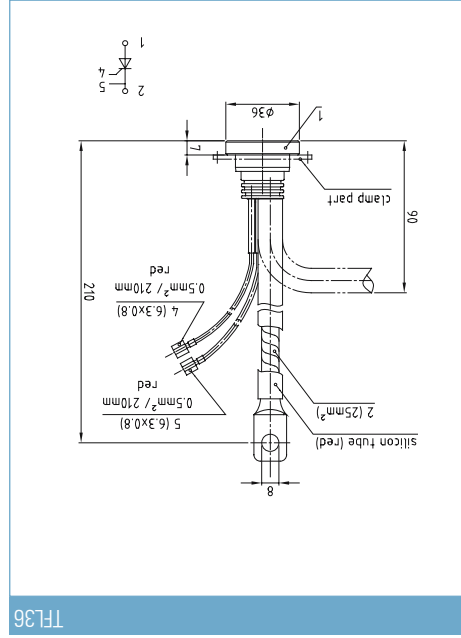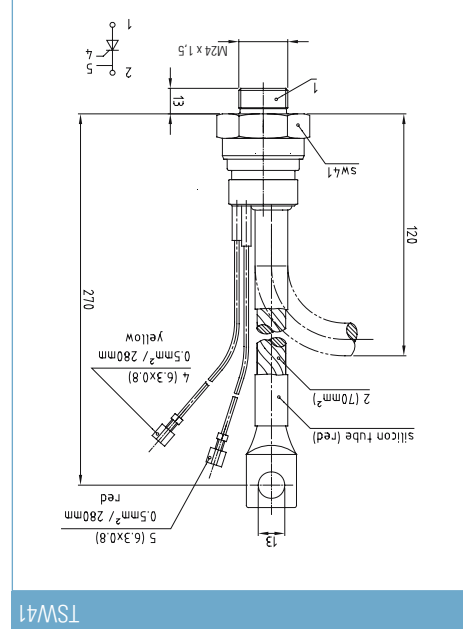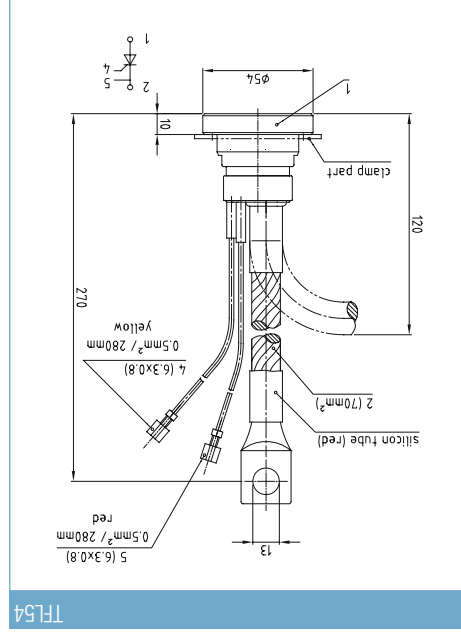


X) = evacuation pipe




T157.26

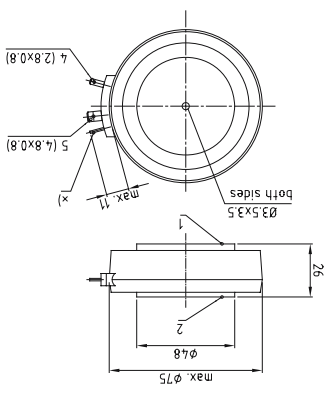


T175.26

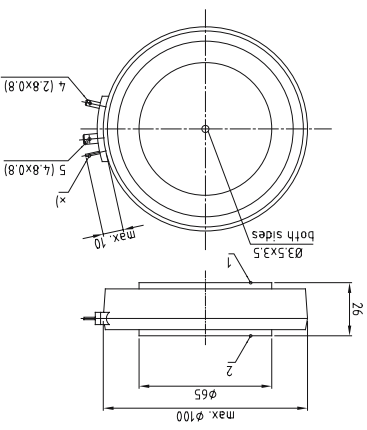


T1100.26

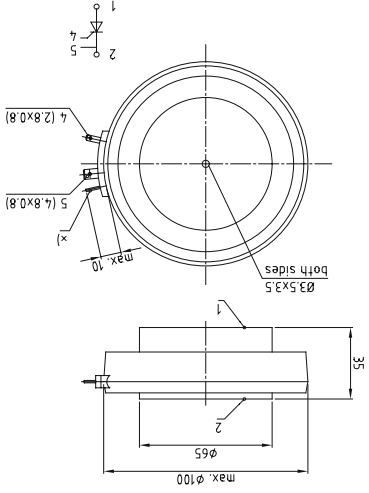


T1100.35




T141.14



T150.14



T160.14

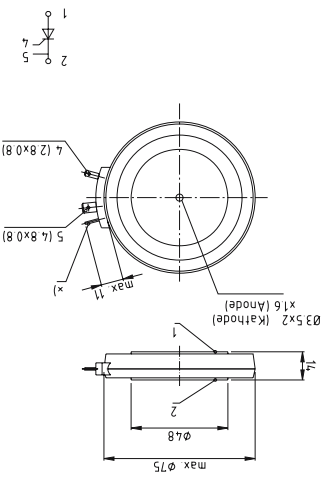

T175.14

IGBT

SCR/Diode Modules

Presspacks


Stacks

Outlines


Accessories

Explanations




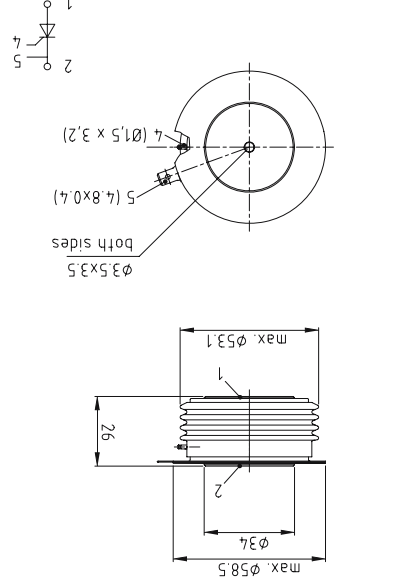


T158.26K0

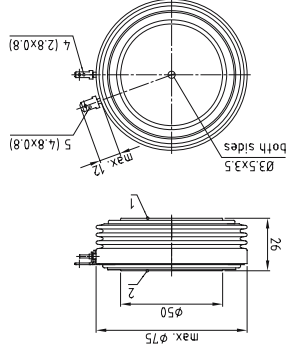


T175.26K

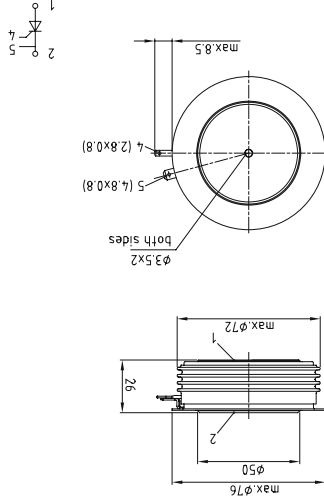


T176.26K

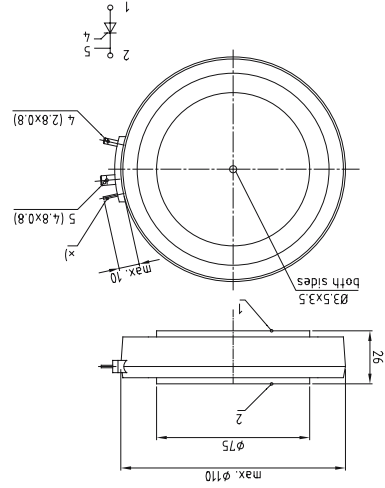


T1110.26

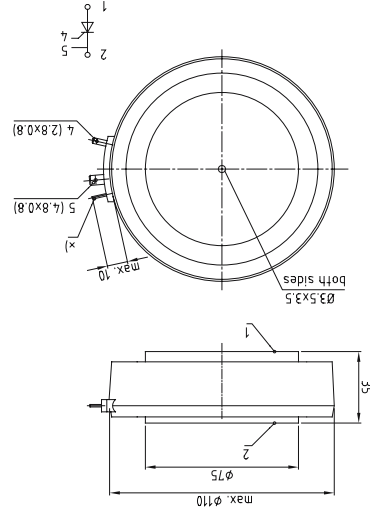


T1110.35

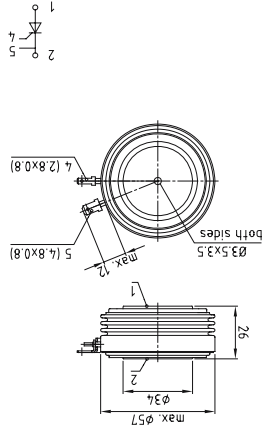



T157.26K












T176.26K0

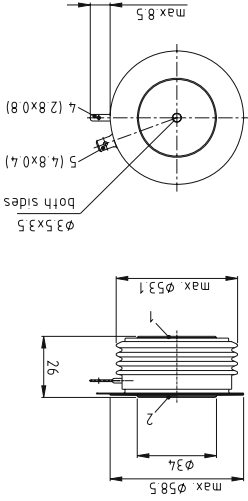


T158.26K

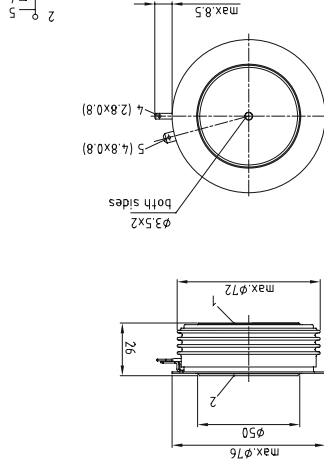

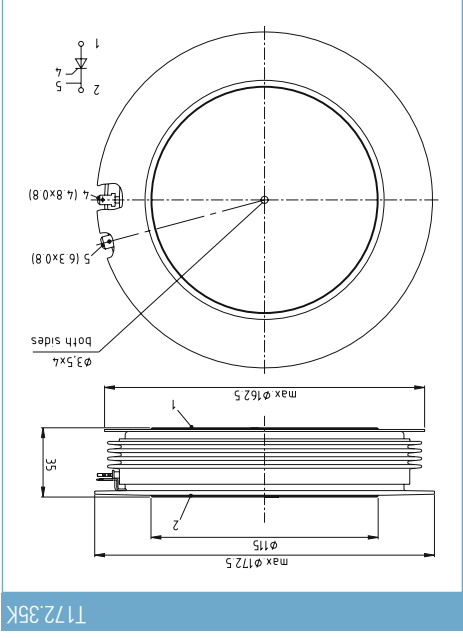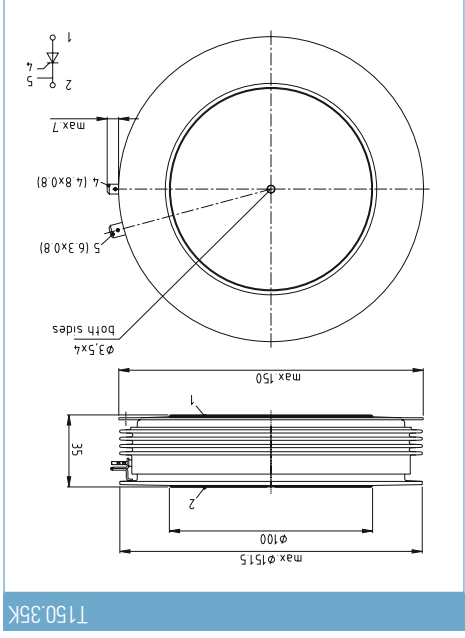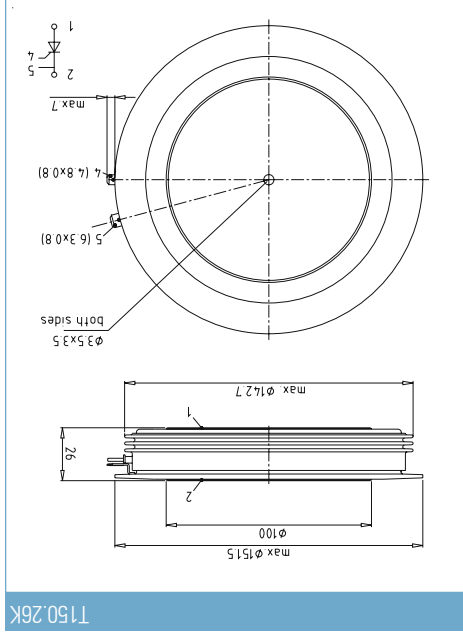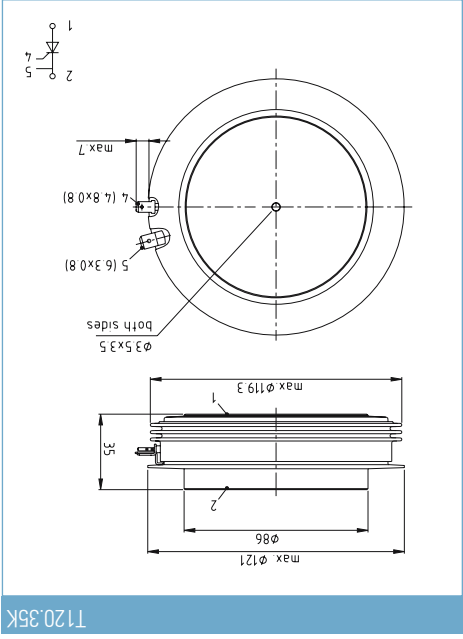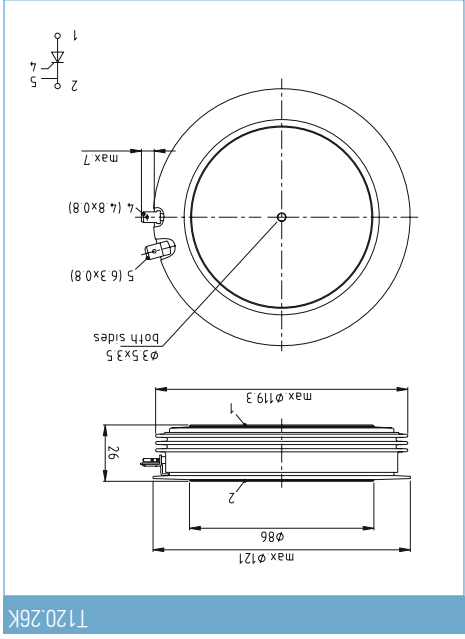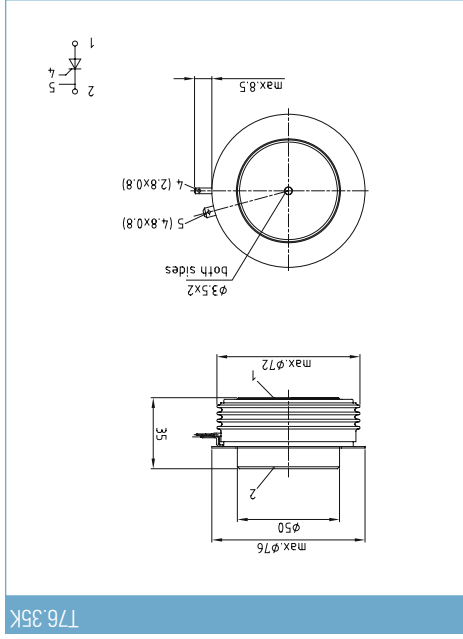

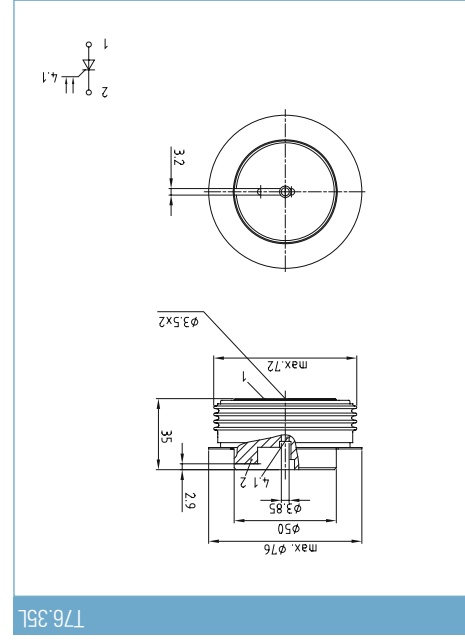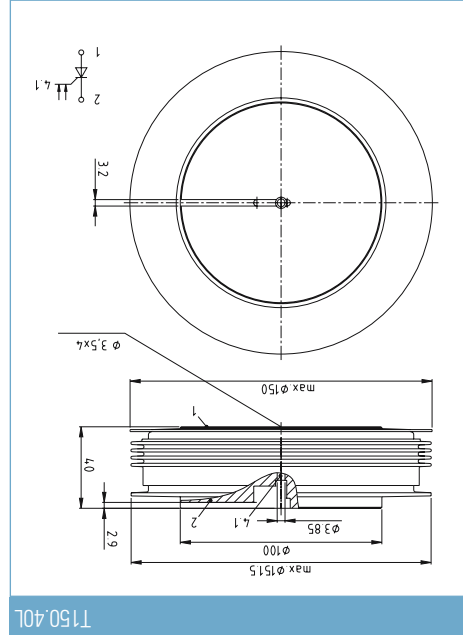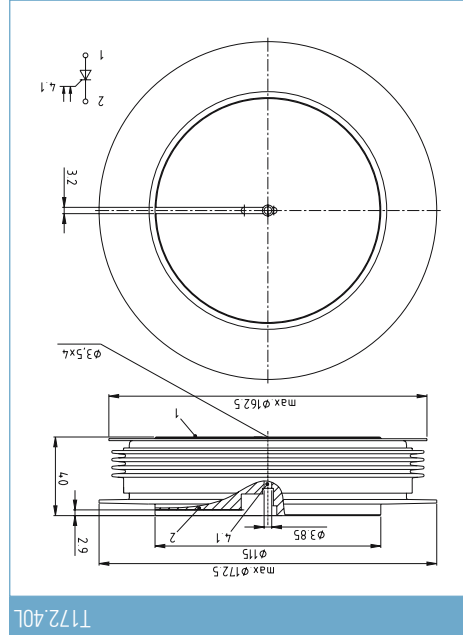


type	symbol	cathode	anode	prot. flex. tubing
N, S				
K, U				
case (1)	rope (2)	case (1)	red	blue

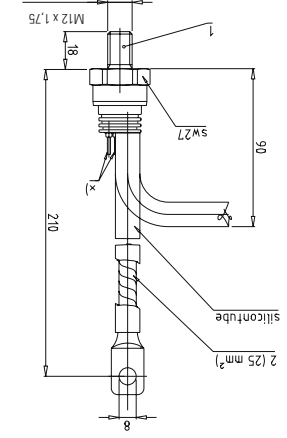


DSW27

type	symbol	cathode	anode
N, S			
K, U			
case (1)	connection	case (1)	pin




DSW27.1

type	symbol	cathode	anode
N, S, A			
K, U, B			
case (1)	connection	case (1)	pin (2)




DSW27.2

type	symbol	cathode	anode	prot. flex. tubing
N, S				
K, U				
case (1)	rope (2)	case (1)	red	blue

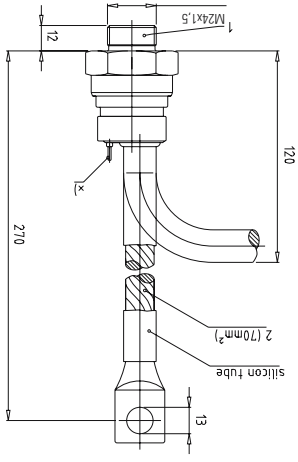


DSW41

type	symbol	cathode	anode	prot. flex. tubing
N, S				
K, U				
case (1)	rope (2)	case (1)	red	blue

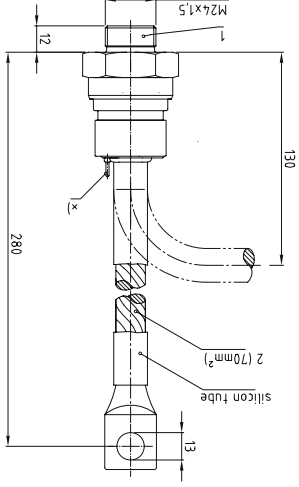

DSW41.1


type	symbol	cathode	anode	prot. flex. tubing
N, S				
K, U				
case (1)	rope (2)	case (1)	red	blue

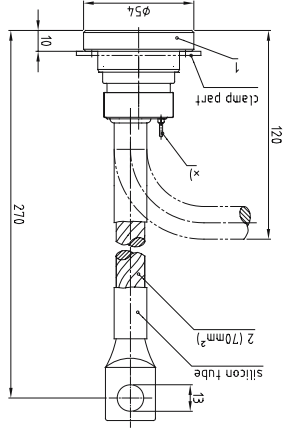

DFL54


X) = evacuation pipe

type	symbol	cathode	anode	prot. flex. tubing
N, S				
K, U				
case (1)	rope (2)	case (1)	red	blue

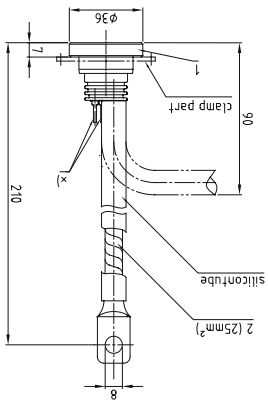


DFL36


X) = evacuation pipe

1  
2


D60.14

1  
2


D73.8

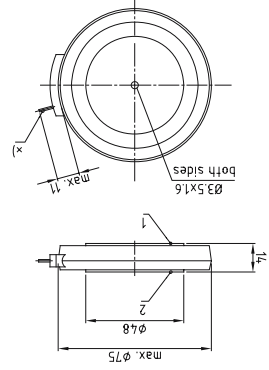1  
2


D75.14

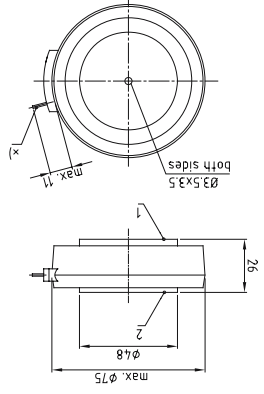1  
2


D75.26

1  
2


D41.14

1  
2


D50.14

1  
2


D57.26

1  
2


D60.8

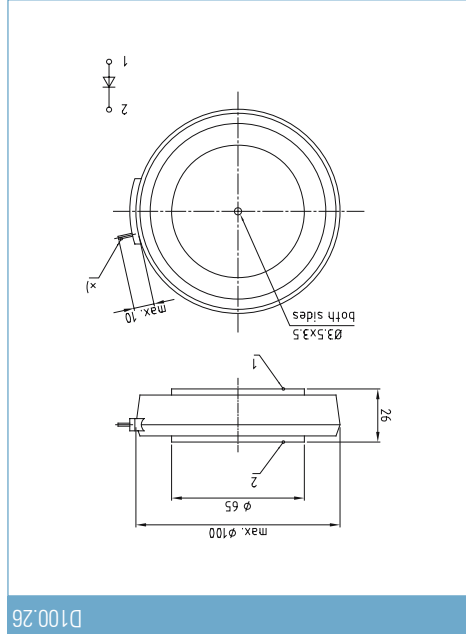


D100.26

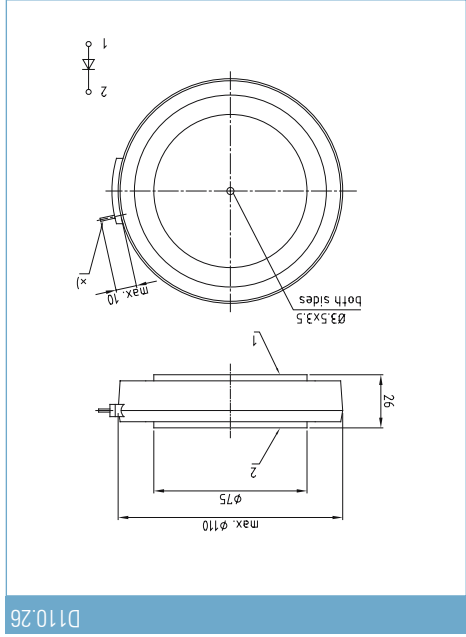


D110.26

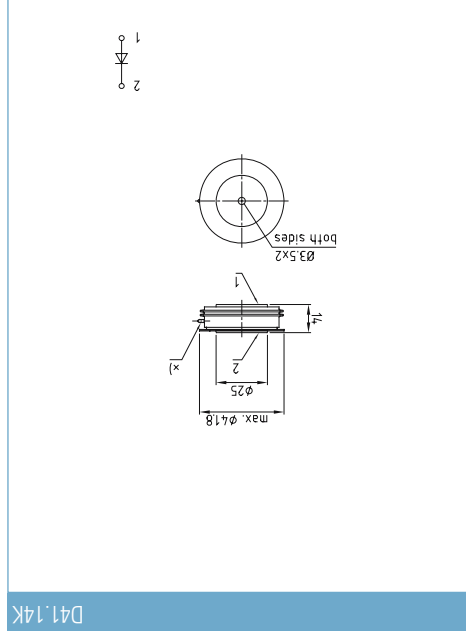


D41.14K

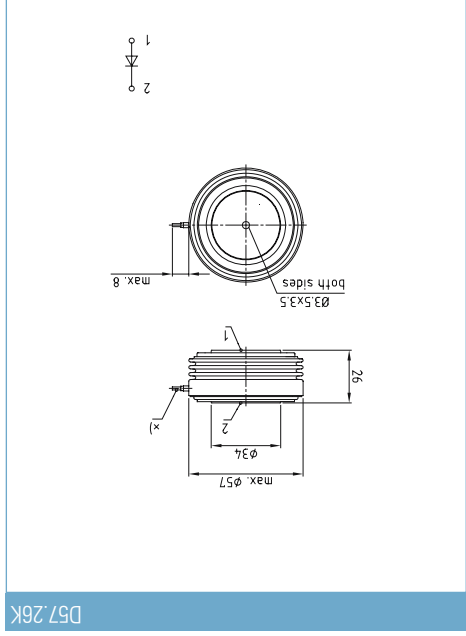

D57.26K

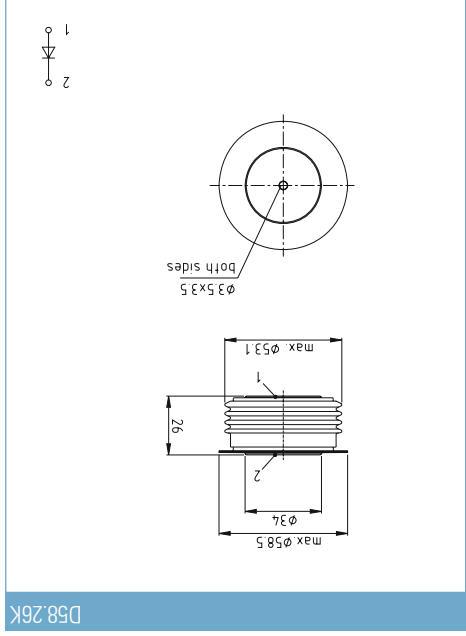







D58.26K

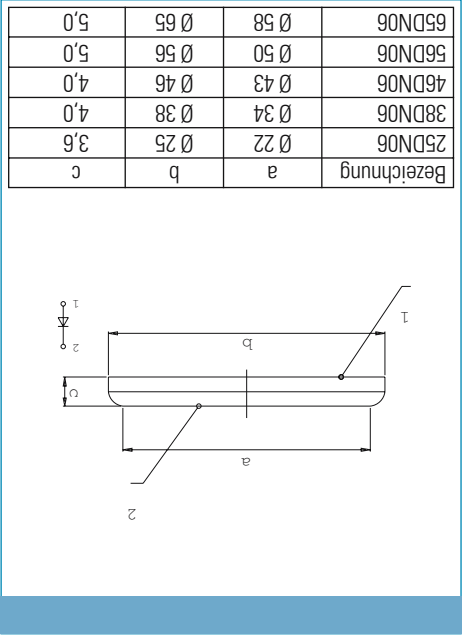


D75.26K

X) = evacuation pipe


Bezeichnung	a	b	c
25DN06	Ø 22	Ø 25	3,6
38DN06	Ø 34	Ø 38	4,0
46DN06	Ø 43	Ø 46	4,0
56DN06	Ø 50	Ø 56	5,0
65DN06	Ø 58	Ø 65	5,0

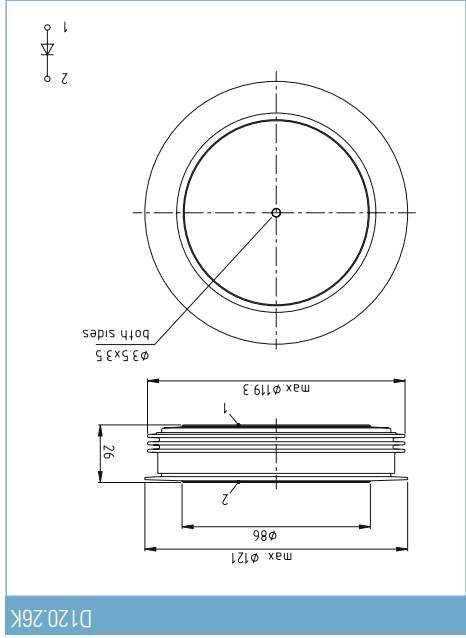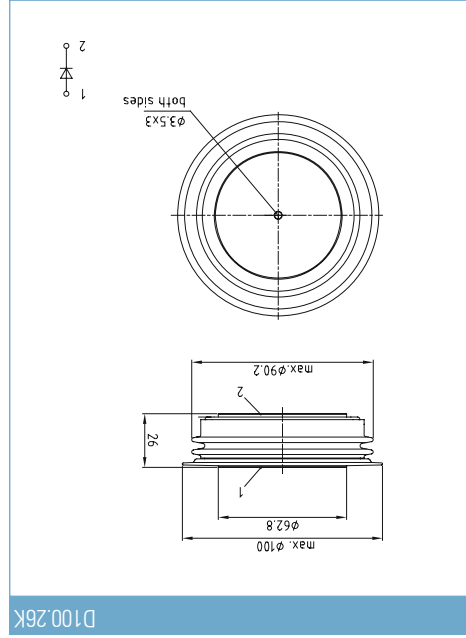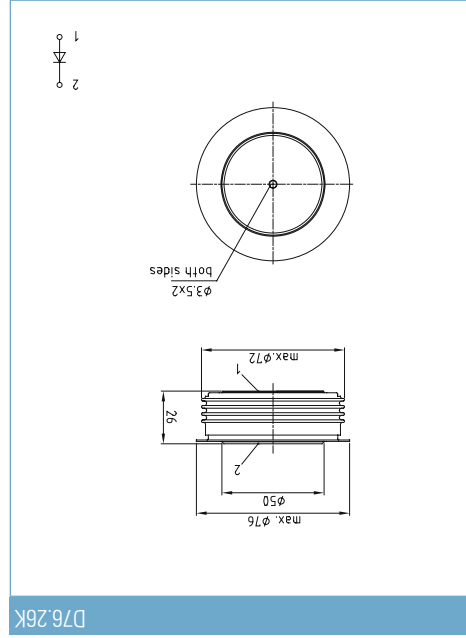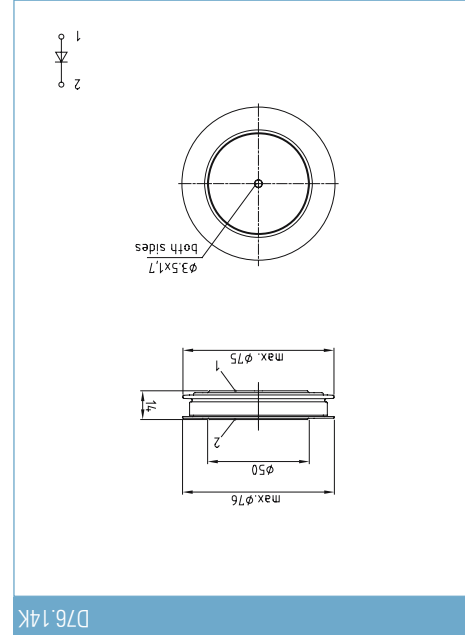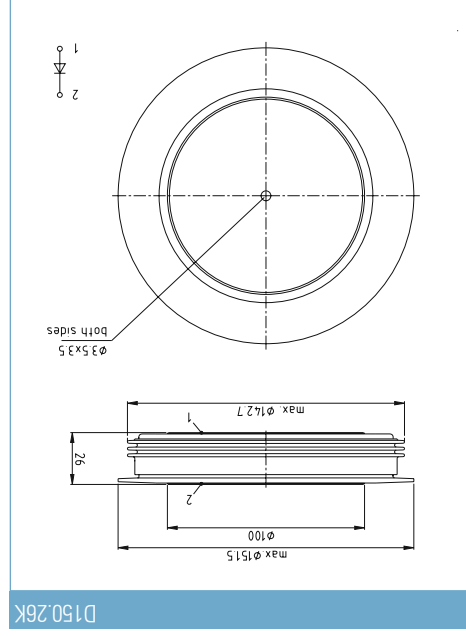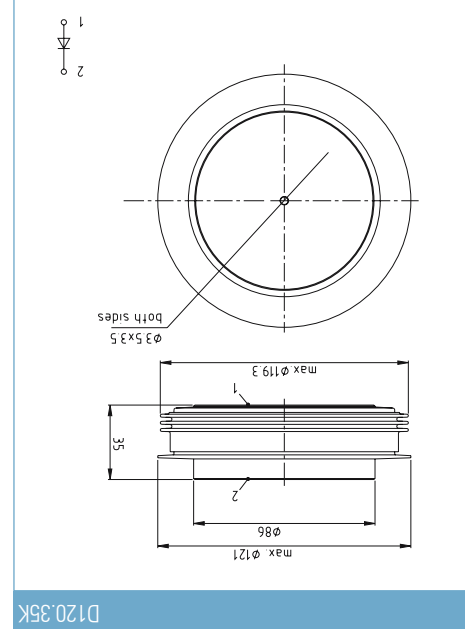


X) = evacuation pipe




157.26

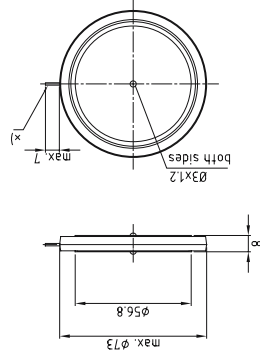

172.8

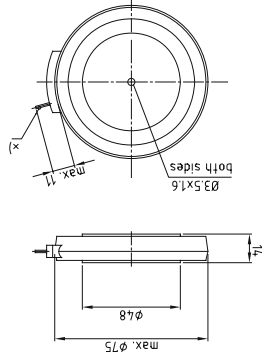

175.14

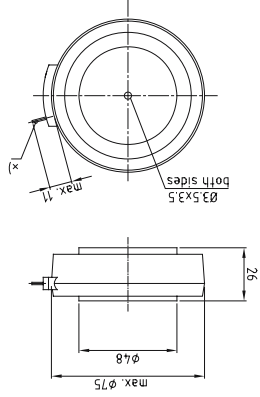

175.26

120

Explanations

Accessories

Outlines





Stacks

Presspacks

SCR/Diode Modules

IGBT



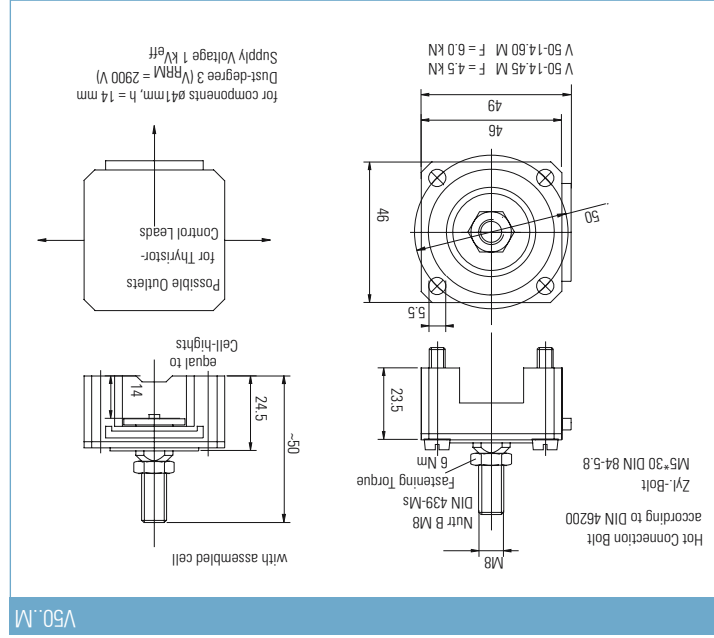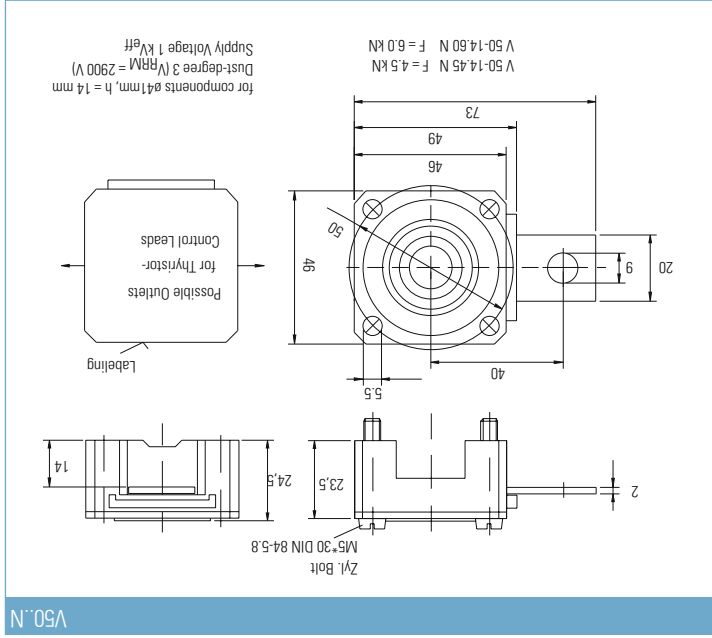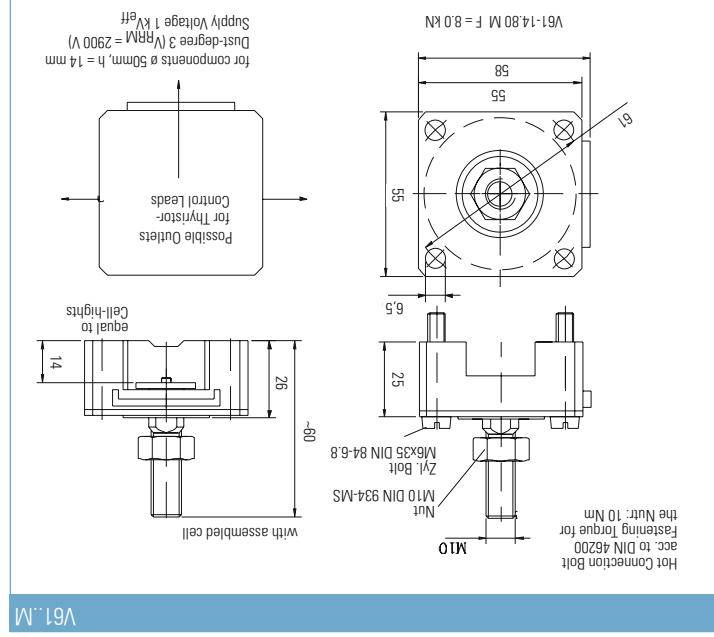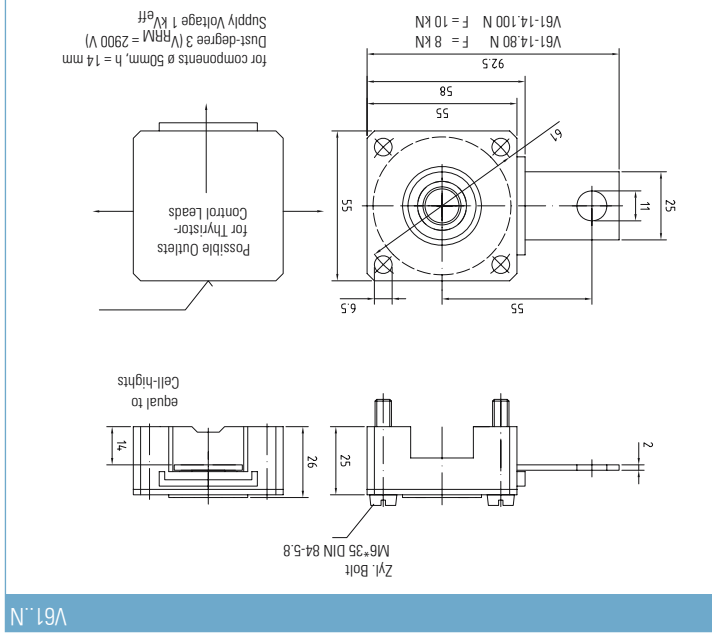

**V 72**

for components  $\phi 8\text{mm}$ ,  $h = 14/26\text{ mm}$   
 Dust-degree 3 (VRM = 4000/5000 V)  
 Supply Voltage 1,4/1,8 kV<sub>eff</sub>

Clamping device	a	b	c	d	e	f	F	U <sub>eff</sub>
V72-14,150M	14	45	68	49	32	36	40,5	15 kN 1400V
V72-26,150M	26	60	80	61	44	48	52,5	15 kN 1800V
V72-26,80 M	26	60	80	61	44	48	52,5	8 kN 1800V
V72-26,120M	26	60	80	61	44	48	52,5	12 kN 1800V
V72-26,120MS	26	60	80	61	44	49	53,5	12 kN 2100V

**V 176**

mounting instructions:  
 - part are to be centered  
 - the clamping plate must be fixed equally with 4 Bolts M12 - 8.8 (not included) until the washer is unright up to a gap of 0.2 mm.  
 - glue unrightened washer to avoid noises  
 - Dust-degree 3  
 For max. 2,5 kV<sub>eff</sub> applications  
 For higher voltage on request  
 For components D = 75 mm




Type	Mat.-No.	clamping force L
V176-35,650N	19610	65KN 57.5
V176-35,500N	19611	50KN 58.5
V176-35,400N	19612	40KN 59.5

**V 89**


mounting instructions:  
 - part are to be centered  
 - the clamping plate must be fixed equally with 4 Bolts M10 - 8.8 (not included) until the washer is unright up to a gap of 0.2 mm.  
 - glue unrightened washer to avoid noises  
 - Dust-degree 3  
 For max. 2 kV<sub>eff</sub> applications  
 For higher voltage on request  
 For components D = 75 mm

Type	Mat.-No.	clamping force L
V89-26,400N	6921	40KN 38
V89-26,300N	3586	30KN 39
V89-26,170N	12784	17KN 40

**V 100**

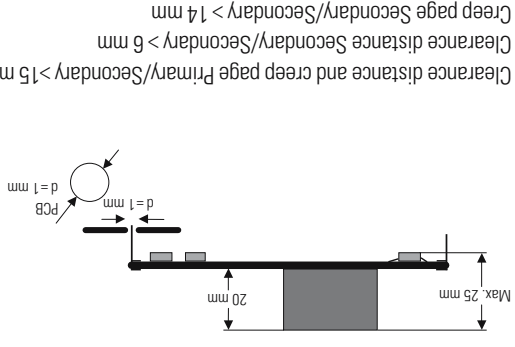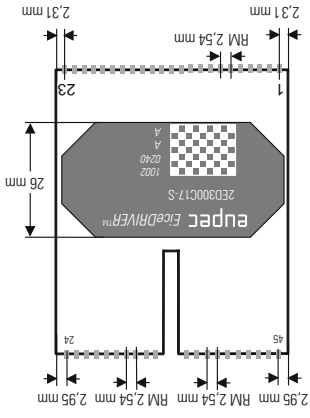


Clearance distance and creep page Primary/Secondary > 15 mm  
 Clearance distance Secondary/Secondary > 6 mm  
 Creep page Secondary/Secondary > 14 mm

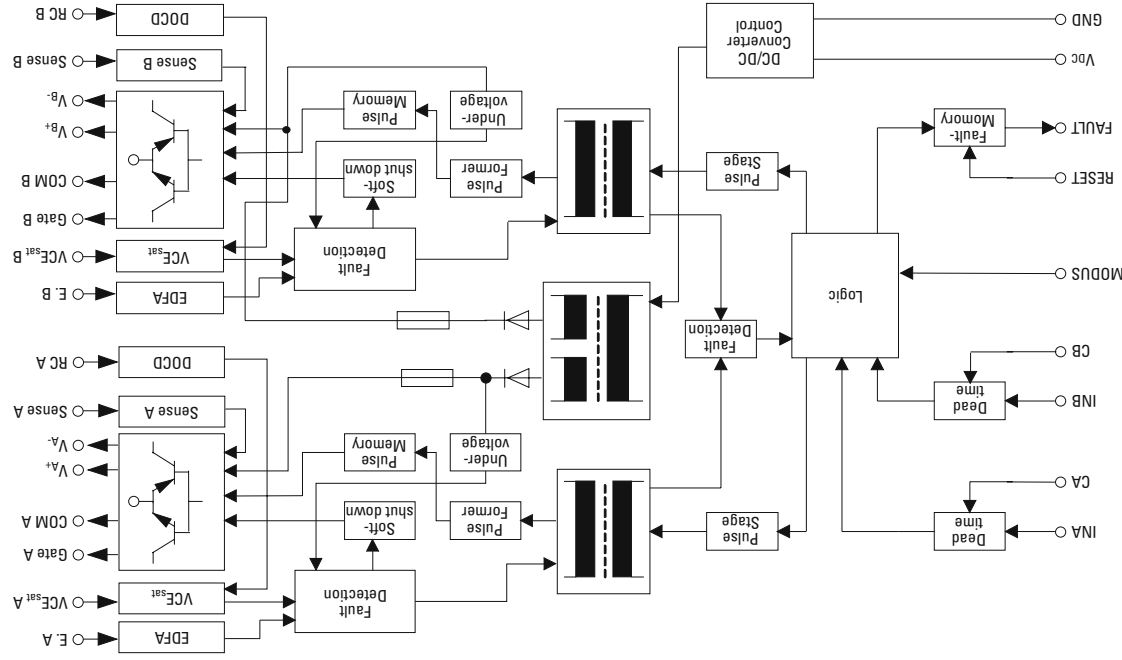


2ED300C17-S / 2ED300C17-ST

IGBT DRIVER™




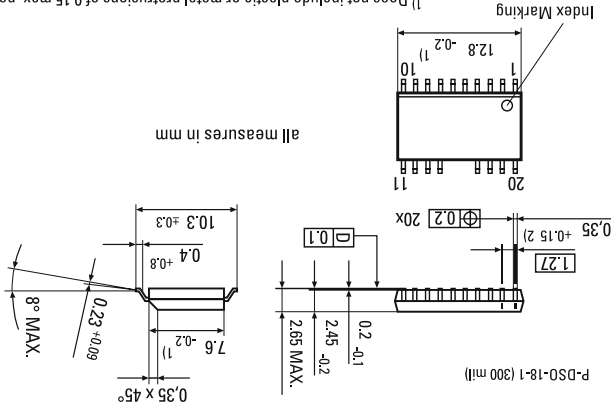


P-DSO-18-1 (300 mil)

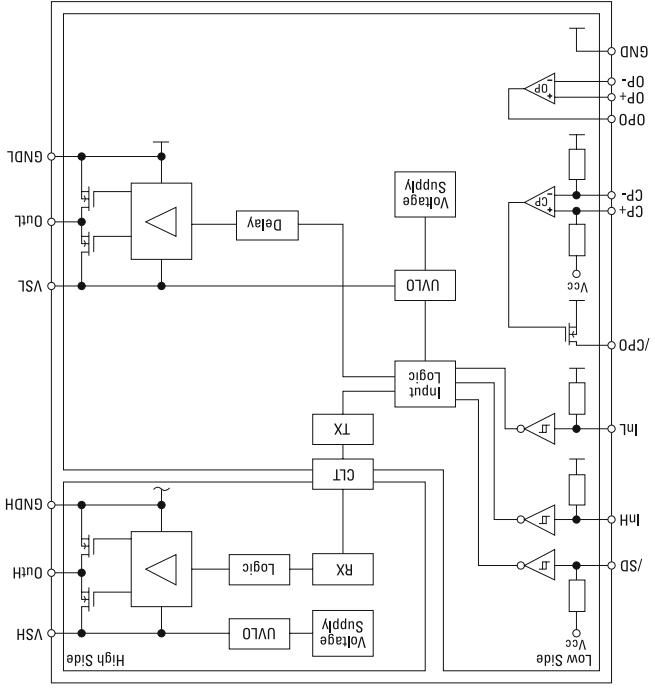



2ED020112-F

IGBT DRIVER™

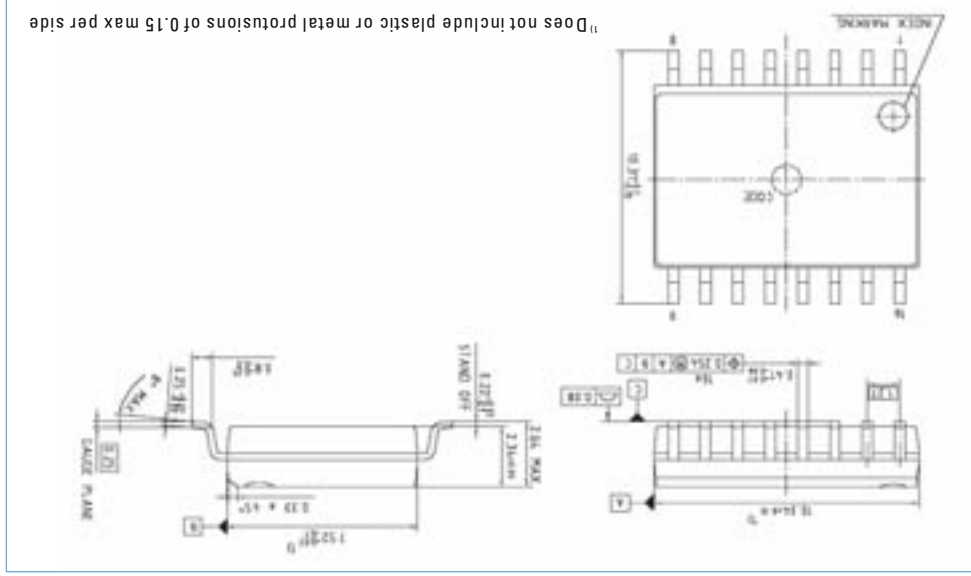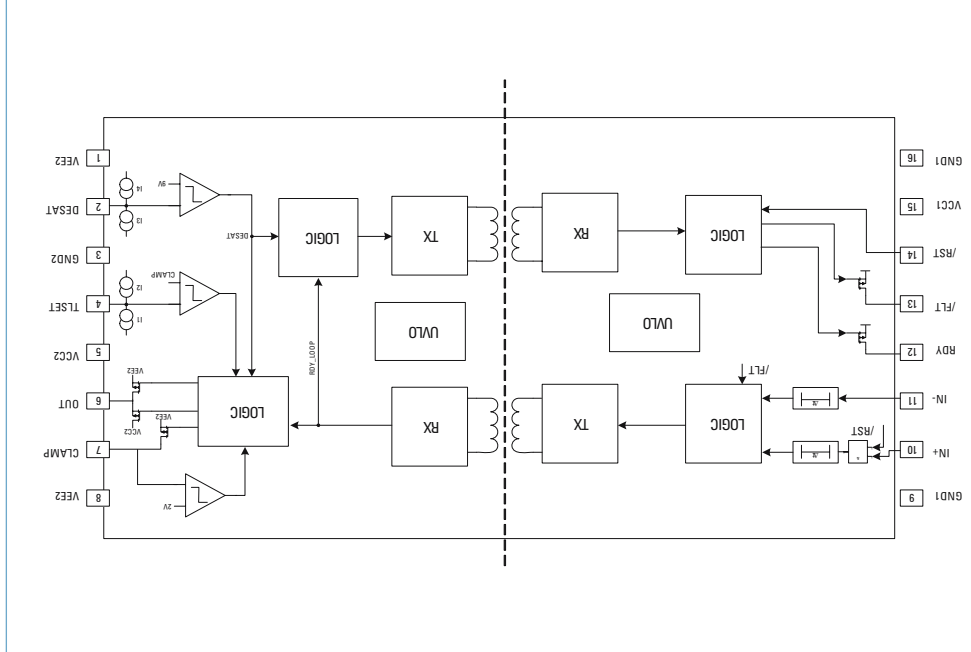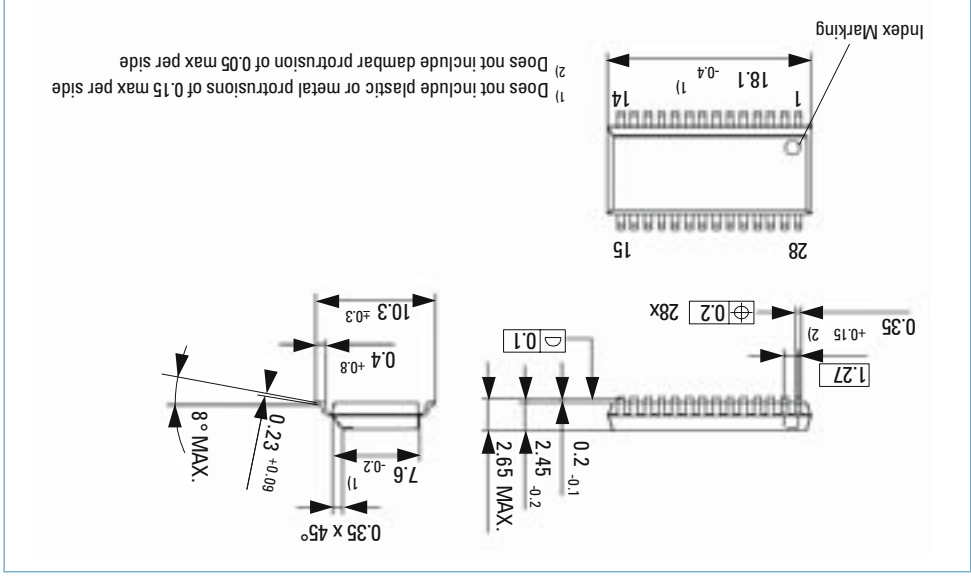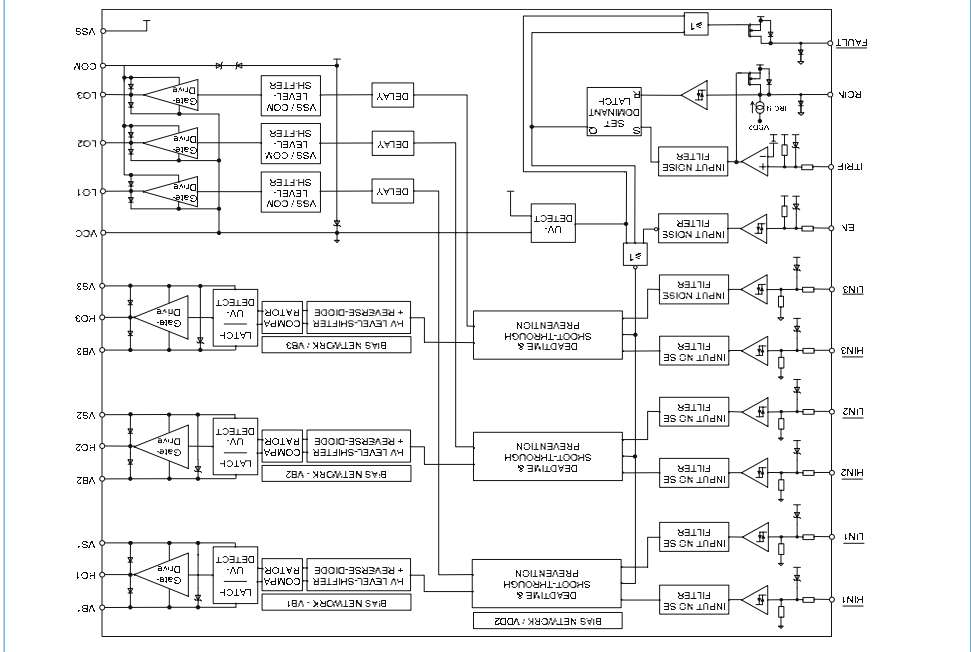


# Mounting Hardware for EasyPIM™, EasyPACK, EasyBRIDGE and EasyDUAL Modules


Suitable for	Type	Outline	Part-No.
Easy750 housing	ScrewClamp Easy750	SC750	24126
Easy750housing	IsolationCap Easy750	IC750	27332
Easy1 housing	ScrewClamp Easy1	SC1	23088
Easy2 housing	ScrewClamp Easy2	SC2	23089

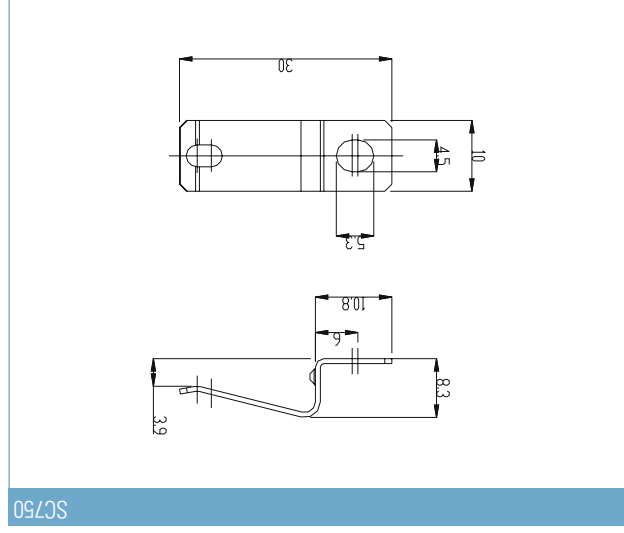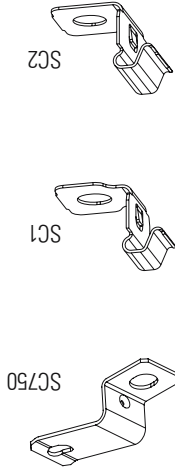


SC750

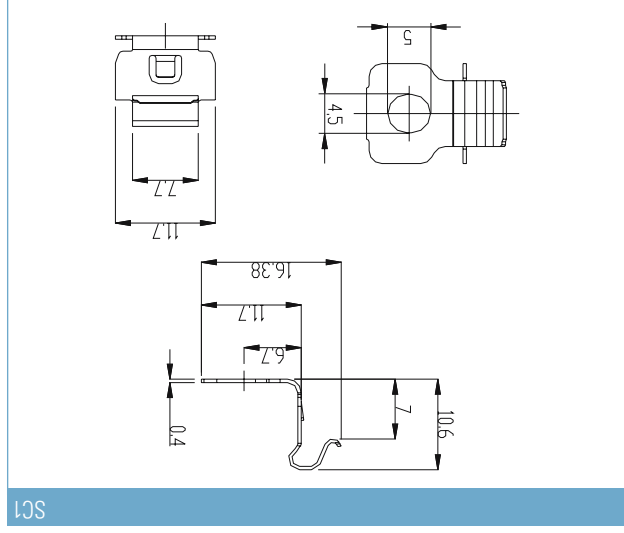

SC1

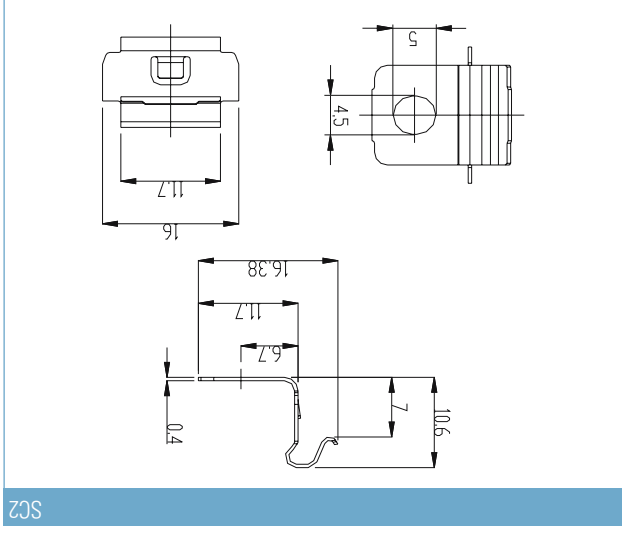

SC2

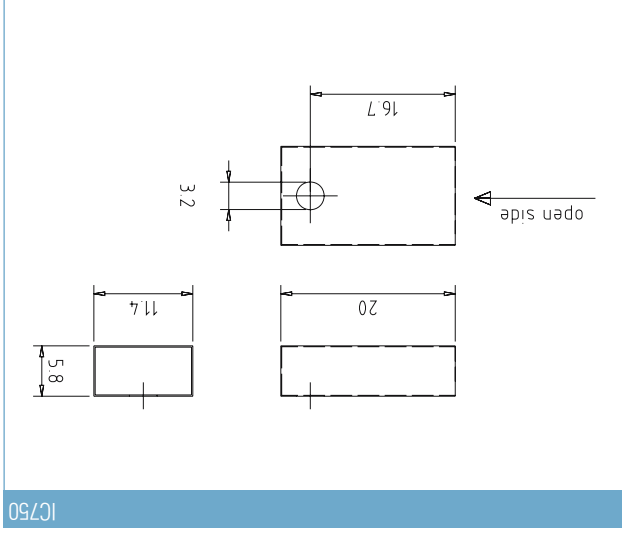


IC750

# Gate Leads for PowerBLOCK Thyristor Modules

Gate leads must be ordered separately

lead material: silicon cord type Siff 0,5mm<sup>2</sup>

Baseplate	connection to	connection to	color	length [mm]	Part.no	Outline
30 mm	5 / 4	G1/HK1	G yellow / HK red	250	28118	LZ 5
	6 / 7	G2/HK2	G yellow / HK red	250	28119	LZ 6
34, 50, 60 mm	5 / 4	G1/K1	G yellow / HK red	250	28128	LZ 5
	6 / 7	G2/K2	G yellow / HK red	250	28129	LZ 6
50 mm Single	5 / 4	G1/K1	G yellow / HK red	250	28128	LZ 5
	5 / 4	G2/K2	G yellow / HK red	250	28129	LZ 6
70 mm	5 / 4	G2/K2	G yellow / HK red	250	28129	LZ 6
34, 50, 60 mm	5 / 4	G1/K1	G yellow / HK red	470	28133	LZ 5
	6 / 7	G2/K2	G yellow / HK red	470	28134	LZ 6
50 mm Single	5 / 4	G1/K1	G yellow / HK red	470	28133	LZ 5
	5 / 4	G2/K2	G yellow / HK red	470	28134	LZ 6
70 mm	5 / 4	G2/K2	G yellow / HK red	470	28134	LZ 6

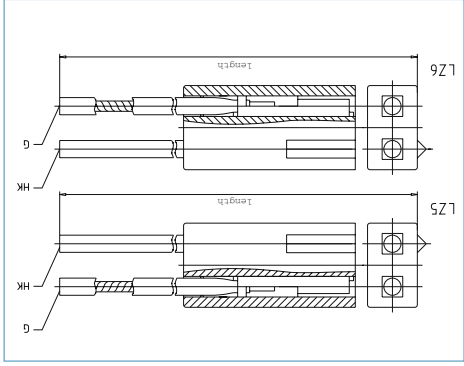

# Standard Gate Leads for Disc Type Devices

Leads and gate leads must be ordered separately

Disc outline/page	Material	Mat. no.	Connection	Color	Length mm
T41.14/103	epoxy	2385	HK	red	235 (1)
T50.14/103		2386	G	yellow	235
T60.14/103	epoxy	2387	HK	red	235 (1)
T75.14/103		2386	G	yellow	235
T57.26/103					
T75.26/103					
T100.26/103					
T100.35/103					
T110.26/104					
T110.35/104					
T60.14/103	epoxy	12511	HK	red	600 (2)
T75.14/103		12510	G	yellow	600
T57.26/103					
T75.26/103					
T100.26/103					
T100.35/103					
T110.26/104					
T110.35/104					
T57.26K/104	ceramic	2387	HK	red	235 (1)
T58.26K/104		2386	G	yellow	235
T75.26K/104					
T76.26K/104					
T76.35K/104					
T57.26K/104	ceramic	12511	HK	red	600 (2)
T58.26K/104		12510	G	yellow	600
T75.26K/104					
T76.26K/104					
T76.35K/104					
T120.26K/105	ceramic	14232	HK	red	1000 (2)
T120.35K/105		14231	G	white	1000
T150.26K/105					
T150.35K/105					
T172.35K/105					

1) with plug 6,3 x 1 mm at the free ends – lead material: silicon cord type SIFF 0,5 mm<sup>2</sup>  
 2) without plug at the free ends – lead material: teflon cord type FEP 0,5 mm<sup>2</sup>

### Clamping Force (kN) and Disc Diameter (mm)

Typ	kN	mm	Typ	kN	mm	Typ	kN	mm	Typ	kN	mm
Phase control thyristors			Phase control thyristors			Phase control thyristors			Phase control thyristors		
T 178 N	2,5 - 5	41	T 2001 N	36 - 52	120	T 730 N	18 - 43	75	T 1789 N	75	18 - 43
T 201 N	7 - 12	58	T 2009 N	36 - 52	110	T 731 N	15 - 24	75	T 1986 N	57	9 - 18
T 218 N	2,5 - 5	41	T 2156 N	42 - 95	110	T 739 N	15 - 24	75	T 1971 N	60	9 - 18
T 281 N	7-12	58	T 2159 N	42 - 95	110	T 828 N	5,5 - 8	50	T 1929 N	75	12 - 29
T 298 N	3 - 6	41	T 2408 N	42 - 95	120	T 829 N	12 - 29	75	T 1901 N/T 2251 N	60	10,5 - 21
T 308 N	5 - 10	50	T 2476 N	42 - 95	110	T 860 N	20 - 45	74	T 1869 N	57	10,5 - 21
T 348 N	2,5 - 5	41	T 2479 N	42 - 95	110	T 869 N	20 - 45	75	T 1866 N	57	10,5 - 21
T 358 N	4 - 8	41	T 2480 N	42 - 95	120	T 878 N	10,5 - 21	60	T 1851 N/T 1651 N	60	10,5 - 21
T 378 N	4 - 8	41	T 2480 N	42 - 95	120	T 879 N	10,5 - 21	75	T 1601 N	57	9 - 18
T 379 N	10,5 - 21	57	T 2480 N	42 - 95	120	T 901 N	15 - 24	75	T 1589 N	50	9 - 18
T 380 N	7,5 - 17,5	56	T 2480 N	42 - 95	120	T 909 N	15 - 24	75	T 1551 N	57	9 - 18
T 388 N	5 - 10	50	T 2509 N	24 - 56	75	T 929 N	20 - 45	75	T 1509 N	57	6 - 12
T 398 N	3 - 6	41	T 2563 N/T 2563 NH	90 - 130	170	T 1039 N	16 - 32	75	T 1503 N/T 1503 NH	50	6 - 12
T 399 N	7,5 - 17,5	57	T 2709 N	42 - 95	110	T 1049 N	12 - 24	75	T 1500 N	57	6 - 12
T 458 N	7,5 - 17,5	60	T 2710 N	42 - 95	120	T 1078 N	8 - 16	50	T 1451 N	50	6 - 12
T 459 N	7,5 - 17,5	57	T 2851 N/T 3441 N	63 - 91	150	T 1081 N	36 - 52	120	T 1401 N	75	15-24
T 501 N	15 - 24	75	T 3101 N	63 - 91	120	T 1189 N	16 - 32	75	T 1329 N	41	4 - 8
T 509 N	5 - 10	57	T 3159 N	42 - 95	110	T 1218 N	20 - 45	75	T 1258 N	75	15 - 24
T 551 N	15 - 24	75	T 3401 N/T 3801 N	63 - 91	150	T 1219 N	20 - 45	75	T 1219 N	75	15 - 24
T 553 N	15 - 24	75	T 3441 N	63 - 91	150	T 1219 N	20 - 45	75	T 1219 N	75	15 - 24
T 568 N	4 - 8	41	T 3709 N	30 - 65	100	T 1329 N	20 - 45	75	T 1401 N	75	15-24
T 571 N	15-24	75	T 3801 N	63 - 91	150	T 1401 N	36 - 52	120	T 1451 N	50	6 - 12
T 588 N	6 - 12	50	T 4021 N	90 - 130	170	T 1451 N	36 - 52	120	T 1500 N	57	6 - 12
T 589 N	6 - 12	57	T 4003 N/T 4003 NH	90 - 130	170	T 1500 N	24 - 56	74	T 1503 N/T 1503 NH	50	6 - 12
T 619 N	6 - 12	57	T 4301 N	63 - 91	150	T 1503 N	63 - 91	150	T 1551 N	57	9 - 18
T 639 N	9 - 18	57	T 4771 N	63 - 91	150	T 1551 N	24 - 56	75	T 1601 N	57	9 - 18
T 648 N	9 - 18	50				T 1589 N	30 - 65	100	T 1651 N	60	10,5 - 21
T 649 N	9 - 18	57				T 1601 N	36 - 52	120	T 1851 N/T 1651 N	60	10,5 - 21
T 658 N	10,5 - 21	60				T 1851 N/T 1651 N	45 - 65	120	T 1866 N	57	10,5 - 21
T 659 N	10,5 - 21	57				T 1866 N	30 - 65	100	T 1869 N	57	10,5 - 21
T 699 N	10,5 - 21	57				T 1869 N	30 - 65	100	T 1901 N/T 2251 N	60	10,5 - 21
T 708 N	10,5 - 21	60				T 1901 N/T 2251 N	63 - 91	150	T 1929 N	75	12 - 29
T 709 N	12 - 29	75				T 1929 N	42 - 95	110	T 1971 N	60	9 - 18
T 718 N	9 - 18	60				T 1971 N	36 - 52	120	T 1986 N	57	9 - 18
T 719 N	9 - 18	57				T 1986 N	30 - 65	100	T 1989 N	75	18 - 43
T 729 N	18 - 43	75				T 1989 N	30 - 65	100			

Fast thyristors  
Typ  
kN  
mm

Phase control thyristors  
Typ  
kN  
mm

Phase control thyristors  
Typ  
kN  
mm

Phase control thyristors  
Typ  
kN  
mm



## Clamping Force (kN) and Disc Diameter (mm)

Rectifier diodes		Rectifier diodes		Fast rectifier diodes		Fast rectifier diodes	
Typ	kN	Typ	kN	Typ	kN	Typ	kN
mm		mm		mm		mm	
D 269 N	3,2 - 7,6	D 6247 N	30 - 45	D 138 S	1,7 - 3,4	D 1408 S	18 - 50
D 428 N	3,2 - 7,6	D 8019 N	40 - 80	D 178 S	1,7 - 3,4	D 1461 S	27 - 45
D 448 N	2,6 - 4,6	D 8407 N	40 - 60	D 188 S	1,7 - 3,4	D 1951 SH	55 - 91
D 471 N	10 - 16			D 228 S	3,2 - 7,6	D 1961SH	36-52
D 660 N	6,1 - 14,7			D 238 S	3,2 - 7,6		120
D 711 N	10 - 16			D 291 S	9 - 13		
D 748 N	6,1 - 14,7	25 DN 06	4 - 8	D 348 S	3,2 - 7,6		
D 749 N	10 - 24	38 DN 06	20 - 30	D 358 S	3,2 - 7,6		
D 758 N	3,2 - 7,6	46 DN 06	30 - 45	D 368 S	3,2 - 7,6		
D 798 N	6 - 14,7	56 DN 06	40 - 60	D 371 S	10 - 16		
D 849 N	10 - 24	65 DN 06	55 - 80	D 438 S	4,8 - 11,4		
D 850 N	10 - 24			D 440 S	4,8 - 11,4		
D 1029 N	10 - 24			D 509 S	6 - 14,5		
D 1030 N	10 - 24			D 648 S	6 - 14,5		
D 1049 N	10 - 24			D 649 S	6 - 14,5		
D 1069 N	14 - 34			D 658 S	6 - 14,5		
D 1481 N	15 - 36			D 659 S	6 - 14,5		
D 1709 N	12 - 24			D 675 S	10 - 24		
D 1800 N	24 - 60			D 689 S	10 - 24		
D 1809 N	24 - 60			D 690 S	10 - 24		
D 2200 N	24 - 60			D 721 S	15 - 36		
D 2209 N	24 - 60			D 801 S	15 - 36		
D 2228 N	12 - 24			D 841 S	15 - 36		
D 2601 N/D2601 NH	36 - 52			D 901 S	27 - 45		
D 2650 N	24 - 60			D 911 SH	27 - 45		
D 2659 N	24 - 60			D 921 S	27 - 45		
D 2898 N	12 - 24			D 931 SH	27 - 45		
D 3001 N/D3041 N	36 - 52			D 1031 SH	27 - 45		
D 3501 N	36 - 52			D 1131 SH	36 - 52		
D 4201 N	36 - 52			D 1169 S	18 - 50		
D 4457 N	30 - 45			D 1170 S	8 - 50		
D 4709 N	42 - 95			D 1251 S	15 - 36		
D 5807 N	40 - 60			D 1121 SH	36 - 52		
D 5809 N	30 - 60			D 1331 SH	36 - 52		
D 6001 N	55 - 91			D 1381 S	27 - 45		





# Type designations

## SCR/Diode Modules

T 930 S 18 T M C	thyristor
D	diode
A	asymmetric thyristor
930	average on state current (A)
0	standard ceramic disc
1	high power ceramic disc
4	epoxy disc 19 mm high
6	epoxy disc 35 mm high
7	epoxy disc 8 mm high
8	epoxy disc 14 mm high
9	epoxy disc 26 mm high
3	light triggered thyristor,
	ceramic disc
N	phase control device
K	on case (only flatbase or stud)
F	fast thyristor with central gate
S	fast thyristor with distributed
U	gate, fast diode
	fast diode with cathode on case
A	(only flatbase or metric)
B	avalanche diode
	avalanche diode with cathode
NH	on case (only flatbase or metric)
	Diode: soft recovery for high
	current pulses
	thyristor: high turn-on/dt
SH	capability
	softrecovery diode
18	repetitive peak off-state and
	reverse voltage in 10°V
B	metric thread with cable
C	metric thread with solder pin
E	flat base
T	disc
A	turn-off time:
B	8 µs
C	10 µs
D	12 µs
E	15 µs
F	18 µs
G	20 µs
K	25 µs
	30 µs
	40 µs

## Presspacks

M	50 µs
P	55 µs
N	60 µs
T	80 µs
C	120 µs
U	no guaranteed turn off time
0	on request
1	on request
2	on request
B	critical rate of off-state voltage
	50 V/µs
	500 V/µs
C	1000 V/µs
F	1500 V/µs
G	2000 V/µs
H	construction variation
	B01...n
	electrical selection
	N/V/X/Y
	module
	fast switching type
L	type with low $V_{ce(sat)}$
S	fast short tail IGBT Chip
	low sat and fast trench IGBT
T	fast trench IGBT
P	soft switching trench IGBT
1...n	internal reference numbers
C	EmCon Diode
D	higher Diode current
-K	design with common cathode
G	module in big housing
I	integrated cooling
B1...n	Construction variation
S1...n	Electrical selection
BSM 100 GB 120 DL x	example for a standard
BSM	module
BSM	switch with IGBT and FWD
BYM	diode module
100	max. DC-collector current (A)
GA	single switch with one
GB	IGBT and FWD
GB	half bridge
GD	3 phase full bridge (6-pack)
GT	3 single switches an FVDS
GP	(T)ripack)
BSM 100 GB 120 DL x	Power Integrated Module
	B6/Break/Inverter

## PowerBLOCK Modules

TT 162 N 16 K O F-K	with 2 thyristors
TT	with 1 thyristor and 1 diode
ND, DZ, TZ	and 1 diode
AD	average on state current (A)
162	phase control device
N	fast thyristor with central gate
F	fast thyristor with gate cathode
S	interdigitated, fast diode
16	repetitive peak off-state and
	reverse voltage in 10°V
K	mechanical construction: module
O	turn off time (see disk devices)
F	critical rate of rise of off-state
	voltage (see disk devices)
-K	design with common cathode
-A	design with common anode
	B01...n construction variation
	S01...n electrical selection

## IGBT Modules

FF 400 R 33 KF x	example for a High-Power-
FZ	Module
	single switch with one
FF	IGBT and FWD
FF	half bridge
FP	(two IGBTs an FVDS)
FM	Power Integrated Module
FD/DF	chopper module
FB	integrated modules in B2
DD	configuration with IGBT & NTC
F4	dual diode module
FS	FourPACk
400	SixPACk
R	max. DC-collector current (A)
S	reverse conducting
33	fast Diode
K/H/M/	collector-emitter-voltage in 10°V
N/V/X/Y	module
F	fast switching type
L	type with low $V_{ce(sat)}$
S	fast short tail IGBT Chip
E	low sat and fast trench IGBT
T	fast trench IGBT
P	soft switching trench IGBT
1...n	internal reference numbers
C	EmCon Diode
D	higher Diode current
-K	design with common cathode
G	module in big housing
I	integrated cooling
B1...n	Construction variation
S1...n	Electrical selection
BSM 100 GB 120 DL x	example for a standard
BSM	module
BSM	switch with IGBT and FWD
BYM	diode module
100	max. DC-collector current (A)
GA	single switch with one
GB	IGBT and FWD
GB	half bridge
GD	3 phase full bridge (6-pack)
GT	3 single switches an FVDS
GP	(T)ripack)
BSM 100 GB 120 DL x	Power Integrated Module
	B6/Break/Inverter
GAL	chopper module (diode on
	collector side)
GAR	chopper module (diode on
	emitter side)
A	single diode
120	collector-emitter-voltage
DL	in 10°V
DL	Typ with low $V_{ce(sat)}$
DNZ	fast switching type
DLC	low loss type with
S	with collector sense
G	Design Variation
Exxx	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low loss type with
	with collector sense
	Design Variation
	special type
	EmCon Diode
	with collector sense
	Design Variation
	special type
	collector-emitter-voltage
	in 10°V
	Typ with low $V_{ce(sat)}$
	fast switching type
	low



## Package Units Bipolar Products

High Power Thyristors and Diodes	Housing Diameter	Packing Unit
Ceramic ETT Discs	Thyristor Housing 57 mm	3
	Thyristor Housing 75 mm	2
	Thyristor Housing 120 mm	2
	Thyristor Housing 150 mm	1
	Thyristor Housing 170 mm	1
	Thyristor Housing 75 mm	3
Ceramic LTT Discs	Thyristor Housing 150 mm	1
	Thyristor Housing 170 mm	1
	Thyristor Housing 58 mm	3
Ceramic Diodes	Diode Housing 58 mm	3
	Diode Housing 74 mm	2
	Diode Housing 100 mm	3
	Diode Housing 120 mm	2
	Diode Housing 150 mm	1
Rectifier Modules	Housing Width <th>Packing Unit</th>	Packing Unit
EasyBRIDGE 750	25.4 mm x 35.6 mm	40
	33 mm x 45.6 mm	20
EasyBRIDGE 2	45.6 mm x 55.9 mm	20
	42 mm	4
IsoPACK™ Bridge	54 mm	3
	45 mm	10
EconoBRIDGE™ Rectifier	45 mm	10

Standard Thyristors and Diodes	Housing Diameter	Packing Unit
Standard Epoxy Discs	Diode Housing 100 mm	3
	Diode Housing 110 mm	2
	Diode Housing 41 mm	16
	Diode Housing 50 mm	10
	Diode Housing 57 mm	3
	Diode Housing 75 mm	2
	Diode Housing 100 mm	3
	Thyristor Housing 110 mm	2
	Thyristor Housing 50 mm	10
	Thyristor Housing 57 mm	3
	Thyristor Housing 75 mm	2
	Thyristor Housing 100 mm	3
	Thyristor Housing 120 mm	2
	Thyristor Housing 156 mm	3
Standard Ceramic Discs	Diode Housing 41 mm	16
	Diode Housing 56 mm	3
	Diode Housing 58 mm	3
	Diode Housing 74 mm	2
	Thyristor Housing 120 mm	2
	Thyristor Housing 56 mm	3
	Thyristor Housing 74 mm	2
	Flatbase 36 mm	10
	Flatbase 54 mm	5
	Metric Wrench Size 27 mm	10
Metric Wrench Size 32 mm	10	
Metric Wrench Size 42 mm	5	
PowerBLOCK	Housing Diameter	Packing Unit
PB20	20 mm	10
PB25	25 mm	8
PB30	30 mm	4
PB34	34 mm	5
PB50	50 mm	6
PB50.1	50 mm	2
PB60	60 mm	4
PB70	70 mm	2

## Package Units

### IGBT Low Power Modules

EasyPIM™ Modules	Housing Size (overall)	25,4mm x 35,6mm	40
EasyPIM™ 750		33,0mm x 45,6mm	20
EasyPIM™ 1		33,8mm x 48,0mm	24
EasyPIM™ 1B		45,6mm x 55,9mm	20
EasyPIM™ 2		48,0mm x 56,7mm	15

EasyDUAL Modules	Housing Size (overall)	45,6mm x 55,9mm	20
------------------	------------------------	-----------------	----

### IGBT Medium Power Modules

EconPIM™ Modules	Housing Size (overall)	41,0mm x 81,0mm	16
EconPIM™ 1		45,0mm x 107,0mm	10
EconPIM™ 2		62,0mm x 122,0mm	10

34mm Modules, 62mm Modules	Housing Size (overall)	34,0mm x 94,0mm	10
Standard 34mm		62,0mm x 106,4mm	10
Standard 62mm			

### IGBT High Power Modules

IHM Modules	Housing Size (overall)	73,0mm x 140,0mm	4
IHM 73		130,0mm x 140,0mm	2
IHM 130		130,0mm x 140,0mm	2
IHM B 130		190,0mm x 140,0mm	1
IHM 190		190,0mm x 140,0mm	1

PrimePACK™ Modules	Housing Size (overall)	89,0mm x 172,0mm	3
PP2		89,0mm x 250,0mm	2
PP3			

IGBT

SCR / Diode Modules

Presspacks

Stacks

Outlines

Accessories

Explanations

IHV Modules	Housing Size (overall)	73,0mm x 140,0mm	4
IHV 73		130,0mm x 140,0mm	2
IHV 130		190,0mm x 140,0mm	1
IHV 190		130,0mm x 140,0mm	2
IHV B 130		190,0mm x 140,0mm	1
IHV B 190		130,0mm x 140,0mm	2

EconoPACK™+, EconoDUAL™	Housing Size (overall)	162,0mm x 150,0mm	4
EconoPACK™+		45,0mm x 122,0mm	14
EconoDUAL™ 2		62,0mm x 152,0mm	10

EconoPACK™ Modules	Housing Size (overall)	41,0mm x 81,0mm	16
EconoPACK™ 1		45,0mm x 107,0mm	10
EconoPACK™ 2		62,0mm x 122,0mm	10

EasyPACK Modules	Housing Size (overall)	25,4mm x 35,6mm	40
EasyPACK™ 750		33,0mm x 45,6mm	20
EasyPACK™ 1		33,8mm x 48,0mm	24
EasyPACK™ 1B		45,6mm x 55,9mm	20
EasyPACK™ 2		48,0mm x 56,7mm	15

**Business Excellence due to Quality Management**

In quality and reliability of our innovative products and services for power electronics we are a worldwide leading company.

We have developed and introduced a quality management which continuously supervises the stability and the performance of our production and business processes. The qualification of our innovative products and services with the most progressive quality tools contributes effectively and efficiently to a positive business development.

Our quality management is permanently brought in line with the requests and expectations of our customers, partners and employees. The base are the standards DIN EN ISO 9001:2000 and the ISO/TS 16949, which includes the requirements of the automobile industry. In addition to this standards we use the EFQM-Model for Business Excellence and the SIX SIGMA methodology to force the continual improvement of our company.

Our competent and qualified employees are motivated to fulfill the requests and wishes of our customers to their highest satisfaction at all times.



**Environmental and safety management**

By the use of our products, the consumption of electrical energy can be reduced. Following from this, we also during our parts' manufacturing put focus on environmental protection and economical use of natural resources. Our means aiming at environmentally friendly organisation cover all production flows and the whole product range.

Our efforts regarding environmental protection are accompanied by our activities concerning accident control and health protection of our employees. By the high responsibility for our employees, we consider the consistent implementation of environmental protection, health protection, and operational safety as a main factor for our company's continued success and monitor progress in these areas regularly, evaluate the results, and set new focus points and targets.

Our environmental management is certified as per DIN EN ISO 1400, our safety management as per OSHAS 18001.

**Qualitätsmanagement**



Qualität und Zuverlässigkeit unserer innovativen Produkte und Leistungen für die Leistungselektronik sind weltweit führend.

Wir haben ein Qualitätsmanagement entwickelt und eingeführt, das die Stabilität und die Leistung unserer Fertigungs- und Geschäftsprozesse kontinuierlich überwacht, unsere innovativen Produkte und Leistungen mit den fortschrittlichsten Qualitätswerkzeugen qualifiziert und in seiner effektiven und effizienten Umsetzung seinen Beitrag zu einer positiven Geschäftsentwicklung leistet.

Unser Qualitätsmanagement wird ständig den Anforderungen und Erwartungen unserer Kunden, Partner und Mitarbeiter angepasst und kontinuierlich verbessert. Grundlage dafür bilden die Normen DIN EN ISO 9001:2000 sowie die ISO/TS 16949, welche die Forderungen der Automobilindustrie beinhalten. Weiterhin nutzen wir das EFQM-Modell für Business Excellence sowie die SIX SIGMA Systematik, um die ständige Verbesserung unseres Unternehmens zu unterstützen.

Unser kompetenten Mitarbeiter sind qualifiziert und motiviert die Anforderungen und Wünsche unserer Kunden immer zur höchsten Zufriedenheit aller zu erfüllen.

**Umwelt- und Arbeitssicherheitsmanagement**



Der Einsatz unserer Produkte ermöglicht die Einsparung von elektrischer Energie, Konsequenterweise fühlen wir uns auch bei der Herstellung unserer Produkte zur Schonung der Umwelt und der natürlichen Ressourcen verpflichtet. Unsere Maßnahmen zur umweltgerechten Gestaltung umfassen die Produktionsabläufe sowie die gesamte Produktpalette.

Hand in Hand mit den Anstrengungen im Umweltschutz gehen unsere Maßnahmen zur Unfallverhütung und zum Gesundheitsschutz unserer Mitarbeiter, Mitarbeiter und zum Gesundheitsschutz unserer Mitarbeiter vorrausschauenden Schutz- und Schulungsprogrammen werden wir unserer hohen Verantwortung gegenüber unseren Mitarbeitern gerecht.

Wir sehen in der konsequenten Verwirklichung von Umweltschutz, Gesundheitsschutz und Arbeitssicherheit eine wesentliche Basis für den kontinuierlichen Erfolg unseres Unternehmens und überprüfen deshalb regelmäßig unsere Fortschritte in diesen Bereichen, bewerten das Erreichte und setzen uns neue Schwerpunkte und Ziele.

Unser Umweltschutzsystem ist nach DIN EN ISO 14001 und unser Arbeitsschutzmanagementssystem nach OSHAS 18001 zertifiziert.



DK-8230 Abhøj  
F-31673 Labège Cedex (Toulouse)  
Immeuble Actys B2, voie 3,  
BP17316  
Phone +33 561 0084-61  
Fax +33 561 0084-74

DK-2860 Søborg  
Rosenkærret 11 C  
Phone +45 3969 05-11  
Fax +45 3969 05-04

### France

Infineon Technologies France S.A.S  
Industrial Sales  
Daniel Schuffenecker  
2 ter, rue Marcel DORET  
Burlines II  
F-31700 BLAGNAC  
Phone +33 53455 1330  
Fax +33 53455 1334  
www.infineon.com

Sorelec SA  
BP 89  
9 avenue des Peupliers  
35512 Cesson-Sévigné Cedex  
Phone +33 299834567  
Fax +33 299833969

CZ-1700 Praha 7  
Argentská 38/286  
Tel. +420-234 091 011  
Fax +420-234 091 010

### EBV Regional Offices

115, Rue Nicolas Ledoux  
Immeuble Hemiris, Bâtiment A,  
South East  
Phone +33 442 3965-40  
Fax +33 442 3965-50

17 Marlow Road  
Thames House  
South East  
Maldenhead  
Berkshire, SL6 7AA  
Phone +44 16 2877070  
Fax +44 16 28783811

### EBV Regional Offices

South West & Wales  
12 Interface Business Park  
Bincnoll Lane  
Wootton Bassett  
Wiltshire, SN4 8SY  
Phone +44 17 938-49933  
Fax +44 17 938-59555

F-35510 Cesson Sévigné (Hennes)  
29, av. des Peupliers  
Phone +33 299 8300-50  
Fax +33 299 8300-60

EE-10621 Tallinn  
Laki 12  
Phone +372 683 38-66  
Fax +372 683 38-70  
Cell. +372 513 2232

### EBV Regional Office

A-1150 Wien  
Diefenbachgasse 35/1  
Phone +43 18 91 52-0  
Fax +43 18 91 52-30

### Belgium

See Industrial Sales France

### EBV Regional Office

B-1831 Diegem  
Kouterveldstraat 20  
Phone +32 27 160010  
Fax +32 27 208152

### Czech Republic/ Slovak Republic

Vladimír Zizek  
Ulavska 75  
326 00 Pízen  
Phone +420-377-473715  
Fax +420-377-471876  
Mobile +420-736-538133  
Vladimír.Zizek@volny.cz

### Denmark

Hans Buch AS  
Røskildevej 8-10  
DK-2620 Albertslund  
Phone +45 436850-21  
Fax +45 436850-56  
Mobil: +45 40703382  
av@hansbuch.dk

### EBV Regional Offices

### EBV Regional Offices

D-12277 Berlin-Mariendorf  
Kitzingsstr. 15 - 19  
Phone 030 747005-0  
Fax 030 747005-55

D-30938 Burgwedel  
In der Meinwerth 21  
Phone 05139 8087-0  
Fax 05139 8087-70

D-41564 Kaarst  
An der Gumpesbrücke 7  
Phone 02131 9677-0  
Fax 02131 9677-30

D-71229 Leonberg  
Neue Ramtelstraße 4  
Phone 07152 3009-0  
Fax 07152 75958

D-07806 Neustadt/Orla  
Zum Mühlberg 9  
Phone 036481 244-0  
Fax 036481 244-99


D-85586 Pöing  
Im Technologiepark 2-8  
Phone 08121 774-0  
Fax 08121 774-422

D-78050 VS-Villingen  
Kaiserring 12  
Phone 07721 99857-0  
Phone 07721 99857-70

D-65205 Wiesbaden  
Borsisstraße 36  
Phone 06122 8088-0  
Fax 06122 8088-99

### Austria

Infineon Technologies Austria AG  
Roman Bulant  
Operngasse 20 B  
A 1040 Wien  
Phone +43 15877070-333  
Fax +43 15877070-500  
Mobile +43 676 5792003  
Roman.Bulant@infineon.com

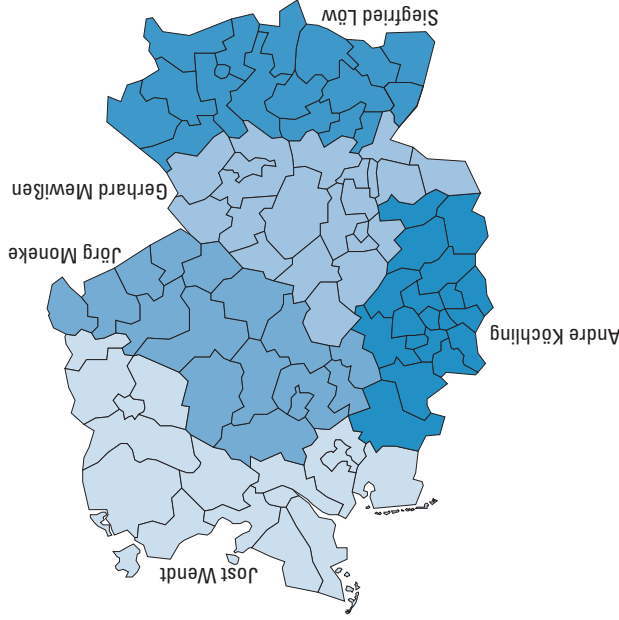

### Germany

Industrial Sales  
Max-Planck-Str. 5  
59581 Warstein/Deutschland  
Phone 02902 764-0  
Fax 02902 764-1167

### Regional Offices

Jörg Moneke  
Burgfeld 12  
D-37130 Gleichen-Klein Lengden  
Phone 05508 974445  
Fax 05508 974447  
Mobile 0170 2267265  
joerg.moneke@infineon.com

### Vertriebsbüro West

André Köchling  
Max-Planck-Str. 5  
D-59581 Warstein  
Phone 02902 764-1178  
Fax 02902 764-1178  
Mobile 0151 14264524  
andre.koechling@infineon.com

### Vertriebsbüro Nord

Gerhard Mewlßen  
Am Schützenrain 63  
D-64354 Reinheim-Lieberau  
Phone 06162 4132  
Fax 06162 4133  
Mobile 0171 2136243  
gerhard.mewlssen@infineon.com

### Vertriebsbüro Süd

Jost Wendt  
Zum Dicken Busch 37  
D-22885 Barsbüttel-Hamburg  
Phone 040 67044592  
Fax 040 67044593  
Mobile 0175 2981581  
jost.wendt@infineon.com

Siegfried Löw  
Brunnweither 9  
D-71116 Gärtringen  
Phone 07034 26655  
Fax 07034 26907  
Mobile 0171 2136388  
siegfried.loew@infineon.com

North

Manchester International

Office Centre, Suite 5B

Styal Road

Manchester, M22 5WB

Phone +44 16 149934-34

Fax +44 16 149934-74

www.comelec.it, info@comelec.it

Scotland

144 West George Street

Glasgow, G2 2HG

Phone +44 14 135220-50

Fax +44 14 135220-59

**Greece**

see Infineon Technologies AG

Industrial Sales

GR-1778 Tavros

Anaxagora Str. 1

Phone +30 210 3414-300

Fax +30 210 3414-304

**Hungaria**

**EBV Regional Office**

H-1037 Budapest

Montvidoe u. 2/B

Phone +36 1 43672-29

Fax +36 1 43672-20

**Ireland**

**EBV Regional Office**

IFL-Dublin 12

Ballymount Trading Estate

Ballymount Road

Walkinstown

Phone +353 1456 4034

Fax +353 1456 4035

**Italy**

Infineon Technologies Italia S.r.l.

Industrial Sales

Mr. Renzo Verzaro

Via Vipiteno 4

I-20128 Milano

Phone +39 0 2252044448

Fax +39 0 2252044033

Renzo.Verzaro@infineon.com

COMTEC srl

Corso Torino 87/D

10090 Ferreria di Buttigliera alta

(TO) Italy

Phone +39 011 9367757

Fax +39 011 9366486

www.comelec.it, info@comelec.it

**EBV Regional Offices**

I-20092 Cinisello, Balsamo (MI)

Via C. Frova, 34

Phone +39 02 66096290

Fax +39 02 66017020

I-41010 Cognento (MO)

Via Campagna, 12

Phone +39 059 2924/211

Fax +39 059 2929/486

I-50127 Firenze

Via Panciatichi, 40

Palazzo 11

Phone +39 05 54369307

Fax +39 05 54265240

I-80128 Napoli (NA)

Via G. Capaldo, 10

Tel. +39 081 579 97 70

Fax +39 081 579 97 70

Cell. +39 335 8 39 05 31

I-00155 Roma

Viale Palmiro Togliatti 1639

Phone +39 064 063665/789

Fax +39 064 063777

**EBV Regional Office**

I-35030 Sarmeola di Rubano (PD)

Piazza Adelaide Longo, 8/11

Phone +39 049 8974701

Fax +39 049 8974726

I-10156 Torino

Corso Verceili, 348

Phone +39 011 2625690

Fax +39 011 2625691

**Netherlands**

See Industrial Sales France

**EBV Regional Office**

NL-3606 Ak Maarssebroek

Planetenbaan 16

Phone +31 346 5830-10

Fax +31 346 5830-25

**Poland**

ITC-Electronics

Mr. Piotr Papke

Krasny Prospekt 82/1

Phone +49 5181 8066-61

Fax +49 5181 8066-89

**EBV Regional Offices**

PL-02-672 Warszawa

Vainera str. 55/B

Phone +48 22 64023-55

Fax +48 22 64023-56

ul. Woloska 18

Phone +48 71 34229-44

Fax +48 71 34229-10

**Russia/Ukraine/GUS**

ITC-Electronics

NTech electronics GmbH

125445 Moskau

Usivicha 24/2

Phone +7 0957975545/35

Fax +7 0954518608

intech@aha.ru

02002 Kiev, Ukraine

Mariny Raskovoi ul. 13, office 910

PO Box 294

Phone +38 0445165444

Fax +38 0445165444

I-10156 Torino

Corso Verceili, 348

Phone +39 011 2625690

Fax +39 011 2625691

**Netherlands**

See Industrial Sales France

ITC Moscow

Russia, 105066 Moscow

35, Nishnaya Krasnoyarskaya

moscow@itc-electronics.com

Phone +7 4953639575

Fax +7 4953639125

ITC Electronics

Saint Petersburg

14, Nab.Obvodnogo Canala

Phone +7 8127030006

Fax +7 8127030006

spb@itc-electronics.com

ITC Novosibirsk

Russia, 630091 Novosibirsk

nsk@itc-electronics.com

Phone +7 3832277888

Fax +7 3833356930

**EBV Regional Offices**

ITC Ekaterinburg

Russia, 620014 Ekaterinburg

Vainera str. 55/B

Phone +7 3432575396

Fax +7 3432575396

ITC Ukraine, Kiev

Ukraine, 02160 Kiev

7a, Prospect Vossoedineniya

office 107

kiev@itc-electronics.com

Phone +38 044596890

Fax +38 0445011303

ITC Kazakhstan, Almaty

Kazakhstan, 480008 Almaty

162 g, Shevchenko street,

almaty@itc-electronics.com

Phone +7 3272686514

Fax +7 3272686614

**EBV Regional Offices**

RUS-127486 Moscow

Korovinskoye Shosse 10,

Build 2, Off 28

Phone +7 495 93787-07

Fax +7 495 93787-06

UA-03040 Kiev

Vasilivskaya str. 14

off. 422-423

Phone +380 44 49622-26

Fax +380 44 49622-28

**Spain/Portugal**

SIEMENS S.A.

Camen Trasobares

Ronda de Europa 5

28760 Tres Cantos – Madrid – Spain

Phone +34 91 5144506

Fax +34 91 5147014

Mobile +34 607 078949

carmen.trasobares@siemens.com

**EBV Regional Offices**

E-08950 Espiguas de Lobregat

(Barcelona)

Anton Fortuny 14-16 Esc. C 3º 2a

Phone +34 93 4733200

Fax +34 93 4736389

C/Ronda de Poniente, 4

Phone +34 91 8043256

Fax +34 91 8044103

**Sweden/Finland/Norway**

Infineon Technologies Sweden AB

Tommy Andersson

Isafjordsgatan 16

S-16481 Kista

Phone +46 8 757 4107

Fax +46 8 757 4919

Tommy.Andersson@infineon.com

**EBV Regional Offices**

S-21 235 Malmö

Derbyvägen 20

Phone +46 40 5921-00

Fax +46 40 5921-01

S-19 272 Sollentuna

Stöångsvägen 7

Phone +46 8 594702-30

Fax +46 8 594702-31

FIN-02240 Espoo

Phatmäki 1 a

Phone +358 927 052790

Fax +358 927 095498

FIN-90100 Oulu

Näskatahankatu 2

Phone +358 85 6249-10

Fax +358 85 6249-15

Postboks 101, Manglerud

Hysningsveien 3B

N-0680 Oslo

Phone +47 22 6717-80

Fax +47 22 6717-89

**Switzerland**

Infineon Technologies Switzerland AG

Thomas Schanekat

Badenerstrasse 623

8048 Zuerich

Phone +41 44 4978043

Fax +41 44 4978050

Thomas.Schanekat@infineon.com

**EBV Regional Offices**

CH-8953 Dietikon

Bernstrasse 394

Phone +41 44 74561-61

Fax +41 44 74561-00

CH-1010 Lausanne

Av. des Boveresses 52

Phone +41 216 5401-01

Fax +41 216 5401-00

**Turkey**

see Infineon Technologies AG

Headquarter

**EBV Regional Offices**

TR-34742 Istanbul

Perdemsag Plaza

Sok. No: 17, D: 134 Kozyatagi

Phone +90 21 646313-52

Fax +90 21 646313-55

**EBV Regional Offices**

Headquarter

**Turkey**

see Infineon Technologies AG

Headquarter

**EBV Regional Offices**

FIN-02240 Espoo

Phatmäki 1 a

Phone +358 927 052790

Fax +358 927 095498

**EBV Regional Offices**

S-21 235 Malmö

Derbyvägen 20

Phone +46 40 5921-00

Fax +46 40 5921-01

## America

Headquarters  
Infineon Technologies

Industrial Power, Inc.  
1050 Route 22  
Lebanon, NJ, 08833

Phone +1 908 236-5600

Fax +1 908 236-5620

Info.usa@infineon.com

## Regional Offices

### Eastern Region

Infineon Technologies

Industrial Power, Inc.

Phone +1 781 275-9016

Fax +1 781 275-9016

Concord, MA 01742-0187

Industrial Power, Inc.

165 St James Circle

Union Grove, WI 53182

Phone +1 262-878-9898

Fax +1 262-878-2898

Neil.Perkins@infineon.com

William.Tennie@infineon.com

Infineon Technologies

Industrial Power, Inc.

21175 Tomball Pkwy

Houston, TX 77070

Phone +1 281-374-6222

Fax +1 281-374-7621

Dorel.Ciome@infineon.com

### Western Region

Infineon Technologies

Industrial Power, Inc.

7829 Center Blvd, SE

Suite 162

Snouqualmie, WA 98065

Phone +1 425 396-5060

Fax +1 425 396-5061

Dwight.Harvey@infineon.com

## USA

Please contact:

Infineon Technologies

Industrial Power, Inc.

in Lebanon, NJ

Info.usa@infineon.com

## Canada

Please contact:

Infineon Technologies

Industrial Power, Inc.

in Lebanon, NJ

Info.usa@infineon.com

## Africa

The Components Group PTV Ltd.

91, Silverstone Crescent,

Kyalami Business Park, Kyalami

1685 Midrand, South Africa

Phone +27 11 466-1828

Fax +27 11 466-1878

## Australia/New Zealand

Con Tsasoudis

885 Mountain Highway

Baywater, Victoria 3153

Melbourne Australia

con.tsasoudis@infineon.com

## Victoria

Fastron Technologies PTV, Ltd.

25 Kingsley Close

Mr. Mike Trubridge

3178 Rowville, VIC

Victoria 3178, Australia

Phone +61 39763-5155

Fax +61 39763-5166

## Asia

### Ascan

Sales

Infineon Technologies AP Pte. Ltd.

Derrick Lee

8 Kallang Sector

Singapore 349282

Phone +65 6876 3109

Fax +65 6876 2864

derrick.lee@infineon.com

Achieva Components Pte. Ltd.

Gary Oh

240 Macpherson Road

#02-03, Pines Industrial Bldg

Singapore 348574

Fax +65 67476880

garyoh@achieva.com.sg

### Korea

Infineon Technologies Korea Co. Ltd.

Hong Sung Il

4th Floor, Sigma Tower 7-19

Shincheon-dong, Songpa-gu

Seoul Korea 138-734

Fax +82 234600901

Sung-Il.Hong@infineon.com

DABO Industrial Systems Co. Ltd.

Kim Chang-Soo

Rm 909, Daehung TechnoTown-3rd

448, KaSan-Dong, KumChon-Gu

Seoul, Korea

Fax +82221073328

support@dabois.com

### China

Infineon Technologies HK Ltd.

Ma Kwok Wai

Suite 302 Level 3

Festival Walk, 80 Tat Chee Avenue

Kowloon Tong, HongKong

Fax +852 2832 20615

Kwokwai.ma@infineon.com

## Shenzhen

Eurotone Electric Ltd

Bernard Yuen

Room 401, Tianan Hi-Tech

Plaza Tower A Tianan Cyber

Park, Futian, Shenzhen, China

Fax: +86 75583438233

bernard@etpec.com

## Shanghai

Infineon Technologies International

Trade (Shanghai) Co. Ltd.

Simon Chen

No. 8, Lane 647, SongTao Road,

Zhangjiang Hi-Tech Park, Pudong,

Shanghai 201203, P.R.China.

Fax +8621 61019420

Simon.Chen@infineon.com

## Beijing

Beijing Jingchuan Electronic

Technology Development Co. Ltd.

Zhou Wen Ding

RM11803, Tower A, Bldg 20

Area 1, Fangchengyuan Fangzhuang

Beijing, China P.C.100078

jingchuan@a-l.net.cn

## India

Infineon Technologies India Pvt. Ltd.

Padmanabha Gowda

10th Floor, Discover Building

International Tech Park

Whitefield Road

Bangalore 560066, India

Fax +91 8051392333

Padmanabha.Gowda@infineon.com

## ASEAN

## Shenzhen

Eurotone Electric Ltd

Bernard Yuen

Room 401, Tianan Hi-Tech

Plaza Tower A Tianan Cyber

Park, Futian, Shenzhen, China

Fax: +86 75583438233

bernard@etpec.com

## Shanghai

Infineon Technologies International

Trade (Shanghai) Co. Ltd.

Simon Chen

No. 8, Lane 647, SongTao Road,

Zhangjiang Hi-Tech Park, Pudong,

Shanghai 201203, P.R.China.

Fax +8621 61019420

Simon.Chen@infineon.com

## Beijing

Beijing Jingchuan Electronic

Technology Development Co. Ltd.

Zhou Wen Ding

RM11803, Tower A, Bldg 20

Area 1, Fangchengyuan Fangzhuang

Beijing, China P.C.100078

jingchuan@a-l.net.cn

## India

Infineon Technologies India Pvt. Ltd.

Padmanabha Gowda

10th Floor, Discover Building

International Tech Park

Whitefield Road

Bangalore 560066, India

Fax +91 8051392333

Padmanabha.Gowda@infineon.com

### China

Infineon Technologies HK Ltd.

Ma Kwok Wai

Suite 302 Level 3

Festival Walk, 80 Tat Chee Avenue

Kowloon Tong, HongKong

Fax +852 2832 20615

Kwokwai.ma@infineon.com

## Hong Kong

Infineon Technologies HK Ltd.

Ma Kwok Wai

Suite 302 Level 3

Festival Walk, 80 Tat Chee Avenue

Kowloon Tong, HongKong

Fax +852 2832 20615

Kwokwai.ma@infineon.com

## Taiwan

Infineon Technologies Taiwan Ltd.

Jeffrey Shen

12F-1, No.3-2 Yuan Qu St., Nan Kang

Software Park, Taipei

Taiwan 115, R.O.C.

Fax +886 226557505

Jeffrey.Shen@infineon.com

Electriz Enterprises Co. Ltd.

Hoger Sheng

Room C, 7F, No. 20,

Min Chuan W, Rd.

Taipei, Taiwan, R.O.C.

Fax +886 225313192

rogersheng@elecbiz.com.tw

Yuban & Co.

Cheng Ray

9F, No. 19-2, San Chong Road

Nan-King, 115

Taipei, Taiwan

Fax +886 226550666

ray-cheng@yuban.com.tw

## Japan

IFX Japan Adresse

Gate City Osaka East Tower 21F

1-1-2 Osaka,

Shinagawa-ku, Tokyo,

141-0032, Japan

Phone +81 35745-7221

Fax +81 35745-7413

verträgliche Gewährleistung übernehmen. Eine solche Gewährleistung richtet sich ausschließlich nach Maßgabe der vorgenannten Allgemeinen Lieferbedingungen. Garantien jeglicher Art werden von uns für die in diesem Katalog aufgeführten Produkte und deren Eigenschaften ebenfalls übernommen.

Sollte der Kunde von uns Produktinformationen benötigen, die über den Inhalt dieses Katalogs oder des Produktdatenblatts hinausgehen und insbesondere eine spezifische Verwendung und den Einsatz unseres Produktes betreffen, sollte er sich mit dem für ihn zuständigen Vertreibsbüro ([www.infineon.com](http://www.infineon.com)) in Verbindung setzen. Für Interessenten halten wir auch Application Notes bereit.

### Gefahrenstoffe und gefährliche Anwendungen

Aufgrund der technischen Anforderungen können unsere Produkte gesundheitsgefährdende Substanzen enthalten. Bei Rückfragen zu den in den Produkten jeweils enthaltenen Substanzen sollte sich der Kunde ebenfalls mit dem für ihn jeweils zuständigen Vertreibsbüro ([www.infineon.com](http://www.infineon.com)) in Verbindung setzen.

Sollte der Kunde beabsichtigen, unsere Produkte in Anwendungen der Luftfahrt, in gesundheits- oder lebensgefährdenden oder lebenserhaltenden Anwendungen bereichern einzusetzen, bitten wir um Mitteilung.

Wir weisen darauf hin, dass wir für diese Fälle die gemeinsame Durchführung eines Risiko- und Qualitätsassessments von speziellen Qualitätssicherungsvereinbarungen einbringen

- die gemeinsame Einführung von Maßnahmen einer laufenden Produktbeobachtung

- dringend empfehlen und gegebenenfalls die Belieferung von der Umsetzung solcher Maßnahmen abhängig machen.

Soweit erforderlich und/oder gesetzlich vorgeschrieben, hat der Kunde entsprechende Hinweise an dessen Abnehmer zu geben.

### Lieferbedingungen

Für unsere Lieferungen und Leistungen gelten ausschließlich die „Allgemeinen Lieferbedingungen für Zentralverbandes Elektrotechnik- und Elektroindustrie (ZVEI) e.V.“ (Stand: Januar 2002), nachfolgend auch „die Allgemeinen Lieferbedingungen“ genannt. Entgegenstehende oder von den Allgemeinen Lieferbedingungen abweichende Bedingungen des Kunden erkennen wir nicht an, es sei denn, wir hätten ausdrücklich schriftlich ihrer Geltung zugestimmt. Die Allgemeinen Lieferbedingungen gelten auch dann, wenn wir in Kenntnis entgegenstehender oder von unseren Allgemeinen Lieferbedingungen abweichender Bedingungen meinen Lieferbedingungen an den Kunden vorhalten ausführen.

### Mindestbestellwert

Aufträge werden nur in ganzen Verpackungseinheiten und vielfachen davon abgewickelt. Für Aufträge mit einem Bestellwert unter 250 Euro berechnen wir unseren Kunden eine zusätzliche Bearbeitungsgebühr von 40 Euro.

### Katalog- und Produktdaten

Inhaltliche Änderungen des Katalogs, insbesondere der darin enthaltenen Produktdaten, bleiben – insbeson- dere infor- ge- tech- nolo- gischer Fortentwicklungen – vorbehalten.

Die in diesem Katalog enthaltenen Produktdaten sind ausschließlich für technisch versierte Kunden und/oder Anwender bestimmt. Die Beurteilung der Eig- nung unserer Produkte für die Kundenanwendung so- wie die Beurteilung der bereitgestellten Produktdaten für diese Anwendung obliegt dem Kunden bzw. den technischen Abteilungen des Kunden.

In diesem Katalog werden ebenso wie auf den ein- schlägigen Produktdatenblättern diejenigen Merkmale unserer Produkte beschrieben, für die wir eine Liefer- messung

### Terms and Conditions of Delivery

All our deliveries and services are exclusively subject to the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry“ recommended by the Zentralverband Elektrotechnik- und Elektroindustrie (ZVEI) e.V. – (Version January 2002), hereinafter referred to as „General Conditions of Supply“. Conflicting or deviating terms and conditions of our customers are rejected, unless and to the extent we have given our explicit written consent. The General Conditions of Supply shall apply even where we have performed the delivery and service without expressly rejecting conflicting or deviating conditions of our customer.

### Minimum Order Value

Orders will only be handled in whole packing units and multiple of these. For order-values below 250 Euro we will charge our customers an additional handling charge of 40 Euro.

### Data in this Brochure and Product related Data

Specifically due to technological progress we have to reserve the right to change this brochure and/or product related data at any time.

The product data contained in this brochure is exclusively intended for technically trained customers and their staff. Our customers and their technical departments are required to evaluate the suitability of our products for the intended application and the completeness of the product data with respect to such application.

This brochure like the relevant product data sheet is describing the specifications of our products for which a warranty is granted. Any such warranty is granted exclusively pursuant to the above General Conditions of Supply. There will be no guarantee of any kind for the product, any of its characteristics and/or its specifications.

Customers that require product information in excess of the data given in this brochure or which concerns the specific application of our product, are asked to contact our closest sales office.

([www.infineon.com](http://www.infineon.com)) For those who are specifically interested we may provide application notes.

### Dangerous Substances and Applications

According to technical requirements our products may contain dangerous substances. For information on the types in question please contact our closest sales office. ([www.infineon.com](http://www.infineon.com))

Should our customer intend to use the product in aviation applications, in health or live endangering or life support applications, he is required to give us notification.

For any such applications we urgently recommend to perform joint Risk and Quality Assessments – the conclusion of Quality Agreements – to establish joint measures of an ongoing product survey,

and notify to our customers that we may make delivery depended on the realization/establishment of any such measures.

If and to the extent necessary or required by applicable law, our customers are required to forward equivalent notices to your customers.





Infineon Technologies AG  
Max-Planck-Straße 5

D-59581 Warstein

Tel. +49 (0) 29 02 7 64-0

Fax +49 (0) 29 02 7 64-12 56

[www.infineon.com](http://www.infineon.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [infineon](#) manufacturer:*

Other Similar products are found below :

[TLE6209R](#) [BTS442E2E3062ABUMA1](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#) [FD300R06KE3](#)  
[FF1200R17KE3\\_B2](#) [FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4\\_B11](#) [FP25R12KT4\\_B11](#) [FS150R12KE3G](#)  
[FS600R07A2E3\\_B31](#) [FZ1600R17HP4\\_B2](#) [FZ1800R17KF4](#) [FZ2400R17HE4\\_B9](#) [FZ600R65KE3](#) [DD261N22K](#) [DF1000R17IE4](#) [BAT 165](#)  
[E6327](#) [BCR 141W H6327](#) [BCR 533 E6327](#) [BDP950H6327XTSA1](#) [BSC093N04LSGATMA1](#) [BSM50GB60DLC](#) [BSO080P03NS3EGXUMA](#)  
[BSR802NL6327HTSA1](#) [BSR92PH6327XTSA1](#) [BSS806NEH6327XTSA1](#) [BSZ086P03NS3EGATMA](#) [BTF3050TE](#) [BTM7811KAUMA1](#)  
[IPD50N04S4-08](#) [IPW60R190E6FKSA1](#) [IRPLHID2A](#) [KIT\\_TC1791\\_SK](#) [KIT\\_XMC45\\_AE4\\_002](#) [KIT\\_XMC4x\\_COM\\_ETH-001](#)  
[EVALM10565DTOBO1](#) [EVALM113020584DTOBO1](#) [FF300R17KE3\\_S4](#) [FF450R12ME4\\_B11](#) [FF600R17ME4](#) [T1401N42TOH](#)  
[T1500N16TOF VT](#) [T1851N60TOH](#) [T901N36TOF](#) [FS300R12KE4](#) [FS450R17KE4](#) [FZ1500R33HE3](#)