



DATE	REV	DESCRIPTION	BY	CHKD

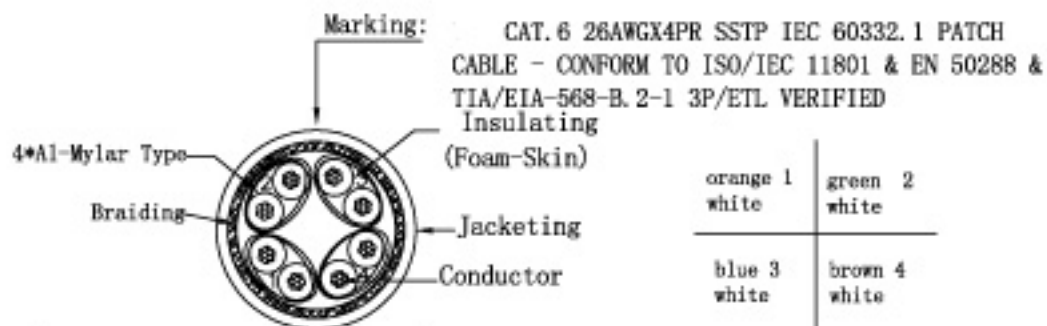

Conductor	Base Copper 26AWG 35.1±0.05mm
Insulation	Thickness:MIN at any point 0.2mm MAX.AVG.0.15mm Diameter: 1.09±0.05mm
Jacketing PVC	Thickness:MIN at any point 0.45mm MAX.AVG.0.55mm Diameter: 1±0.2mm

WIRE	CAT. 6 11P/12P STR 26AWG4P
PLUG	YS-02 8PSC 50u
LENGTH	1M
COLOR	GYB25

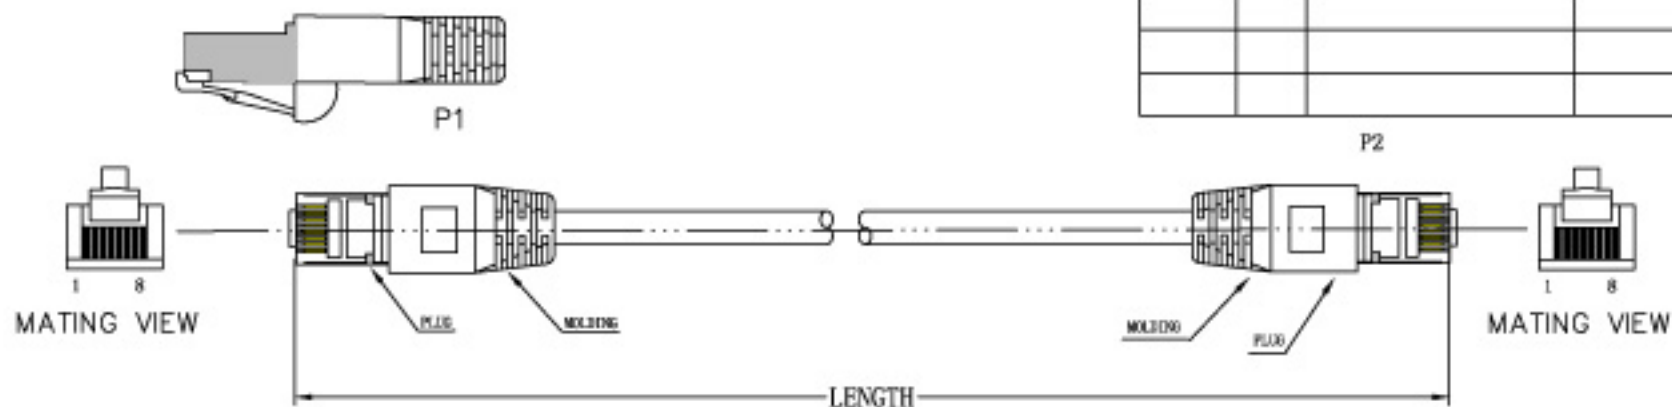

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

RoHS Compliant

Unless specified on the drawing, tolerances are per the follows:  
 .           ± 1  
 .X          ± 0.2  
 .XX         ± 0.05



DRAW. NO	YS-02	ITEM	2002-1		
DEPARTMENT		DRAW	ZhaoyangWu	DATE	2007/06/07
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [videk manufacturer](#):*

Other Similar products are found below :

[2129HQ-1](#) [1996-10B](#) [1054](#) [2961-30BK](#) [2993-10BK](#) [2996AS-1GY](#) [2961-15G](#) [2965-0.5RG](#) [2965-0.75Y](#) [2965-10Y](#) [2965-30IM](#) [4093-2](#)  
[1963-3](#) [1962-10R](#) [2259](#) [2965-30G](#) [2965-3BK](#) [2996AS-3G](#) [2965-1.5B](#) [2996AS-0.5Y](#) [8103](#) [2419-2](#) [2965-0.3PK](#) [2965-1.5RG](#) [2965-2PR](#)  
[2965-30](#) [2965-30BK](#) [2409M-2](#) [2993-3RG](#) [2996AS-10B](#) [2996AS-5G](#) [1962-3](#) [2996AS-3](#) [2560A-2](#) [8104](#) [2561-1](#) [9301-5](#) [2965-0.75BK](#) [2965-](#)  
[30B](#) [2965-3RG](#) [2996AS-10BK](#) [2218D-2](#) [1962-5](#) [2129GHQ-3](#) [2965-15B](#) [2965-15Y](#) [3089-2](#) [2118D](#) [1961-50R](#) [1961-50B](#)