



## STABLE AND SAFE ENERGY SOURCE FOR ALL LiFePO4, AGM, GEL AND SLA BATTERIES




### Precise Charging with 7 configurations to adapt to different battery types

The Monolith charger is designed to work seamlessly with a wide range of different types of batteries, including AGM, GEL, calcium, SLA and LiFePO4, providing them with a stable and safe energy source and a guarantee that the battery will remain in good condition throughout its lifetime.

### 12V CHARGER SETTING

SETTING	DIP SWITCH	BULK/ ABSORPTION	FLOAT	BATTERY TYPE
L	 SW 0	14.6V		LiFePO4
S	 SW 1	14.8V	13.8V	Flooded
	 SW 2	15.0V	13.8V	Calcium
	 SW 3	14.6V	13.6V	AGM
	 SW 4	14.4V	13.4V	SLA
	 SW 5	14.2V	13.2V	GEL

## DISCOVER THE UNIQUE POWER OF SMART CHARGING WITH THE MONOLITH CHARGER

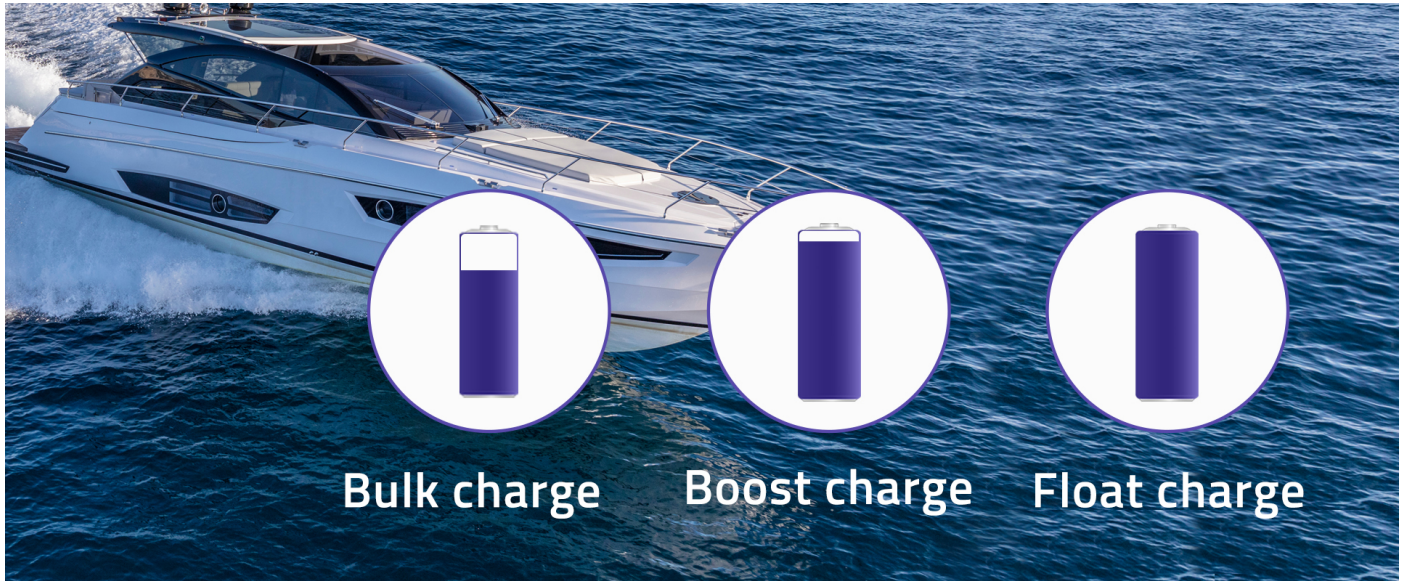

### Integrated in the intelligent 3-stage charging process for optimum performance of your battery


The Monolith smart charger will charge your battery using intelligent 3-stage charging which involves adjusting the charging voltage and current to the current state of charge of the battery, it consists of 3 stages :

**The BULK** stage is the identification of the battery and its needs, charging up to 80% of the battery capacity, with a maximum current kept constant and a high voltage, **The BOOST** The BOOST stage is the so-called absorption charging, it keeps the charging voltage constant between 14.1VDC and 14.8VDC, reducing the charging current, **The FLOAT** stage is the last charging cycle, a so-called sustained charge in which the battery has already reached 95% of its capacity and gradually reaches 100%, there is a reduction in the charging voltage to a constant value between 13.0VDC and 13.8VDC, the charging current automatically drops to 0A once the battery is charged.

The current charging stage of the battery is indicated by an LED on the charger.



## OPTIMAL PERFORMANCE, LONG BATTERY LIFE AND MINIMISATION OF COSTS AND ENERGY LOSSES

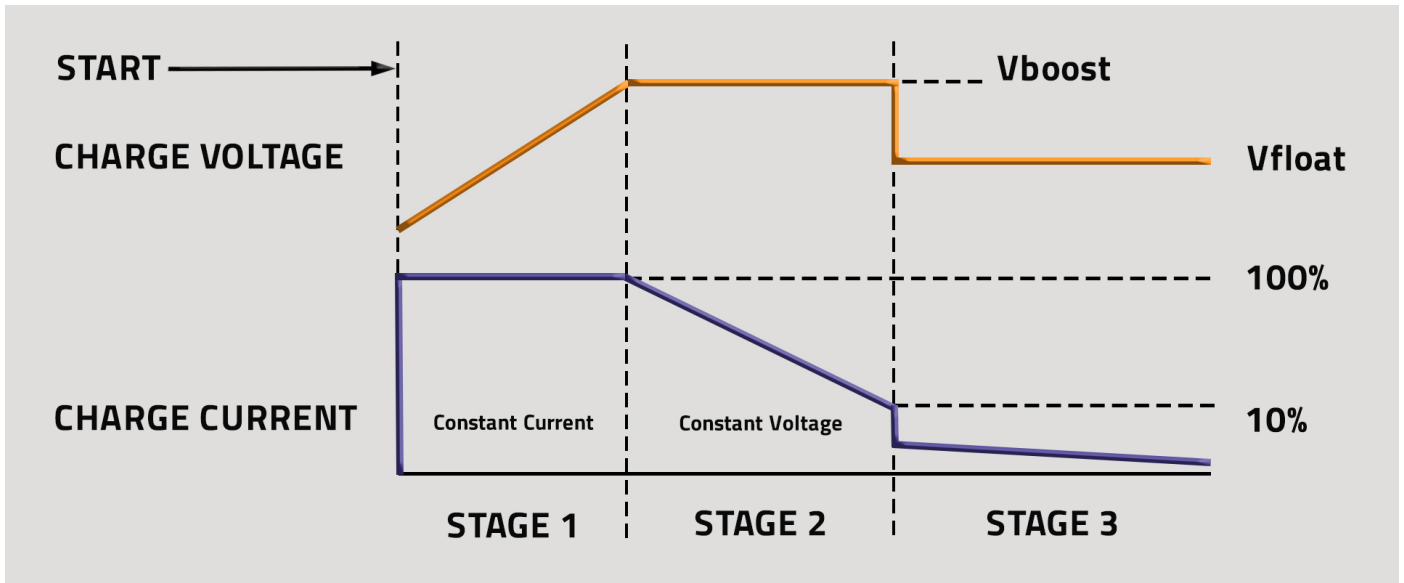

### Perfect maintenance of your battery at every stage of charging

Intelligent 3-stage charging has many advantages, above all it can:

- Ensure that the battery is **fully and evenly charged**, improving performance and battery life,
- **Prevent overheating, overcharging or damaging the battery**, which improves battery safety and reliability,
- Save energy and costs, as it reduces the **loss of energy and time required** to charge the battery.

### TRUST OUR CHARGERS - ENJOY UNINTERRUPTED ENERGY



### 7 different SW combinations, Automatic switch-off, Durable aluminium housing, Active cooling, Fuse included

- Equipped with **DIP-switch** - this is the charger's component for changing the battery charging settings - it allows 7 different SW combinations to be set, we can adjust the charging mode according to the battery type you have, e.g. charging SLA / gel / AGM / flooded / calcium and LiFePO4 lead-acid batteries, as well as the constant voltage power supply mode,
- **3-stage charging mode** - provides much faster, efficient and full charging without the problem of voltage drops,
- **Durable aluminium housing** - perfectly conductive and corrosion-resistant,
- **Built-in active cooling** - automatically switches on when charging and protects the charger especially when charging heavily discharged batteries,
- LED indication of charger operation,
- **Built-in fuse**,
- Features short-circuit, reverse polarity, overcharging and overheating protection,
- **Automatic shutdown** at the end of the charging process - switches off charging mode and remains in sleep mode when the battery is charged,
- Necessary wiring included and fuse.

## SAFETY IS OUR PRIORITY



### Use of advanced security features

When designing the chargers, we placed safety above all else, which is why the product is equipped with comprehensive safety features, including protection against reverse polarity, overvoltage or overheating. For safety reasons, the input and output of the charger have been completely isolated. UVP protection - protects against under-voltage at the output, SCP protection - it protects against short circuits, OVP protection - it protects against too high output voltage, OCP protection - it protects against too high current on the line, OTP protection - is protection against overheating.

### CONFIDENCE CONFIRMED BY A WARRANTY

#### Product with 24 months guarantee

Zależy Ci na wysokiej jakości kupowanego produktu? Nasze rozwiązania spełniają Twoje oczekiwania. Dane przez nas są 24-miesięczną gwarancją liczoną od daty zakupu.

### TECHNICAL DATA

Producer	Qoltec
Type of charging	3 step charging mode
Input voltage	180 - 260V
Output voltage	12-15VDC
Output current	Max 50A
Load Adjustment	1.5% for output current; from no load to full load 0-40°C
Efficiency	88%
Connector	Red + black crocodile-type terminals with brass contacts
Cooling system	1 x Fan with thermal control
Protection	Short-circuit protection Protection against overheating Overcurrent protection Protection against low voltage Overvoltage protection Reverse polarity protection
Protection against inverse polarity	Yes
Operating temperature	0°C ~ +40°C
Usage	LiFePO4 AGM GEL SLA Calcium EFB
Additional information	The device has been CE tested and confirms compliance with applicable directives and standards.
Notices	Charger designed for 12 V batteries only Make sure that the cables are properly matched to the batteries Before removing the battery, first switch off all consumers and then disconnect it from the circuit Only use rechargeable batteries Never attempt to charge a frozen or damaged battery !
Dimensions (D/L x W x H)	222 x 267 x 83 mm
Package	Box
Package contents	1 x Battery charger 1 x Power cable 1 x Starter cable set 1 x Operating instructions
Package depth / length [mm]	286
Package width [mm]	415
Package height [mm]	170
Net weight [kg]	2.890
Gross weight [kg]	3.100
Certificate	CE
Warranty	24 month
EAN code	5901878519579

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adapters category](#):*

*Click to view products by [QOLTEC manufacturer](#):*

Other Similar products are found below :

[52481](#) [B631-2B1](#) [XTAR LC4 AA/AAA 1,5V LI-ION](#) [52480](#) [51959](#) [52479](#) [MC2-C](#) [AL800](#) [51956](#) [XTAR LC8 AA/AAA 1,5V LI-ION](#) [SC1-C](#) [51955](#) [51957](#) [MC1-C](#) [MINI CHARGER + 2XAAA 800MAH](#) [POLOLU MICROSD ADAPTER](#) [GROVE CAPE FOR BEAGLEBONE](#) [GROVE BREAKOUT FOR LINKIT SMART 7688 DUO](#) [RBFN-EU-SEN-BMT-12](#) [9546](#) [9755](#) [9983](#) [OKY3380](#) [I2C HUB](#) [DUAL](#) [MAX14870 MOTOR DRIVER SHIELD](#) [6PRO122420](#) [AB-12.100/ST8VA](#) [AL 300 PRO 2V/6V/12V](#) [BC4](#) [BQ-CC65](#) [CABLE-1/CL](#) [CABLE-2/CL](#) [CABLE-3/CL](#) [CL16.8VDC-5A -AS](#) [CL8.4VDC-5A](#) [EP12M248L](#) [EPA1020-075](#) [EPA1206PRO](#) [FC2](#) [GM3A](#) [GP 2XP861 + 8X2100](#) [RECYKO DOK](#) [GP ECO B421 + 4XAA RECYKO 2100 + D451](#) [GP ECO E211 + 2XAA RECYKO 2100](#) [GP ECO M451 + 4XAA RECYKO 2700](#) [LIFEPO4-25.6V-4A](#) [LIFEPO4-38.4-5A](#) [LI-ION-11.1V-5A](#) [LI-ION-14.8V-5A](#) [LI-ION-14.8V-8A](#) [LI-ION-25.9V-2A](#)