



DATE	REV	DESCRIPTION	BY	CHKD

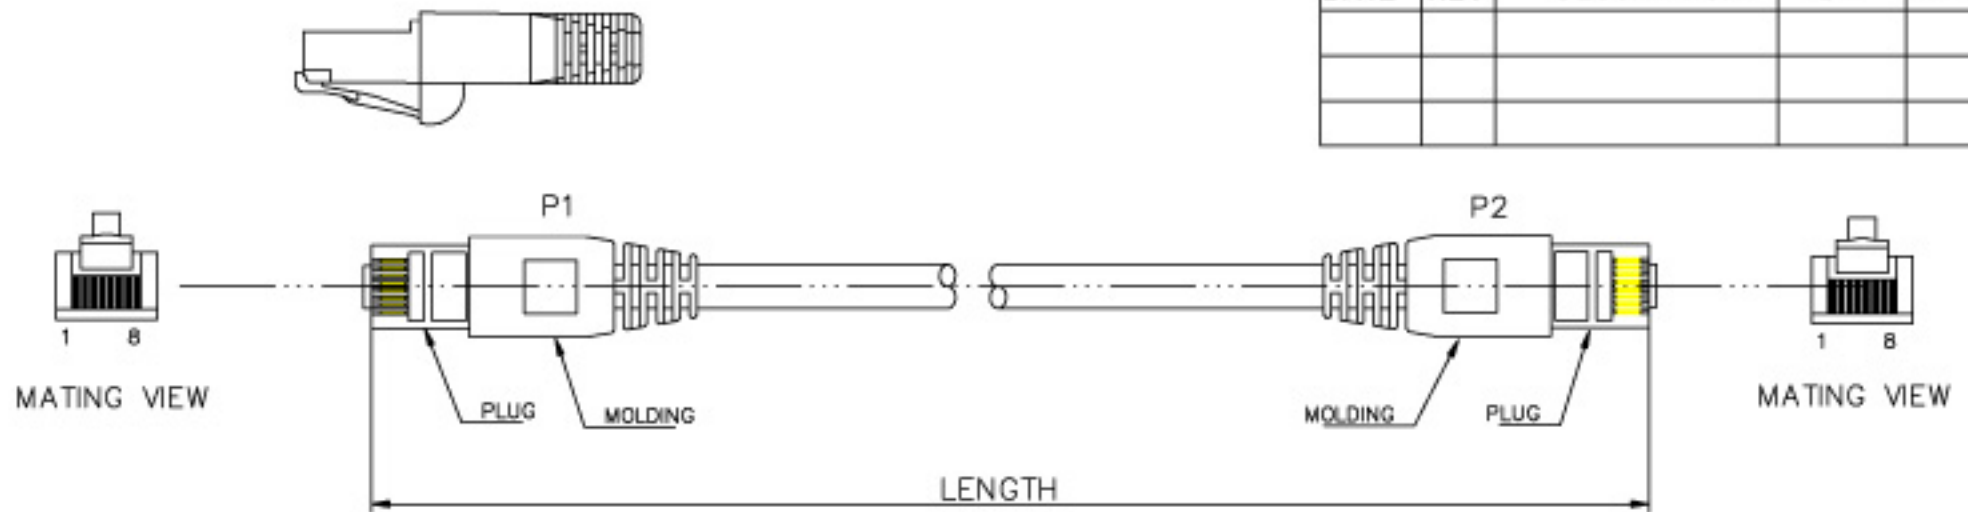

Marking: **CAT.6 UTP 24AWG×4P PATCH TYPE LSOH IEC 332.3.C**
-ISO/IEC 11801 Ed. 2 & EN 50288 & TIA/EIA-568-B.2-1 3P VERIFIED

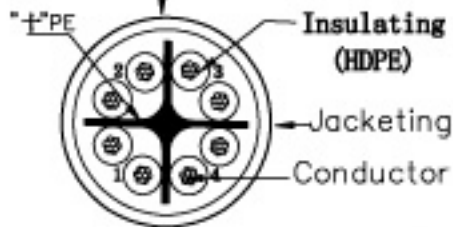


orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Base Copper 24AWG 16.1964±0.05mm
Insulation	Thickness(MIN) at any point 0.15mm MAX AVGS.25mm Diameter 1.94±0.05mm
Jacketing LSOH	Thickness(MIN) at any point 0.55mm MAX AVGS.08mm Diameter 4.44±0.3mm

WIRE	CAT.6 UTP STR 24AWG×4P
PLUG	YU-02
LENGTH	XXM
COLOR	XX

RoHS Compliant

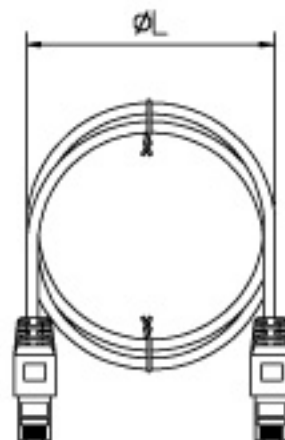

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XXX	± 0.05

3RD		
-----	--	--

DRAW. NO	YU-02	ITEM	2293-XXX
DEPARTMENT		DRAW	Zhongyang Wu
SCALE		CHECKER	
UNIT	MM	APPROVAL	
		DATE	2007/05/14
		DATE	
		DATE	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [videk manufacturer](#):

Other Similar products are found below :

[2129HQ-1](#) [1996-10B](#) [1054](#) [2961-30BK](#) [2993-10BK](#) [2996AS-1GY](#) [2961-15G](#) [2965-0.5RG](#) [2965-0.75Y](#) [2965-10Y](#) [2965-30IM](#) [4093-2](#)
[1963-3](#) [1962-10R](#) [2259](#) [2965-30G](#) [2965-3BK](#) [2996AS-3G](#) [2965-1.5B](#) [2996AS-0.5Y](#) [8103](#) [2419-2](#) [2965-0.3PK](#) [2965-1.5RG](#) [2965-2PR](#)
[2965-30](#) [2965-30BK](#) [2409M-2](#) [2993-3RG](#) [2996AS-10B](#) [2996AS-5G](#) [1962-3](#) [2996AS-3](#) [2560A-2](#) [8104](#) [2561-1](#) [9301-5](#) [2965-0.75BK](#) [2965-](#)
[30B](#) [2965-3RG](#) [2996AS-10BK](#) [2218D-2](#) [1962-5](#) [2129GHQ-3](#) [2965-15B](#) [2965-15Y](#) [3089-2](#) [2118D](#) [1961-50R](#) [1961-50B](#)