


# 856704


## 836.5 MHz SAW Filter

### Applications

- General purpose wireless
- Wireless infrastructure
- 3G, 4G, Multistandard
- Repeaters

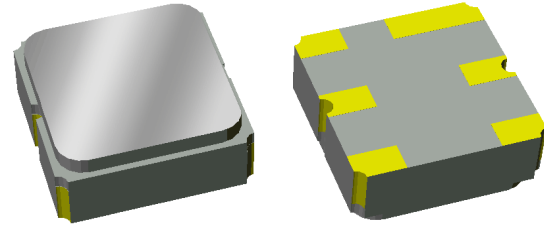

### Product Features

- Usable bandwidth 25 MHz
- High attenuation
- Low Loss
- Excellent power handling
- Single-ended operation
- No matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically Sealed
- **RoHS** compliant, **Pb**-free 


### General Description

856704 is a general purpose Uplink filter for Band 5. This filter was specifically designed in a 3x3mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with high attenuation and excellent power handling, makes this filter a natural choice for our customers Uplink RF filtering needs.

### Functional Block Diagram

Top view

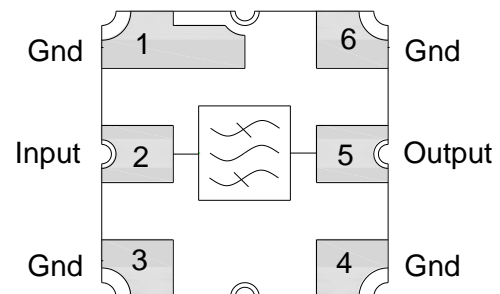

### Pin Configuration

Pin # SE	Description
2	Input
5	Output
1,3,4,6	Case Ground

### Ordering Information

Part No.	Description
856704	packaged part
856704-EVB	evaluation board

Standard T/R size = 5000 units/reel.

## Specifications

### Electrical Specifications <sup>(1)</sup>

Specified Temperature Range: <sup>(2)</sup> -30 to +85 °C

Parameter <sup>(3)</sup>	Conditions	Min	Typical <sup>(4)</sup>	Max	Units
Center Frequency		-	836.5	-	MHz
Maximum Insertion Loss	824 – 849 MHz	-	1.2	2.0	dB
Amplitude Variation <sup>(5)</sup>	824 – 849 MHz	-	0.3	1.5	dB p-p
Amplitude Ripple <sup>(6)</sup>	824 – 849 MHz	-	0.18	0.8	dB p-p
Phase Ripple	824 – 849 MHz	-	9.7	30	deg p-p
Group Delay Ripple	824 – 849 MHz	-	13	30	ns p-p
Absolute Group Delay	824 – 849 MHz	-	21	75	ns
Stopband Attenuation <sup>(7)</sup>	180 – 220 MHz	30	46	-	dB
	409 – 635 MHz	30	40	-	dB
	869 – 894 MHz	14	20	-	dB
	928 – 953 MHz	25	31	-	dB
	1136 – 1161 MHz	20	31	-	dB
	1240 – 1265 MHz	45	55	-	dB
	1440 – 1540 MHz	30	52	-	dB
	1540 – 1570 MHz	33	52	-	dB
	1570 – 1692 MHz	30	52	-	dB
	1853 – 2110 MHz	35	41	-	dB
	2111 – 2325 MHz	30	41	-	dB
	2885 – 3382 MHz	13	20	-	dB
3917 – 4439 MHz	10	19	-	dB	
4949 – 5496 MHz	5	11	-	dB	
Input/output VSWR	824 – 849 MHz	-	1.68	2.0	-
Source Impedance <sup>(8)</sup>	Single-ended	-	50	-	Ω
Load Impedance <sup>(8)</sup>	Single-ended	-	50	-	Ω

#### Notes:

- All specifications are based on the TriQuint schematic for the main reference design shown on page 3
- In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- Typical values are based on average measurements at room temperature
- Describes the total variation over the defined frequency range
- This is defined as the worst difference between a peak and adjacent valley
- Relative to Passband Loss (not absolute value)
- This is the optimum impedance in order to achieve the performance shown

### Absolute Maximum Ratings


Parameter	Rating
Operable Temperature	-40 to +85 °C
Storage Temperature	-40 to +85 °C
DC Voltage on any port (instantaneous only)	+5 V
Input Power <sup>(9)</sup>	+22 dBm

- Input Power is targeted for an applied CW modulated RF in the 824-849 MHz band at 55 °C for a minimum of 125 hrs

Operation of this device outside the parameter ranges given above may cause permanent damage.

### Reference Design


#### Schematic

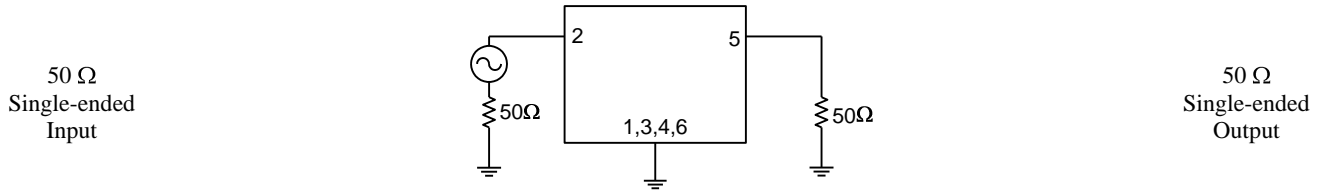

Notes:

- Actual matching values may vary due to PCB layout and parasitic


#### PC Board

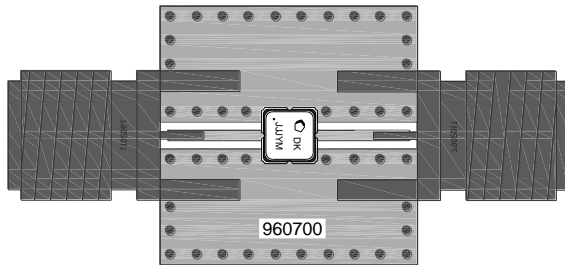

Notes:

- Top, middle & bottom layers: 1 oz copper
- Substrates: FR4 dielectric, .031" thick
- Finish plating: Nickel: 3-8 $\mu$ m thick, Gold: .03-.2 $\mu$ m thick
- Hole plating: Copper min .0008 $\mu$ m thick

#### Mounting Configuration

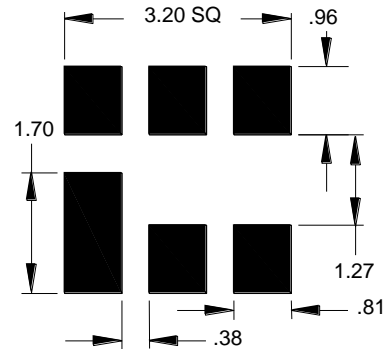







Notes:

- All dimensions are in millimeters.
- This footprint represents a recommendation only.

#### Bill of Material


Reference Desg.	Value	Description	Manufacturer	Part Number
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960700

### Typical Performance (at room temperature)

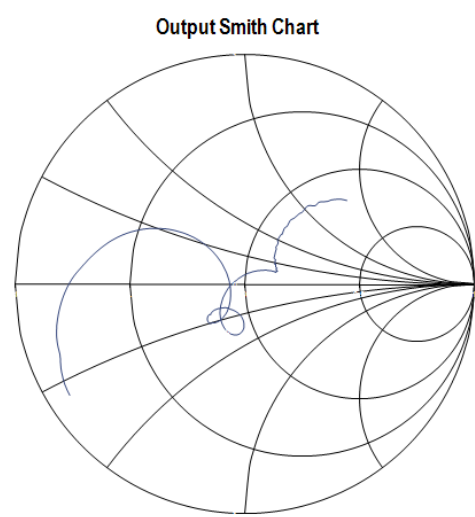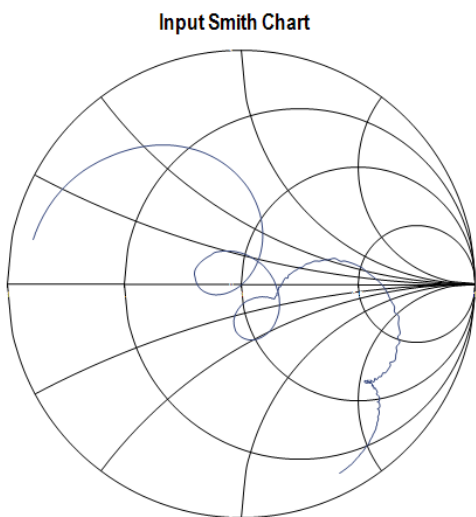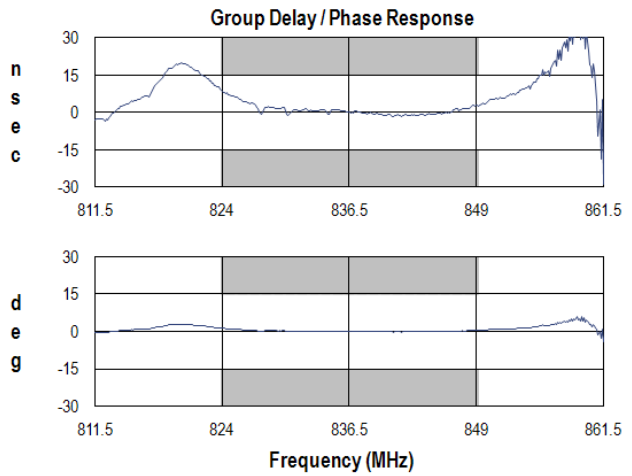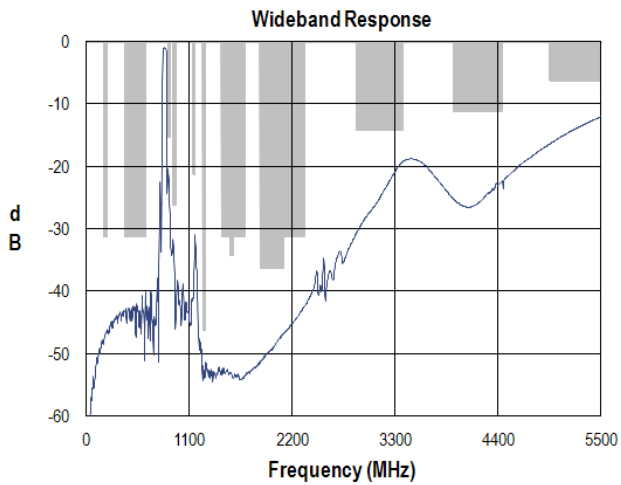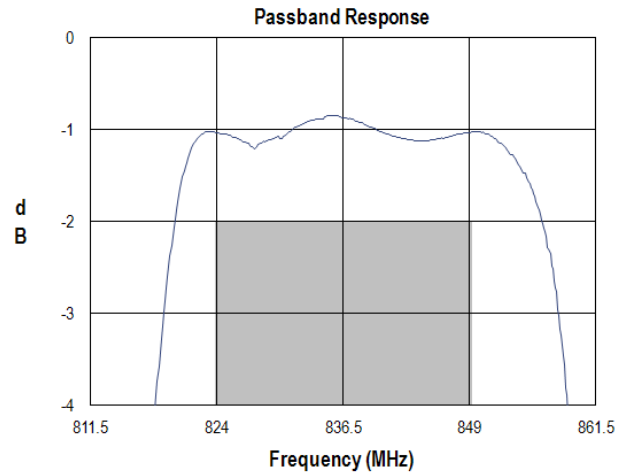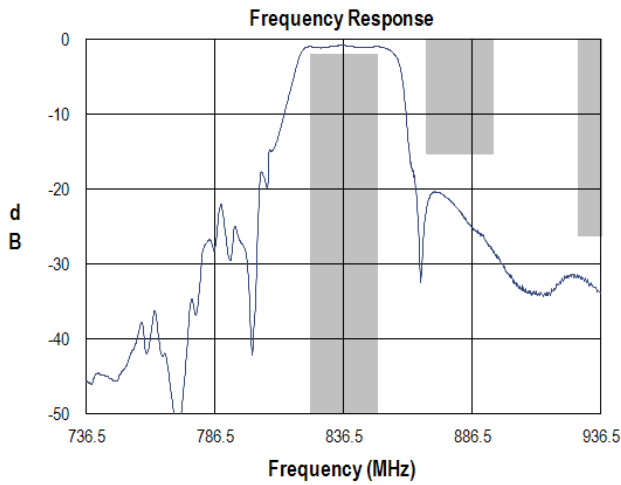

### Mechanical Information

#### Package Information, Dimensions and Marking

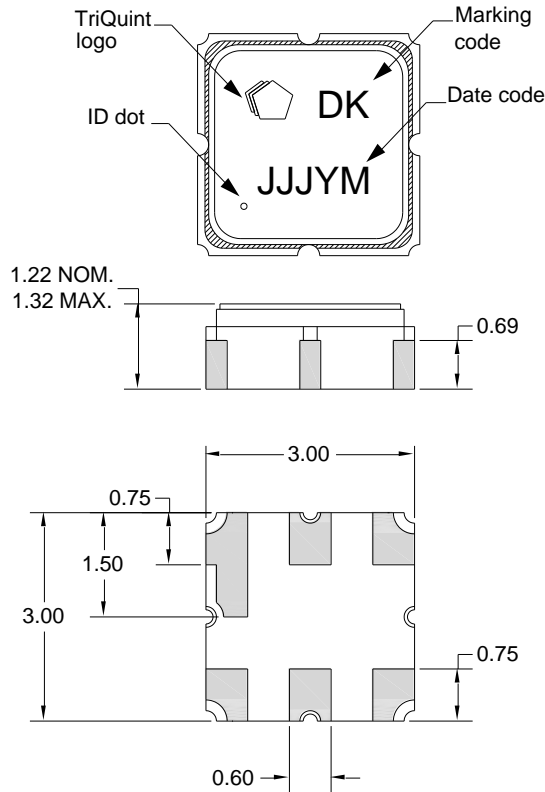

Package Style: SMP-12A  
 Dimensions: 3.00 x 3.00 x 1.22 mm



Body:  $Al_2O_3$  ceramic  
 Lid: Kovar, Ni plated  
 Terminations: Au plating 0.5 - 1.0  $\mu m$ , over a 2-6  $\mu m$  Ni plating

All dimensions shown are nominal in millimeters  
 All tolerances are  $\pm 0.15 mm$  except overall length and width  $\pm 0.10 mm$

The date code consists of: day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

#### Tape and Reel Information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

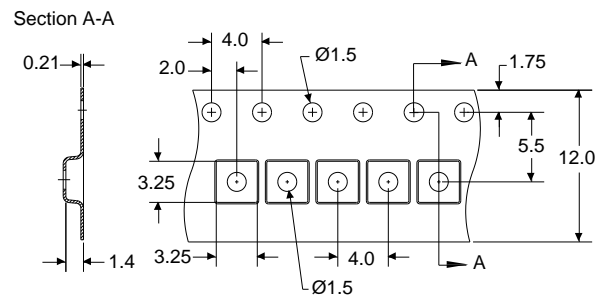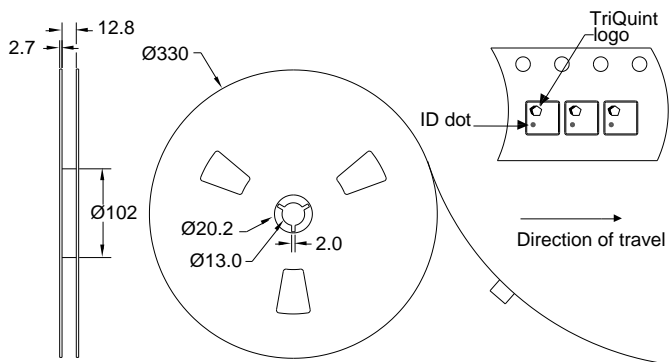

## Product Compliance Information

### ESD Information



#### Caution! ESD-Sensitive Device

ESD Rating: 1A

Value: Passes  $\geq 400$  V min.  
 Test: Human Body Model (HBM)  
 Standard: JEDEC Standard JESD22-A114

ESD Rating: B

Value: Passes  $\geq 250$  V min.  
 Test: Machine Model (MM)  
 Standard: JEDEC Standard JESD22-A115

### MSL Rating

Devices are Hermetic, therefore MSL is not applicable

### Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)      Tel: +1.407.886.8860  
 Email: [info-sales@tqs.com](mailto:info-sales@tqs.com)      Fax: +1.407.886.7061

For technical questions and application information:

Email: [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sub-GHz Development Tools](#) category:*

*Click to view products by [Qorvo](#) manufacturer:*

Other Similar products are found below :

[EVAL-ADF7021DBJZ](#) [EVAL-ADF7021-NDBZ2](#) [EVAL-ADF7021-VDB3Z](#) [EVAL-ADF7023DB3Z](#) [MICRF219A-433 EV](#) [MICRF220-433 EV](#) [AD6679-500EBZ](#) [EVAL-ADF7901EBZ](#) [EVAL-ADF790XEBZ](#) [110976-HMC453QS16G](#) [STEVAL-IKR002V7D](#) [MAX2602EVKIT+](#) [MAX1472EVKIT-315](#) [MAX1479EVKIT-315](#) [STEVAL-IKR002V3D](#) [MAX7042EVKIT-315+](#) [MAX2902EVKIT#](#) [MAX9947EVKIT+](#) [MAX1470EVKIT-315](#) [SKY66188-11-EK1](#) [SKY66013-11-EVB](#) [EVAL-ADF7023DB5Z](#) [DRF1200/CLASS-E 1096](#) [1098](#) [MDEV-900-PRO](#) [DVK-SFUS-1-GEVK](#) [DVK-SFUS-API-1-GEVK](#) [US-SIGFOX-GEVB](#) [STEVAL-IKR002V2D](#) [107755-HMC454ST89](#) [DM182017-2](#) [110961-HMC453ST89](#) [DM182017-1](#) [SX1272MB2DAS](#) [3179](#) [DC689A](#) [DC1513B-AB](#) [3229](#) [3230](#) [3231](#) [3232](#) [DC1250A-AA](#) [DC1513B-AC](#) [DC1513B-AD](#) [DC1513B-AA](#) [TEL0075](#) [131903-HMC921LP4E](#) [EU-SIGFOX-GEVB](#) [856512-EVB](#)