


### **Applications**

- · Wireless Infrastructure
- AMPS, CDMA and TDMA
- General Purpose RF Filter
- 4G, Multi-Standard
- UMTS Bands 1 and 10 Downlink
- Repeaters

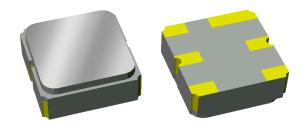

SMP-12, 3.00 x 3.00 x 1.22 mm


### **Product Features**

- 60 MHz Bandwidth
- · High Attenuation
- Single-ended Operation
- 50 Ohm Impedance
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- · Hermetically Sealed
- RoHS Compliant, Pb-Free (



# **Functional Block Diagram**

#### Top View



# **General Description**

The 856738 is a Surface Acoustic Wave (SAW) based filter suitable for UMTS band 1 and 10 downlink.

856738 is specifically designed to meet the high performance expectations of insertion loss and rejection for UMTS downlink systems under all operating conditions.

This filter is housed in a compact, industry standard 3x3 mm footprint.

Low insertion loss, coupled with high attenuation makes this filter an ideal choice for Base Station Applications.

This filter is part of TriQuint's wide portfolio of RF filters.

# **Pin Configuration - Single Ended**

Pin No.	Label
2	Input
5	Output
1.3,4,6	Ground

# **Ordering Information**

Part No.	Description		
856738	2140 MHz SAW Filter		
856738-EVB	Evaluation board		

Standard T/R size = 5000 units/reel



# **Absolute Maximum Ratings**

Parameter	Rating
Storage Temperature	−40 to +85 °C
DC Voltage (instantaneous only on any port)	+5 V
Input Power (1)	+10 dBm

#### Notes:

1. Operation of this device outside the parameter ranges given may cause permanent damage.

# Electrical Specifications (1,2,3)

Test conditions unless otherwise noted: (2) Temp= -30 °C to +85 °C

Parameter (3)	Conditions	Min	Typ <sup>(4)</sup>	Max	Units
Center Frequency		-	2140	-	MHz
Insertion Loss	2110 – 2170 MHz	-	2.3	3.5	dB
Amplitude Variation	2110 – 2170 MHz		0.9	1.5	dB p-p
	10 – 1980 MHz	25	27	-	
	1980 – 2025 MHz	30	33	-	
Absolute Attenuation	2025 – 2050 MHz	25	31	-	
(relative to zero dB)	2225 – 2260 MHz	30	36	-	dB
	2260 – 3000 MHz	25	30	-	
Input/Output Return Loss	2110 – 2170 MHz	8	12	-	dB-
Source Impedance (5)	single-ended	-	50	-	Ohms
Load Impedance (5)	single-ended	-	50	-	Ohms


#### Notes:


- 1. All specifications are based on the test circuit shown below.
- 2. Production test is performed at room temp. to a guard-banded specification to ensure electrical compliance over temperature.
- 3. Electrical margin has been built into the design to account for variation due to temperature drift and manufacturing tolerances.
- 4. Typical values are based on average measurements at room temperature
- 5. This is the optimum impedance in order to achieve the performance shown.



### **Evaluation Board**

# **Matching Schematics**

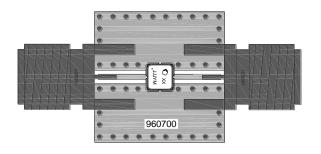



#### Notes:


- 1. No impedance matching required.
- 2. PCB: Top, middle & bottom layers: 1 oz copper, Substrates:FR4 dielectric, 031" thick Finish plating: Nickel: 3-8μm thick, Gold: .03-.2μm thick Hole plating: Copper min .0008μm thick

### Bill of Material - 856738-EVB

Reference Des.	Value	Description	Manuf.	Part Number
DUT	-	2140 MHz SAW filter	TriQuint	856738
SMA	-	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	-	3-Layer	Multiple	960700

-3 of 6 -

# **PCB Mounting Pattern**




#### Notes

- 1. All dimensions are in millimeters. Angles are in degrees.
- 2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.




# **Performance Plots**

Test conditions unless otherwise noted: Temp= +25°C

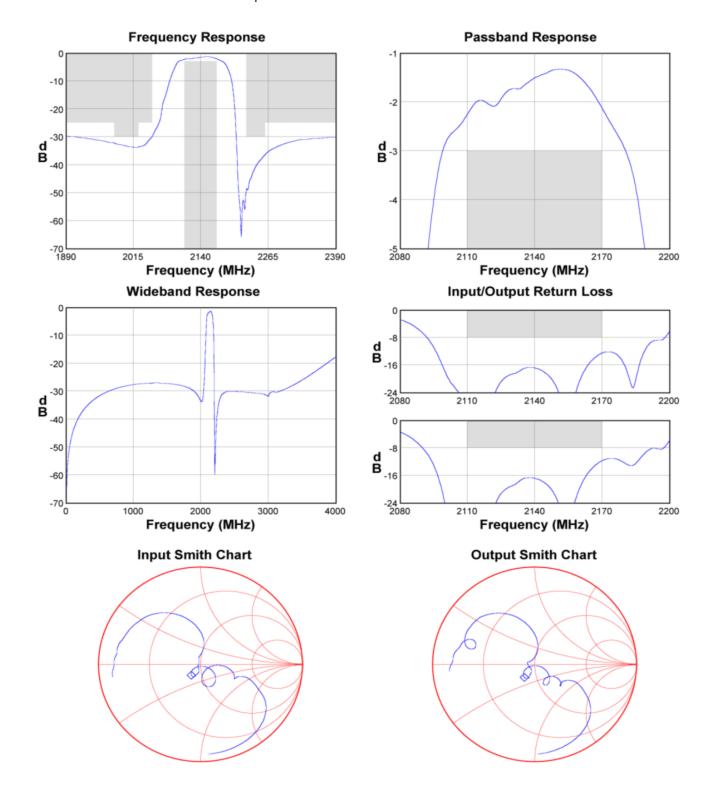



## Package Information, Marking and Dimensions

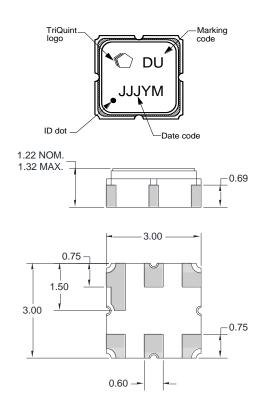

Package Style: SMP-12A

Body:  $Al_2O_3$  ceramic Lid: *Kovar*, *Ni* plated

Terminations: Au plating 0.5 - 1.0µm, over a 2-6µm Ni plating


The date code consists of JJJ =Julian day, Y = last digit of the year, and M = manufacturing site code


#### Notes:

- 1. All dimensions shown are typical in millimeters
- 2. All tolerances are ±0.15mm except overall length and width ±0.10mm
- 3. An asterisk (\*) in front of the marking code indicates prototype.

# **Tape and Reel information**

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

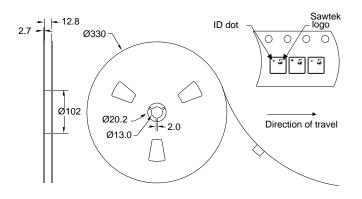

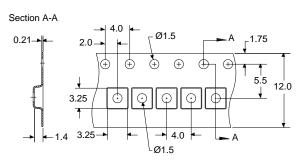



### **Product Compliance Information**

### **ESD Sensitivity Ratings**



Caution! ESD-Sensitive Device

ESD Rating: Class 0A

Value: Passes ≤ 100 V

Test: Electrostatic Discharge Sensitivity Testing,

Human Body Model (HBM) - component level

Standard: ESDA/JEDEC JS-001-2012

ESD Rating: Class A

Value: Passes ≤ 50 V Test: Machine Model (MM)

Standard: JEDEC Standard JESD22-A115

### **MSL** Rating

Not applicable. Hermetic package.

### **Solderability**

Compatible with both lead-free (260°C maximum reflow temperature) and tin/lead (245°C maximum reflow temperature) soldering processes.

Refer to <u>Soldering Profile</u> for recommended quidelines.

### **RoHs Compliance**

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>0<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## **Contact Information**

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: <u>www.triquint.com</u> Tel: +1.407.886.8860 Email: <u>info-sales@tgs.com</u> Fax: +1.407.886.7061

For technical questions and application information:

Email: flapplication.engineering@tqs.com

## **Important Notice**

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Development Tools category:

Click to view products by Qorvo manufacturer:

Other Similar products are found below:

MAAM-011117 MAAP-015036-DIEEV2 EV1HMC1113LP5 EV1HMC6146BLC5A EV1HMC637ALP5 EVAL-ADG919EBZ ADL5363EVALZ LMV228SDEVAL SKYA21001-EVB SMP1331-085-EVB EV1HMC618ALP3 EVAL01-HMC1041LC4 MAAL-011111-000SMB
MAAM-009633-001SMB MASW-000936-001SMB 107712-HMC369LP3 107780-HMC322ALP4 SP000416870 EV1HMC470ALP3
EV1HMC520ALC4 EV1HMC244AG16 MAX2614EVKIT# 124694-HMC742ALP5 SC20ASATEA-8GB-STD MAX2837EVKIT+
MAX2612EVKIT# MAX2692EVKIT# EV1HMC629ALP4E SKY12343-364LF-EVB 108703-HMC452QS16G EV1HMC863ALC4 119197HMC658LP2 EV1HMC647ALP6 ADL5725-EVALZ 106815-HMC441LM1 EV1HMC1018ALP4 UXN14M9PE MAX2016EVKIT
EV1HMC939ALP4 MAX2410EVKIT MAX2204EVKIT+ EV1HMC8073LP3D SIMSA868-DKL SIMSA868C-DKL SKY65806-636EK1
SKY68020-11EK1 SKY67159-396EK1 SKY66181-11-EK1 SKY65804-696EK1 SKY13396-397LF-EVB