



SDHL CONNECTOR



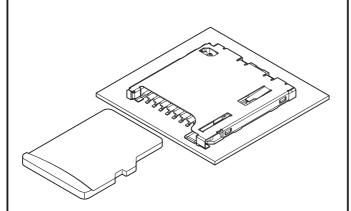

This is the connector for micro-SD card connector in which mounting height of 1.4mm maximum is kept and push-push mechanism is adopted.

Connector



Model No.	Q'ty / reel
SDHL-8BNS-K-363-A0-TB (HF) N	1,500
SDHL-8BNS-K-363-A0-ETB (HF)	1,500

Material and Finish

Contact, Switch: Copper alloy, nickel-undercoated, nickel-palladium alloy-plated Switch for signal: Mating part; gold-plated Solder tail; gold-plated

Shell: Stainless, nickel-undercoated, selective gold-plated

RoHS compliance

Note: This products listed above are supplied on embossed-tape.

Specifications -

Current rating: 0.5A AC, DC
Voltage rating: 100V AC, DC
Temperature range: -25°C to +85°C

(including temperature rise in applying

electrical current)

• Contact resistance: Initial value/100m Ω max.

After environmental testing/40m Ω max.

(variation from initial value)


• Insulation resistance: 1,000M Ω min. • Withstanding voltage: 500V AC/minute

* Compliant with RoHS.

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.

PC board layout

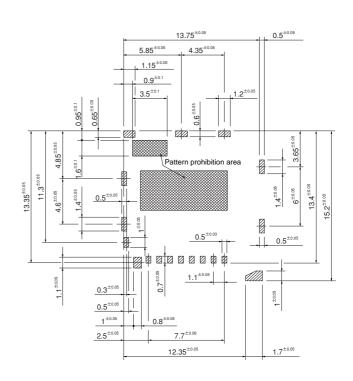

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for jst manufacturer:

Other Similar products are found below:

GS3-0.5 GS8-6 B3B-ZR B4B-ZR B5B-XH-A B5B-ZR B6B-ZR-SM4-TF B7B-XH-A B8B-XH-A B8B-ZR BM02B-SRSS-TB BM06B-SRSS-TB BM10B-SRSS-TB FVGS5-6 B2B-ZR-SM4-TF B34B-PHDSS-B(LF)(SN) B3B-ZR-SM4-TF B5B-ZR-SM4-TF B6B-XH-A B7B-ZR-SM4-TF B8PS-VH BM04B-SRSS-TB BM05B-SRSS-TB IDH-KR-12 10HR-4K WC-ZE2426 WC-691 FVDDF5.5-375A (LF) FVGS12-6 (LF) FVWS2-S3.3 (LF) FVWS5.5-5 (LF) B6PS-VH(LF)(SN) FNGS12-6 TWE0.5-8 FVGS4-1 (LF) WC-GVH2630 WC-PUD2 S10B-PH-SM4-TB(LF)(SN) B2B-EH-A-TW (LF)(SN) B4B-EH-A-TW (LF)(SN) B4B-XH-TW (LF)(SN) B9B-XH-A BM02B-GHS-TBT BM03B-GHS-TBT BM04B-GHS-TBT BM06B-GHS-TBT BM08B-GHS-TBT SM10B-GHS-TB