


Split Loom

Flame Retardant Polyethylene, Gray

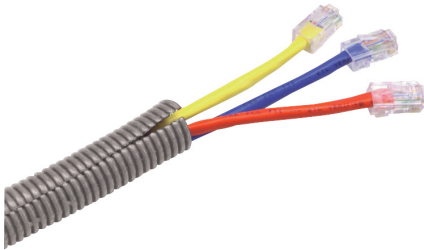



Description:

Flexible convoluted tubing / conduit manufactured from a flame retardant polyethylene resin.

Characteristics:

Flexibility : Excellent
 Abrasion Resistance : Good
 Chemical Resistance : Good
 Operating Temperature : -40°C to +93°C (-40°F to 200°F)

Typical Physical Properties	Test Method	Value	Units
Specific Gravity/Density	ASTM D792	1.005	-
Elongation @ Break	ASTM D638	945	%
Elongation @ Yield	ASTM D638	167	%
Tensile Strength @ 25C	ASTM D638	14.99619	MPa
2% Secant Modulus	-	-	-
Flexural Modulus	ASTM D790	240	MPa
Melting Point	ASTM D3418	239 (115)	°F (°C)
Notched Izod Impact Test	ASTM D256	10	ft lb/in
Heat Deflection Temperature @66psi	ASTM D648	104 (40)	°F (°C)
Heat Deflection Temperature @264psi	ASTM D648	122 (50)	°F (°C)

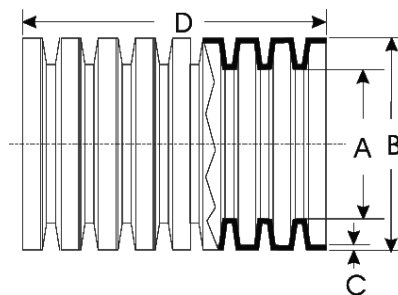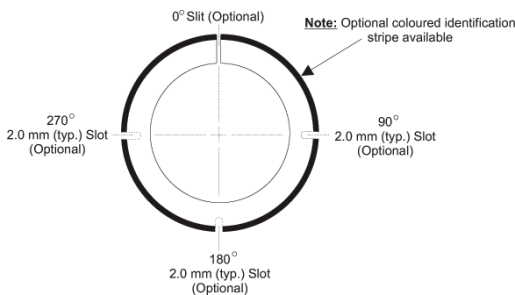

Split Loom

Flame Retardant Polyethylene, Gray



Product Dimensions:

Part Number	Nominal ID Diameter	Dia. Code	Dimension "A" I.D.		Dimension "B" O.D.		Dim. "C" Wall Min.
			Min.	Max.	Min.	Max.	
1429	1/4" (6mm)	014	6.02 (0.237)	6.76 (0.266)	9.45 (0.372)	10.16 (0.4)	0.11 (0.004)
1430	3/8" (9mm)	038	8.66 (0.341)	9.65 (0.38)	12.59 (0.496)	13.36 (0.526)	0.12 (0.005)
1431	1/2" (13mm)	012	12.01 (0.473)	13.11 (0.516)	16.87 (0.664)	17.78 (0.7)	0.12 (0.005)
1432	5/8" (16mm)	058	15.32 (0.603)	16.23 (0.639)	20.36 (0.802)	21.26 (0.837)	0.12 (0.005)
1433	3/4" (19mm)	034	17.96 (0.707)	19.28 (0.759)	24.13 (0.95)	25.12 (0.989)	0.12 (0.005)
1434	1" (25mm)	100	25.91 (1.02)	27.16 (1.069)	31.78 (1.251)	33.13 (1.304)	0.15 (0.006)

Dimensions : Millimetres (Inches)

Note:

- (A) Product tolerances are general and are designed to encompass all available materials. Tighter tolerances may be available for a specific material.
- (B) Product with an I.D.>1.5" will not meet the std. Cut length tolerances listed above. Special cut length tolerance will be given on a case to case basis.

Dimension "D" Cut-To-Length Specifications	
Less than or equal to 400mm +/- 10mm	Greater than 400mm +/- 2.5% of target length

Part Number Table

Description	Part Number
1/4" Gray Flame Retardant Polyethylene Split Loom	1429
3/8" Gray Flame Retardant Polyethylene Split Loom	1430
1/2" Gray Flame Retardant Polyethylene Split Loom	1431
5/8" Gray Flame Retardant Polyethylene Split Loom	1432
3/4" Gray Flame Retardant Polyethylene Split Loom	1433
1" Gray Flame Retardant Polyethylene Split Loom	1434

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

X-ON Electronics

Authorized Distributor

Click to view similar products for [LED Lighting Development Tools](#) category.

Click to view products by [Pro Power](#) manufacturer.

Other Similar products are found below :

[AS1119DB](#) [LM3561EVM](#) [LP5523EVMNOPB](#) [RDK295](#) [MIC2873YCSEV](#)

[LM3405AXMYEVAL](#) [TLC59282EVM118](#) [LED7CGM422](#) [LED7RGM318](#)

[LP55231SQEVM](#) [DK114N1](#) [TPS75105EVM174](#) [TPS61197EVM](#) [TPS61176EVM566](#)

[TLC59116EVM390](#) [LM3407EVALNOPB](#) [2946](#) [MIC2870YFTEV](#) [105020073](#) [DC1436A](#)

[DC1268BA](#) [MAX25600EVKIT](#) [DC1406A](#) [DC2013A](#) [DC2361A](#)