

FEATURES


- Resistances from 0.025Ohm to 10kOhms
- Power Rating to 25Watt
- Resistance Tolerances to ±1%
- TCR to ±100ppm/K
- Load Stability to 0.5%
- TO-126 Housing (D-Pak)
- Solder Reflow Secure at 260°C / 20s



TABLE 1 – SPECIFICATIONS					
TYPE		NPS 2-T126B			
Resistance Range		0.025 to 0.049Ohms	0.05 to 0.099Ohms	0.1 to 0.99Ohms	1.0 to 10kOhms
Power Rating	With heatsink	25W			
Tolerances (others upon request)		2% / 5%		1% / 2% / 5%	
Thermal Resistance		6.0 K/W			
Stability (1000h)		0.5%			
Temperature Coefficient		±500 ppm/K	±400 ppm/K	±300 ppm/K	±100 ppm/K
Voltage Proof		2.0 kVDC			
Operating Temperature Range		-40°C to 175°C			
Resistor Material		Thick Film			
Substrate		Al ₂ O ₃			
Backplate		Copper / Nickel-plated			
Housing		PPS			
Connector Material		Cu / Ni-flash / lead-free tinned			
Terminals		2 (standard contact S)			
Reflow soldering		lead free soldering time above 220°C max. 90 s max. temperature 245°C and JEDEC-J-STD-020			

ORDERING INFORMATION
Part Number - Resistance - Contact - Tolerance
NPS 2-T126B 1R100 S 1%

FIGURE 1 – DERATING

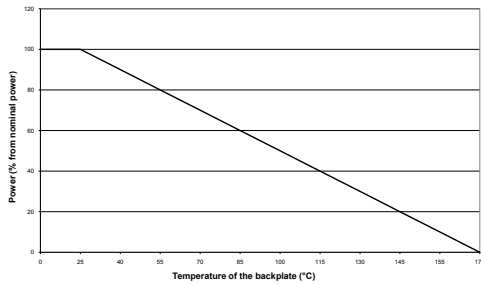


Power Rating Notes -

The NPS Series Resistors must be attached to a suitable heat-sink. The maximum internal resistor temperature is 175°C. To specify an appropriate heatsink use the following formula :


$$R_{0H} = \frac{T_{MAX} - (P \times R_{0R}) - T_A}{P}$$

Where: R_{0H} = Thermal Resistance of Heatsink (K/W)
 R_{0R} = Thermal Resistance of Resistor (K/W)
 T_{MAX} = Maximum Temperature of Resistor
 T_A = Ambient Temperature of Heatsink (°C)
 P = Power Through Resistor (W)

FIGURE 2 – DIMENSIONS in mm (inches)

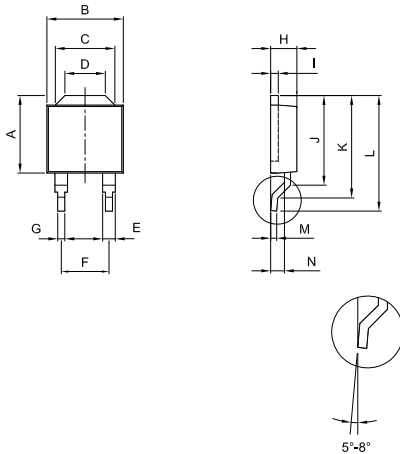

Dimension	
A ±0.2 (±0.008)	8.26 (0.33)
B ±0.2 (±0.008)	8.13 (0.32)
C ±0.1 (±0.004)	6.35 (0.25)
D ±0.1 (±0.004)	4.31 (0.17)
E ±0.1 (±0.004)	1.35 (0.05)
F ±0.1 (±0.004)	5.08 (0.20)
G ±0.1 (±0.004)	0.76 (0.03)
H ±0.1 (±0.004)	2.79 (0.11)
I ±0.1 (±0.004)	0.8 (0.03)
J ±0.2 (±0.008)	9.55 (0.38)
K ±0.2 (±0.008)	10.92 (0.43)
L ±0.2 (±0.008)	12.32 (0.49)
M ±0.1 (±0.004)	0.6 (0.02)
N ±0.1 (±0.004)	1.47 (0.06)

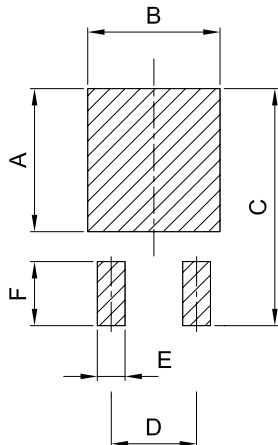

Dimension	
A	8.51 (0.335)
B	7.87 (0.310)
C	14.1 (0.555)
D	5.08 (0.200)
E	1.65 (0.065)
F	3.81 (0.150)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [powertron](#) manufacturer:

Other Similar products are found below :

[FPR 2-T218 2R000 C 1%](#) [FPR 4-T227 0R010 G 1% Q](#) [NPS 2-T126B 10R00 S 1%](#) [NPS 2-T126B 47R00 S 1%](#) [KHR 2-T227 10R00 G 1%](#)
[FPS 4-T220 0R500 S 1% Q](#) [FPR 2-T218 3R000 C 1%](#) [FPR 4-T221 0R220 S 1% Q](#) [SHR 4-3825 0R010 A 1% M](#) [USR 2-T220B 500R0 S 0.1%](#)
[FHR 4-3825 0R001 A 1% Q](#) [KHR 2-T227 100R0 G 1%](#) [USR 2-T220B 50R00 S 0.1%](#) [FHR 4-2321 0R001 S 1% Q](#) [USR 4-4020 1R000 D 1%](#)
[PCS 301 0R100 S 1%](#) [FPS 4-T220 0R005 S 1% Q](#) [SHR 4-3825 0R100 A 1% M](#) [FPR 2-T218 4R000 C 1%](#) [FPR 4-T227 0R001 G 1% Q](#) [FPS 4-](#)
[T220 0R010 S 1% Q](#) [SPR 4-T220 0R100 S 1% M](#) [FHR 4-3825 0R010 A 1% Q](#) [FHR 4-2321 0R010 S 1% Q](#) [NPS 2-T126B 50R00 S 1%](#)