

Product Description

Qorvo's TGS2355 is a Single-Pole, Double-Throw (SPDT) reflective switch fabricated on Qorvo's QGaN25 0.25um GaN on SiC production process.

Operating from 0.5 to 6 GHz, the TGS2355 provides up to 100 W input power handling with < 1 dB insertion over most of the operating band and greater than 40 dB isolation.

The TGS2355 is available in a small 2.14 x 2.50 mm die size and requires very little control current allowing for easy system integration without impacting system power budgets.

The TGS2355 is ideally suited for high power switching applications across both defense and commercial applications.




Product Features

- Frequency Range: 0.5 - 6 GHz
- Insertion Loss: < 1.3 dB
- Power Handling: 50 dBm (Pulsed)
- Isolation: 40 dB typical
- Control Voltages: 0 V/-40 V (from either side of the MMIC)
- Switching Speed: < 50 nS
- Reflective Switch
- Die Dimensions: 2.14 mm x 2.50 mm x 0.10 mm

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Block Diagram

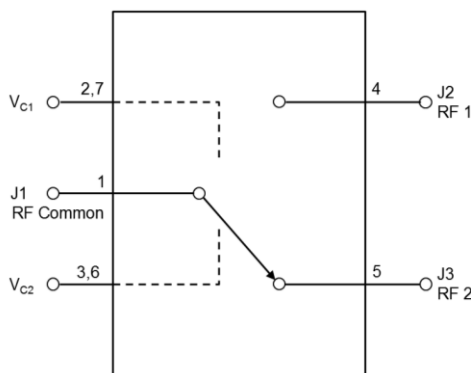

Applications

- Commercial and Military Radar
- Communications
- Electronic Warfare
- Test Instruments
- General Purpose
- High Power Switching

Ordering Information

Part No.	Description
TGS2355	0.5-6 GHz 100 Watt GaN Switch

Absolute Maximum Ratings

Parameter	Value
Control Voltage (V_C)	-50 V
Control Current (I_C)	-3.5 / +3.5 mA
Power Dissipation	36.8 W
RF Input Power (pulsed, 10% Duty Cycle, 20 μ s pulse width)	51 dBm
Mounting Temperature (30 sec)	320 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Frequency	0.5		6	GHz
Input Power Handling (Pulsed)		50		dBm
Control Voltage		-40		V
Temperature Range	-40	25	+85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Parameter	Conditions ⁽¹⁾	Min	Typ	Max	Units
Operational Frequency Range		0.5		6	GHz
$P_{0.1dB}$	Pulsed Input Power		50		dBm
Control Current (I_C)			1.0		mA
Insertion Loss	On-State		1.0		dB
Input Return Loss – Common Port Return Loss	On-State		15		dB
Output Return Loss – Switched Port Return Loss	On-State		15		dB
Isolation	Off-State		40		dB
Output Return Loss – Isolated Port Return Loss	Off-State		2.5		dB
Switching Speed (10-90%, 90-10%, $V_C = -20V$)			50		ns
Control Voltage			-40	-48	V
Insertion Loss Temperature Coefficient			0.003		dB/°C

Notes:

1. Test conditions unless otherwise noted: Temp = +25°C. $Z_0 = 50 \Omega$, $V_C = -40 V$







Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ^(1,2)	$T_{BASE} = 85 \text{ °C}$, $V_{C1} = 0 V$, $V_{C2} = -40 V$, $P_{IN} = 100 W$,	1.3	°C/W
Channel Temperature (T_{CH}) ^(1,2)	$P_{DISS} = 29.3 W$, Pulsed Power: $PW = 20 \mu s$, $DC = 10 \%$	123	°C

1. MMIC soldered to 20 mil thick Cu-Mo carrier plate using AuSn solder. Thermal resistance is determined from the channel to the back of the die (fixed 85 °C temp.).
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)





Performance Plots – Small Signal

Test conditions unless otherwise noted: $V_{C1} = 0\text{ V}$, $V_{C2} = -40\text{ V}$, CW Input, Temp = +25 °C.

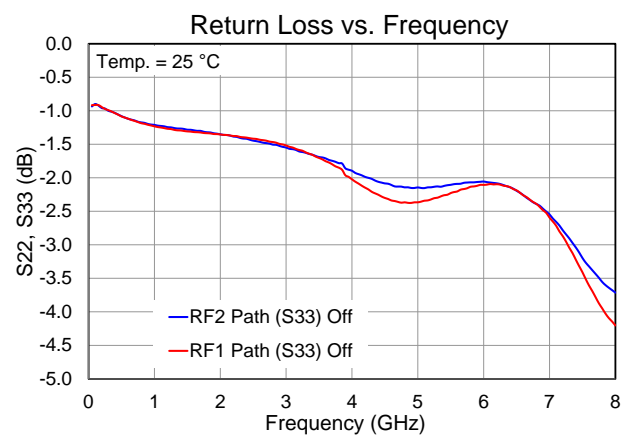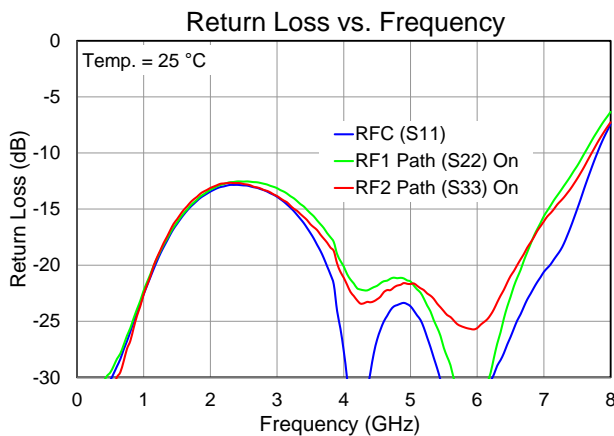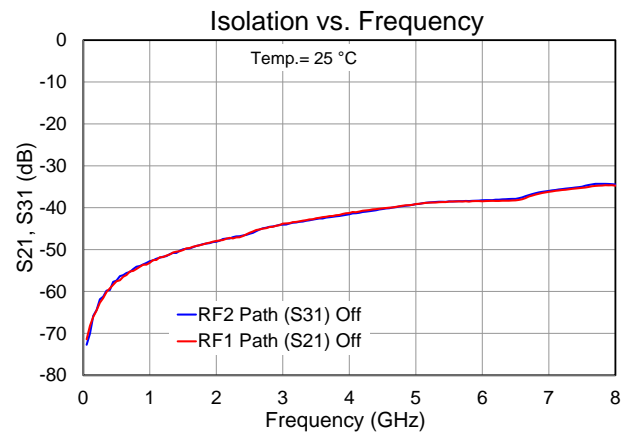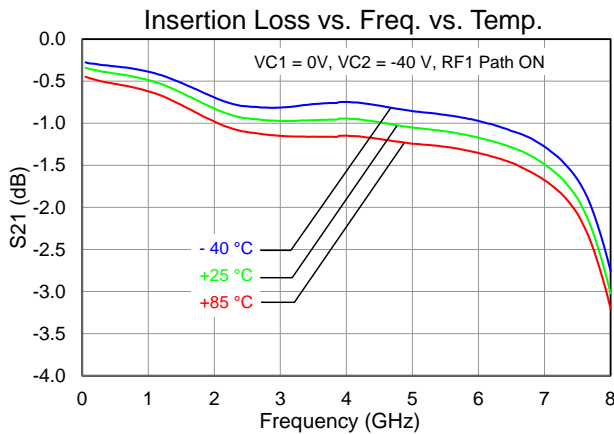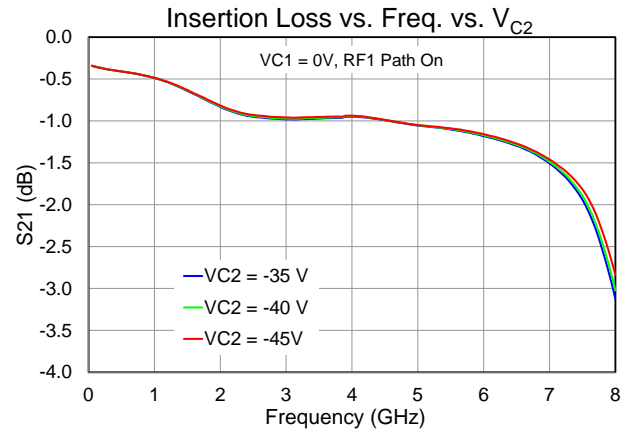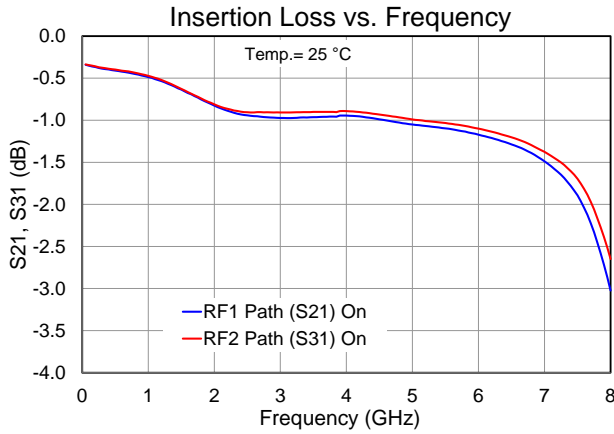


Performance Plots – Large Signal

Test conditions unless otherwise noted: $V_{C1} = 0\text{ V}$, $V_{C2} = -40\text{ V}$, Pulsed RF Input - $PW=20\text{ }\mu\text{sec}$, Duty Cycle=10%, Temp= $+25\text{ }^\circ\text{C}$.

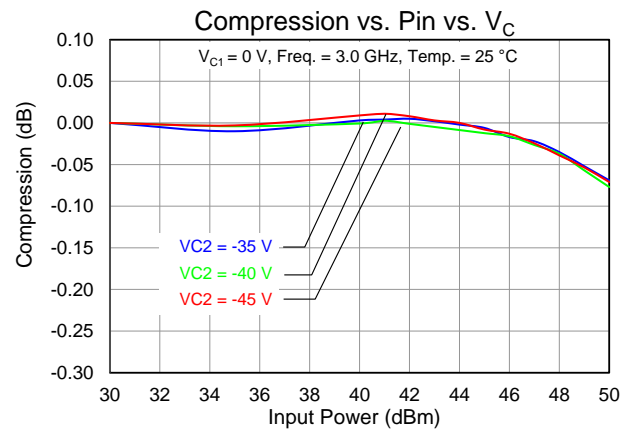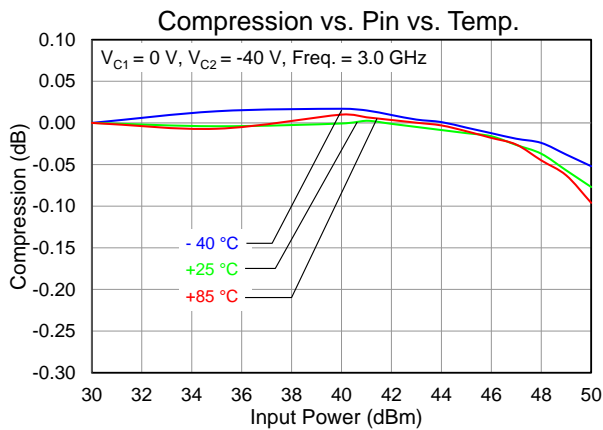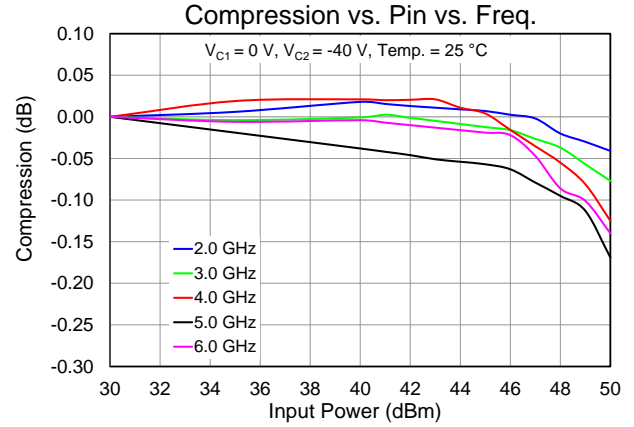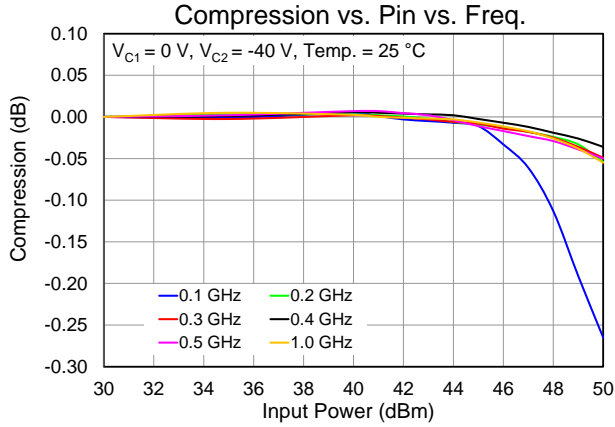

Applications Circuit

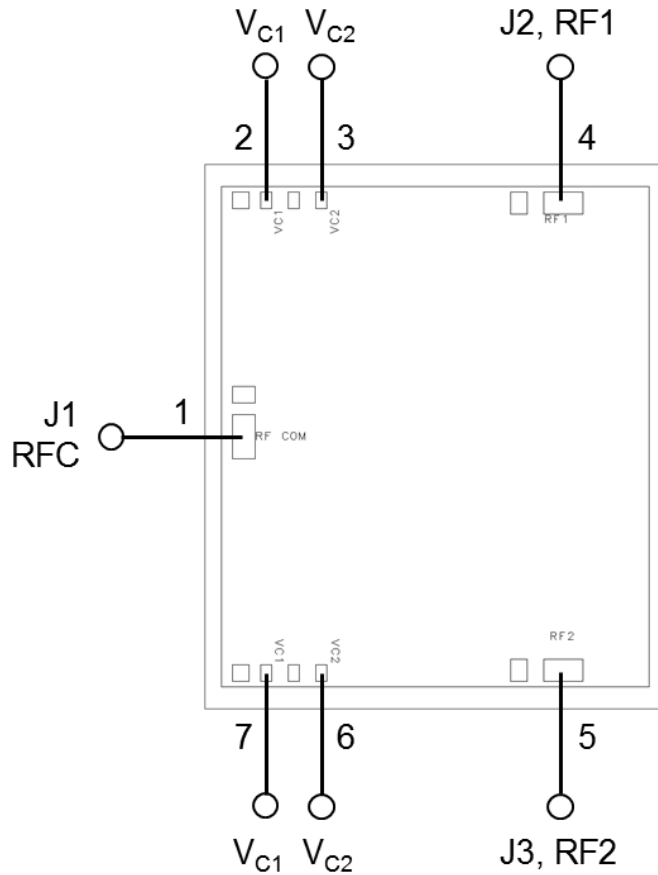

Notes:

DC blocking capacitors are required on all RF ports.

VC1 can be biased from either bond pad 2 or 7, and the non-biased bond pad can be left open.
 VC2 can be biased from either bond pad 3 or 6, and the non-biased bond pad can be left open.



This switch can be configured as a Single Pole, Single Throw (SPST) by terminating one unused RF switched port with a 50 Ohm load.

Function Table


RF Path	State	V _{C1}	V _{C2}
RFC to RF1	On-State (Insertion Loss)	0 V	-40 V
	Off-State (Isolation)	-40 V	0 V
RFC to RF2	On-State (Insertion Loss)	-40 V	0 V
	Off-State (Isolation)	0 V	-40 V

Evaluation Board (EVB) Layout Assembly Using Coined PCB


PC Board Layout

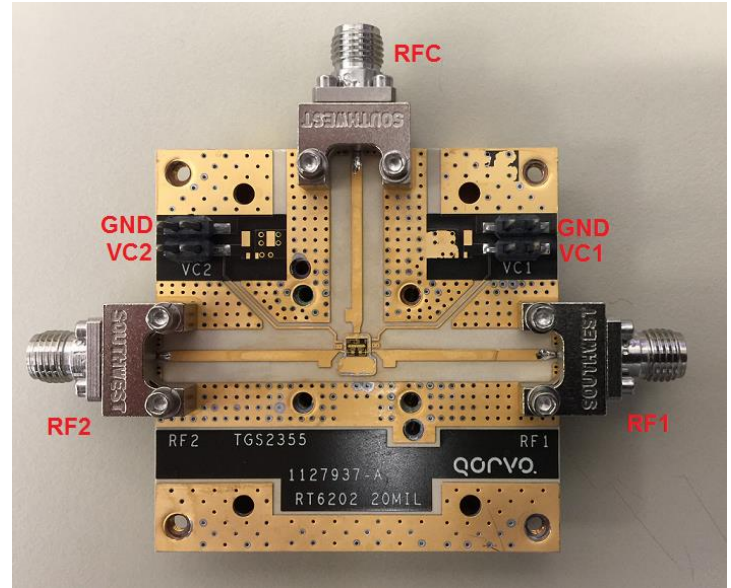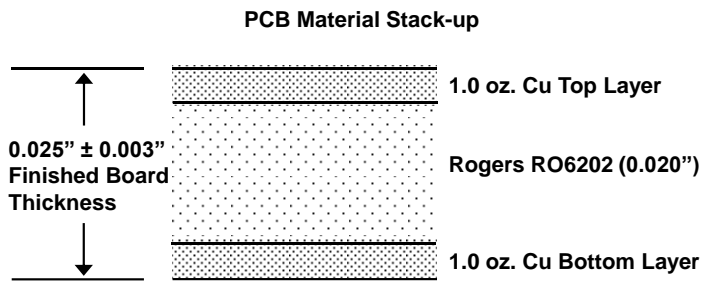

MMIC EVB Mounting Detail

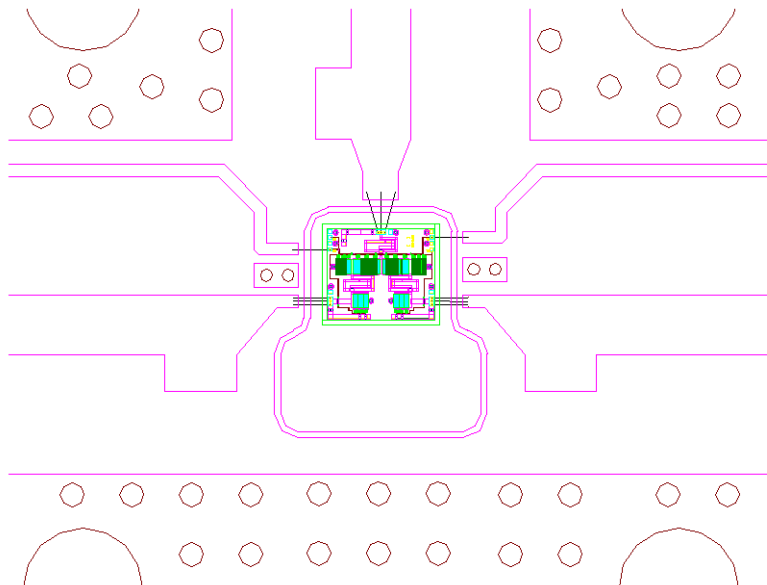

Mechanical Drawing and Bond Pad Description

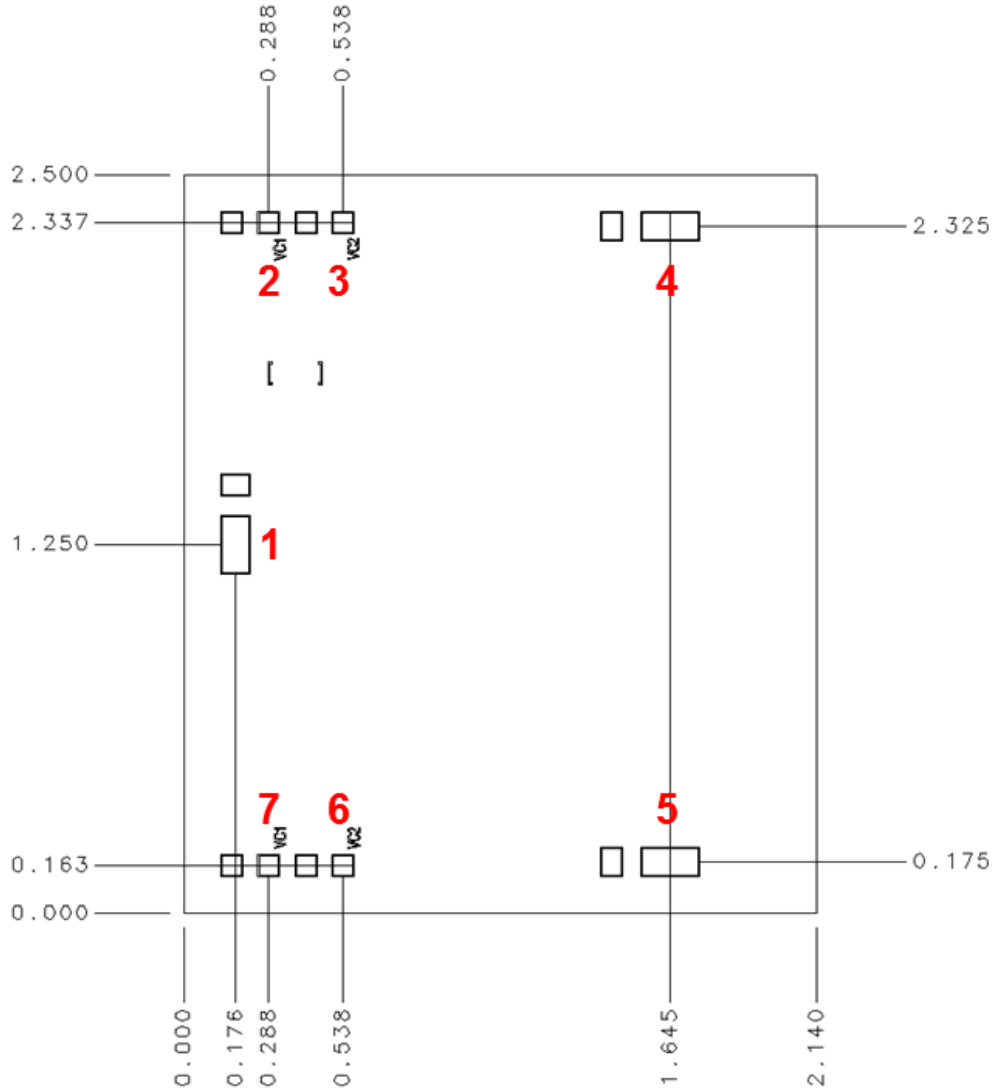

Unit: millimeters
 Thickness: 0.10
 Die x, y size tolerance: +/- 0.050
 Chip edge to bond pad dimensions are shown to center of pad

Pin No.	Symbol	Description	Pad Size (mm)
1	RF1	RF common port; matched to 50 Ω; DC coupled	0.100 x 0.200
2, 7	VC1	Control voltage 1	0.075 x 0.075
3, 6	VC2	Control voltage 2	0.075 x 0.075
4	RF2	RF switched port 1; matched to 50 Ω; DC coupled	0.200 x 0.100
5	RF1	RF switched port 2; matched to 50 Ω; DC coupled	0.200 x 0.100

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e., conductive epoxy) can be used in low-power applications.
- Curing should be done in a convection oven; proper exhaust is a safety concern.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300 °C to 3–4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonic are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

Handling Precautions

Parameter	Rating	Standard	 Caution! ESD-Sensitive Device
ESD – Human Body Model (HBM)	1A	ESDA / JEDEC JS-001	

Solderability

Use only AuSn (80/20) solder and limit exposure to temperatures above 300 °C to 3-4 minutes, maximum.

RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Tel: 1-844-890-8163

Web: www.qorvo.com

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2021 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Switch ICs](#) category:

Click to view products by [Qorvo](#) manufacturer:

Other Similar products are found below :

[MASW-008853-TR3000](#) [BGS13SN8E6327XTSA1](#) [BGSX210MA18E6327XTSA1](#) [SKY13446-374LF](#) [SW-227-PIN](#) [CG2185X2](#) [CG2415M6](#)
[MA4SW410B-1](#) [MASW-002102-13580G](#) [MASW-008543-001SMB](#) [MASW-008955-TR3000](#) [TGS4307](#) [BGS 12PL6 E6327](#)
[BGS1414MN20E6327XTSA1](#) [BGS1515MN20E6327XTSA1](#) [BGSA11GN10E6327XTSA1](#) [BGSX28MA18E6327XTSA1](#) [HMC199AMS8](#)
[SKY13374-397LF](#) [SKY13453-385LF](#) [CG2415M6-C2](#) [HMC986A-SX](#) [SW-314-PIN](#) [UPG2162T5N-E2-A](#) [SKY13416-485LF](#)
[MASWSS0204TR-3000](#) [MASWSS0201TR](#) [MASWSS0181TR-3000](#) [MASW-007588-TR3000](#) [MASW-004103-13655P](#) [MASW-003102-](#)
[13590G](#) [MASWSS0202TR-3000](#) [MA4SW310B-1](#) [MA4SW110](#) [SW-313-PIN](#) [CG2430X1](#) [SKY13321-360LF](#) [SKY13405-490LF](#)
[SKYA21001](#) [BGSF 18DM20 E6327](#) [SKY13415-485LF](#) [MMS008PP3](#) [BGS13PN10E6327XTSA1](#) [SKY13319-374LF](#)
[BGS14PN10E6327XTSA1](#) [SKY12213-478LF](#) [SKY13404-466LF](#) [MASW-011060-TR0500](#) [SKYA21024](#) [SKY85601-11](#)