


# Quectel EC25 Series

IoT/M2M-optimized

LTE Cat 4 Module

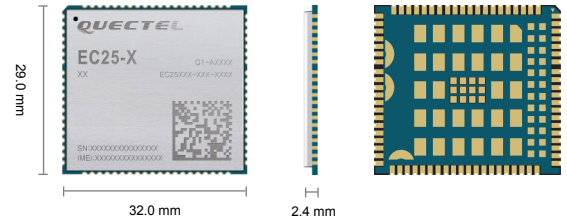

Quectel EC25 is a series of LTE Cat 4 module optimized specially for M2M and IoT applications. Adopting the 3GPP Rel. 11 LTE technology, it delivers maximum data rates up to 150 Mbps downlink and 50 Mbps uplink. Designed in the compact and unified form factor, EC25 series is compatible with Quectel multi-mode LTE Standard EC21 series/EC20 R2.1/EG25-G/EG21-G modules and UMTS/HSPA+ UC200T series modules, which allows for flexible migration among them in design and manufacturing.

EC25 series contains 12 variants: EC25-E, EC25-EU, EC25-EUX, EC25-J, EC25-A, EC25-V, EC25-AF, EC25-AFX, EC25-AFXD (Data-only), EC25-MX, EC25-AU and EC25-AUX. This makes it backward-compatible with existing EDGE and GSM/GPRS networks, ensuring that it can be connected even in remote areas devoid of 4G or 3G coverage.

EC25 series supports Qualcomm® IZat™ location technology Gen8C Lite (GPS, GLONASS, BeiDou/Compass, Galileo and QZSS). The integrated GNSS greatly simplifies product design, and provides quicker, more accurate and more dependable positioning.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB serial drivers for Windows 7/8/8.1/10, Linux, Android) extend the applicability of the module to a wide range of M2M and IoT applications such as industrial router, industrial PDA, rugged tablet PC, video surveillance, and digital signage.



## Key Features

- ✓ LTE Cat 4 module optimized for M2M and IoT applications
- ✓ Worldwide LTE, UMTS/HSPA(+) and GSM/GPRS/EDGE coverage
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment
- ✓ Feature refinements: supports DFOTA and DTMF
- ✓ MIMO technology meets demands for data rate and link reliability in modem wireless communication systems



LTE Cat 4  
Max. 150 Mbps (DL)  
Max. 50 Mbps (UL)



Max. 42 Mbps (DL)  
Max. 5.76 Mbps (UL)



LCC Package



Wi-Fi



BT\*



Multi-constellation  
GNSS



Embedded Abundant  
Protocols



USB 2.0 High Speed  
Interface



Quectel Enhanced  
AT Commands



USB Drivers

# Quectel EC25 Series

LTE Cat 4	EC25-E	EC25-EU	EC25-EUX	EC25-J
<b>Region/Operator</b>	EMEA/South Korea/Thailand/India	EMEA/Thailand	EMEA/Thailand	Japan
<b>Dimensions (mm)</b>	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4
<b>Temperature Ranges</b>				
<b>Operating Temperature</b>	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C
<b>Extended Temperature</b>	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
<b>Frequency Bands</b>				
<b>LTE-FDD</b>	B1/B3/B5/B7/B8/B20	B1/B3/B7/B8/B20/B28A	B1/B3/B7/B8/B20/B28A	B1/B3/B8/B18/B19/B26
<b>LTE-TDD</b>	B38/B40/B41	B38/B40/B41	B38/B40/B41	B41
<b>WCDMA</b>	B1/B5/B8	B1/B8	B1/B8	B1/B6/B8/B19
<b>GSM/EDGE</b>	B3/B8	B3/B8	B3/B8	/
<b>GNSS</b>	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)
<b>Certifications</b>				
<b>Carrier</b>	<b>Global:</b> Vodafone <b>Europe:</b> Deutsche Telekom/Telefónica <b>South Korea:</b> SKT/KT*/LGU+*	<b>Europe:</b> Deutsche Telekom/ British Telecom	/	<b>Japan:</b> NTT DOCOMO/SoftBank/KDDI
<b>Regulatory</b>	<b>Global:</b> GCF <b>Europe:</b> CE <b>Taiwan (China):</b> NCC <b>Australia/New Zealand:</b> RCM <b>Thailand:</b> NBTC <b>Russia:</b> FAC <b>South Africa:</b> ICASA	<b>Global:</b> GCF <b>Europe:</b> CE <b>Taiwan (China):</b> NCC <b>Australia/New Zealand:</b> RCM	<b>Global:</b> GCF <b>Europe:</b> CE <b>Taiwan (China):</b> NCC <b>Australia/New Zealand:</b> RCM	<b>Japan:</b> JATE/TELEC
<b>Others</b>	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL
<b>Data Transmission</b>				
<b>LTE-FDD Data Rates (Mbps)</b>	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)
<b>LTE-TDD Data Rates (Mbps)</b>	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)
<b>DC-HSPA+ Data Rates (Mbps)</b>	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)
<b>WCDMA Data Rates (kbps)</b>	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
<b>EDGE Data Rates (kbps)</b>	296 (DL)/ 236.8 (UL)	296 (DL)/ 236.8 (UL)	296 (DL)/ 236.8 (UL)	/
<b>GPRS Data Rates (kbps)</b>	107 (DL)/ 85.6 (UL)	107 (DL)/ 85.6 (UL)	107 (DL)/ 85.6 (UL)	/
<b>Interfaces</b>				
<b>(U)SIM</b>	x 1	x 1	x 1	x 1
<b>UART</b>	x 2	x 2	x 2	x 2
<b>USB 2.0</b>	x 1	x 1	x 1	x 1
<b>Audio Digital (PCM)</b>	x 1	x 1	x 1	x 1
<b>I2C</b>	x 1	x 1	x 1	x 1
<b>SDIO</b>	x 2	x 2	x 1	x 2
<b>SGMII</b>	x 1	x 1	x 1	x 1
<b>Bluetooth*</b>	x 1	x 1	/	x 1
<b>ADC</b>	x 2	x 2	x 2	x 2
<b>Voice</b>				
<b>Speech Codec Modes</b>	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB
<b>Echo Arithmetic</b>	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression
<b>VoLTE</b>	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)
<b>Enhanced Features</b>				
<b>DTMF</b>	●	●	●	●
<b>DFOTA</b>	●	●	●	●
<b>QMI/RmNet</b>	●	●	●	●
<b>Audio Playback*/Audio Recording*</b>	Optional	Optional	Optional	Optional
<b>QuecLocator®</b>	●	●	●	●
<b>QuecFile®</b>	●	●	●	●
<b>(U)SIM Card Detection</b>	●	●	●	●
<b>Drivers</b>				
<b>USB Serial Driver</b>	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x
<b>GNSS Driver</b>	Android 4.x–9.x	Android 4.x–9.x	Android 4.x–9.x	Android 4.x–9.x
<b>RIL Driver</b>	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x
<b>NDIS</b>	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10
<b>MBIM</b>	Windows 8/8.1/10, Linux 3.18–5.4	Windows 8/8.1/10, Linux 3.18–5.4	/	Windows 8/8.1/10, Linux 3.18–5.4
<b>GobiNet Driver</b>	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4
<b>QMI_WWAN Driver</b>	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4
<b>Electrical Features</b>				
<b>Supply Voltage Range</b>	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.
<b>Power Consumption</b>	11 µA @ Power off 1.16 mA @ Sleep, Typ. 19.5 mA @ Idle	11 µA @ Power off 1.16 mA @ Sleep, Typ. 19.5 mA @ Idle	9.0 µA @ Power off 0.9 mA @ Sleep, Typ. 14.5 mA @ Idle	10 µA @ Power off 1.1 mA @ Sleep, Typ. 21 mA @ Idle

**Notes:**  
1. \* means under development.  
2. ● means supported.

# Quectel EC25 Series

LTE Cat 4	EC25-A	EC25-V	EC25-AF	EC25-AFX	EC25-AFXD (Data-only)
<b>Region/Operator</b>	North America	America Verizon	North America	North America	North America
<b>Dimensions (mm)</b>	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4
<b>Temperature Ranges</b>					
<b>Operating Temperature</b>	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C
<b>Extended Temperature</b>	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
<b>Frequency Bands</b>					
<b>LTE-FDD</b>	B2/B4/B12	B4/B13	B2/B4/B5/B12/B13/B14/B66/B71	B2/B4/B5/B12/B13/B14/B66/B71	B2/B4/B5/B12/B13/B14/B66/B71
<b>LTE-TDD</b>	/	/	/	/	/
<b>WCDMA</b>	B2/B4/B5	/	B2/B4/B5	B2/B4/B5	B2/B4/B5
<b>GSM/EDGE</b>	/	/	/	/	/
<b>GNSS</b>	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)
<b>Certifications</b>					
<b>Carrier</b>	America: AT&T/T-Mobile Canada: Rogers/Telus	America: Verizon	America: Verizon/ AT&T (FirstNet) / T-Mobile/U.S. Cellular Canada: Rogers/Telus	America: Verizon/ AT&T (FirstNet)	America: Verizon* / AT&T (FirstNet)* / T-Mobile*
<b>Regulatory</b>	America: FCC North America: PTCRB Canada: IC	Global: GCF America: FCC	Global: GCF America: FCC North America: PTCRB Canada: IC	Global: GCF America: FCC North America: PTCRB Canada: IC	Global: GCF America: FCC North America: PTCRB
<b>Others</b>	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL
<b>Data Transmission</b>					
<b>LTE-FDD Data Rates (Mbps)</b>	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)
<b>LTE-TDD Data Rates (Mbps)</b>	/	/	/	/	/
<b>DC-HSPA+ Data Rates (Mbps)</b>	42 (DL)/ 5.76 (UL)	/	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)
<b>WCDMA Data Rates (kbps)</b>	384 (DL)/ 384 (UL)	/	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
<b>EDGE Data Rates (kbps)</b>	/	/	/	/	/
<b>GPRS Data Rates (kbps)</b>	/	/	/	/	/
<b>Interfaces</b>					
<b>(U)SIM</b>	x 1	x 1	x 1	x 1	x 1
<b>UART</b>	x 2	x 2	x 2	x 2	x 2
<b>USB 2.0</b>	x 1	x 1	x 1	x 1	x 1
<b>Audio Digital (PCM)</b>	x 1	x 1	x 1	x 1	x 1
<b>I2C</b>	x 1	x 1	x 1	x 1	x 1
<b>SDIO</b>	x 2	x 2	x 2	x 1	x 1
<b>SGMII</b>	x 1	x 1	x 1	x 1	x 1
<b>Bluetooth*</b>	x 1	x 1	x 1	/	/
<b>ADC</b>	x 2	x 2	x 2	x 2	x 2
<b>Voice</b>					
<b>Speech Codec Modes</b>	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	/
<b>Echo Arithmetic</b>	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	Echo Cancellation/ Noise Suppression	/
<b>VoLTE</b>	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	/
<b>Enhanced Features</b>					
<b>DTMF</b>	●	●	●	●	/
<b>DFOTA</b>	●	●	●	●	●
<b>QMI/ RmNet</b>	●	●	●	●	●
<b>Audio Playback*/ Audio Recording*</b>	Optional	Optional	Optional	Optional	Optional
<b>QuecLocator®</b>	*	●	●	●	●
<b>QuecFile®</b>	●	●	●	●	●
<b>(U)SIM Card Detection</b>	●	●	●	●	●
<b>Drivers</b>					
<b>USB Serial Driver</b>	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x
<b>GNSS Driver</b>	Android 4.x–9.x	Android 4.x–9.x	Android 4.x–9.x	Android 4.x–9.x	Android 4.x–9.x
<b>RIL Driver</b>	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x
<b>NDIS</b>	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10
<b>MBIM</b>	Windows 8/8.1/10, Linux 3.18–5.4	Windows 8/8.1/10, Linux 3.18–5.4	Windows 8/8.1/10, Linux 3.18–5.4	/	/
<b>GobiNet Driver</b>	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4
<b>QMI_WWAN Driver</b>	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4
<b>Electrical Features</b>					
<b>Supply Voltage Range</b>	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.
<b>Power Consumption</b>	10 µA @ Power off 1.1 mA @ Sleep, Typ. 21 mA @ Idle	10 µA @ Power off 0.85 mA @ Sleep, Typ. 20 mA @ Idle	10 µA @ Power off 1.0 mA @ Sleep, Typ. 23.3 mA @ Idle	8.0 µA @ Power off 0.83 mA @ Sleep, Typ. 14.9 mA @ Idle	8.0 µA @ Power off 0.83 mA @ Sleep, Typ. 14.9 mA @ Idle

**Notes:**  
1. \* means under development.  
2. ● means supported.

# Quectel EC25 Series

LTE Cat 4	EC25-MX	EC25-AU	EC25-AUX
<b>Region/Operator</b>	Mexico	Latin America/Australia/New Zealand	Latin America/ Australia/New Zealand
<b>Dimensions (mm)</b>	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4	32.0 × 29.0 × 2.4
<b>Temperature Ranges</b>			
<b>Operating Temperature</b>	-35°C to +75°C	-35°C to +75°C	-35°C to +75°C
<b>Extended Temperature</b>	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
<b>Frequency Bands</b>			
<b>LTE-FDD</b>	B2/B4/B5/B7/B28/B66	B1/B2 <sup>①</sup> /B3/B4/B5/B7/B8/B28	B1/B2 <sup>①</sup> /B3/B4/B5/B7/B8/B28
<b>LTE-TDD</b>	/	B40	B40
<b>WCDMA</b>	B2/B4/B5	B1/B2/B5/B8	B1/B2/B4/B5/B8
<b>GSM/EDGE</b>	/	B2/B3/B5/B8	B2/B3/B5/B8
<b>GNSS</b>	/	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)	GPS/GLONASS/BeiDou (Compass)/Galileo/QZSS (Optional)
<b>Certifications</b>			
<b>Carrier</b>	/	<b>Australia:</b> Telstra	
<b>Regulatory</b>	<b>America:</b> FCC <b>North America:</b> PTCRB <b>Mexico:</b> IFETEL	<b>Global:</b> GCF <b>America:</b> FCC <b>Taiwan (China):</b> NCC <b>Brazil:</b> Anatel <b>Australia/New Zealand:</b> RCM	<b>Europe:</b> CE <b>America:</b> FCC <b>Taiwan (China):</b> NCC <b>Brazil:</b> Anatel <b>Australia/New Zealand:</b> RCM <b>South Africa:</b> ICASA*
<b>Others</b>	RoHS/WHQL	RoHS/WHQL	RoHS/WHQL
<b>Data Transmission</b>			
<b>LTE-FDD Data Rates (Mbps)</b>	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)	150 (DL)/ 50 (UL)
<b>LTE-TDD Data Rates (Mbps)</b>	/	130 (DL)/ 30 (UL)	130 (DL)/ 30 (UL)
<b>DC-HSPA+ Data Rates (Mbps)</b>	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)	42 (DL)/ 5.76 (UL)
<b>WCDMA Data Rates (kbps)</b>	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)	384 (DL)/ 384 (UL)
<b>EDGE Data Rates (kbps)</b>	/	296 (DL)/ 236.8 (UL)	296 (DL)/ 236.8 (UL)
<b>GPRS Data Rates (kbps)</b>	/	107(DL)/ 85.6 (UL)	107 (DL)/ 85.6 (UL)
<b>Interfaces</b>			
<b>(U)SIM</b>	x 1	x 1	x 1
<b>UART</b>	x 2	x 2	x 2
<b>USB 2.0</b>	x 1	x 1	x 1
<b>Audio Digital (PCM)</b>	x 1	x 1	x 1
<b>I2C</b>	x 1	x 1	x 1
<b>SDIO</b>	x 1	x 2	x 1
<b>SGMII</b>	x 1	x 1	x 1
<b>Bluetooth*</b>	/	x 1	/
<b>ADC</b>	x 2	x 2	x 2
<b>Voice</b>			
<b>Speech Codec Modes</b>	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB	HR/FR/EFR/AMR/AMR-WB
<b>Echo Arithmetic</b>	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression	Echo Cancellation/Noise Suppression
<b>VoLTE</b>	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)	Digital Audio and VoLTE (Voice over LTE) (Optional)
<b>Enhanced Features</b>			
<b>DTMF</b>	●	●	●
<b>DFOTA</b>	●	●	●
<b>QMI/ RmNet</b>	●	●	●
<b>Audio Playback*/ Audio Recording*</b>	Optional	Optional	Optional
<b>QuecLocator®</b>	●	●	●
<b>QuecFile®</b>	●	●	●
<b>(U)SIM Card Detection</b>	●	●	●
<b>Drivers</b>			
<b>USB Serial Driver</b>	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x	Windows 7/8/8.1/10, Linux 2.6–5.4, Android 4.x–9.x
<b>GNSS Driver</b>	/	Android 4.x–9.x	Android 4.x–9.x
<b>RIL Driver</b>	Android 4.x–10.x	Android 4.x–10.x	Android 4.x–10.x
<b>NDIS</b>	Windows 7/8/8.1/10	Windows 7/8/8.1/10	Windows 7/8/8.1/10
<b>MBIM</b>	/	Windows 8/8.1/10, Linux 3.18–5.4	/
<b>GobiNet Driver</b>	Linux 2.6–5.4	Linux 2.6–5.4	Linux 2.6–5.4
<b>QMI_WWAN Driver</b>	Linux 3.4–5.4	Linux 3.4–5.4	Linux 3.4–5.4
<b>Electrical Features</b>			
<b>Supply Voltage Range</b>	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.	3.3–4.3V, 3.8 V Typ.
<b>Power Consumption</b>	19 µA @ Power off 1.0 mA @ Sleep, Typ. 12.9 mA @ Idle	11 µA @ Power off 1.3 mA @ Sleep, Typ. 22 mA @ Idle	9.0 µA @ Power off 0.9 mA @ Sleep, Typ. 16.9 mA @ Idle

#### Notes:

- ① LTE-FDD B2 of EC25-AU and EC25-AUX does not support Rx-diversity.
- \* means under development.
- means supported.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Development Tools](#) category:*

*Click to view products by [Qeuctel Wireless](#) manufacturer:*

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)