

Antenna

YC0017BA Datasheet

Antenna Services

Version: 1.6

OC (Antenna Only): **YC0017BA**

OC (Antenna + EVB): **YC0017BAEVB**

Date: 2021-12-06

Status: Released



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel’s or third-party’s servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2021. All rights reserved.

About the Document

Revision History

Version	Date	Author	Note
-	2021-06-04	Kenny YIN/ Aria CHU	Creation of the document
1.0	2021-06-04	Kenny YIN/ Aria CHU	First official release
1.1	2021-07-05	Aria CHU	Added the test condition in Chapter 4.5 and EVB size in Chapter 7.
1.2	2021-08-04	Aria CHU	Updated the first picture (Chapter 4.5).
1.3	2021-09-16	Winfred WU	1. Added Chapters 8, 9, and 10. 2. Updated the drawing (Chapter 7).
1.4	2021-09-27	Aria CHU	1. Updated the antenna drawing (Chapter 6). 2. Added Chapter 7.
1.5	2021-09-28	Aria CHU	Added the new OC YC0017BAEVB on the cover.
1.6	2021-12-06	Aria CHU	Updated the product description in Chapter 1.

Contents


About the Document	3
Contents.....	4
1 Product Description	5
2 Product Features.....	5
3 Product Specifications	6
4 Overall Performance	7
4.1. Test Environment.....	7
4.2. VSWR.....	8
4.3. Efficiency	9
4.4. Gain.....	11
4.5. Radiation Pattern.....	13
5 Matching Circuit	17
6 Product Size	18
7 Schematic Symbol and Pin Definition	19
8 EVB Size.....	20
9 Soldering Temperature	21
10 Reflow Profile	21
11 Package.....	22

1 Product Description

This Quectel embedded 4G FPC antenna covers main 4G LTE bands and is compatible with 3G/2G/LPWA bands. Featuring high efficiency and gain, it is an ideal antenna for a smooth and stable connection with high-efficiency data transmission even under the influence of the device's internal structure. Ground plane independent, it's designed to be mounted directly to the underside of either a plastic or non-metallic enclosure. Ease of integration with a cable and connector which can be customized to meet your product design and RF module.

2 Product Features

- LTE
- High efficiency
- Excellent performance

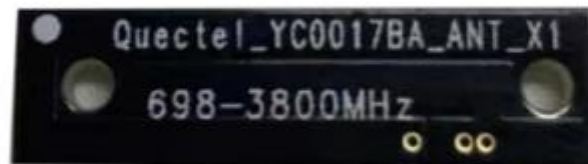

3 Product Specifications

Passive Electrical Specifications

Frequency Range	700–960 MHz, 1710–2700 MHz, 3400–3800 MHz
Input Impedence	50 Ω
VSWR	≤ 4.0
Gain	≤ 4.0 dBi
Polarization Type	Linear

Mechanical Specifications

Antenna Size	25 mm x 7 mm x 3 mm
Casing	FR4
Connector Type	SMD
Working Temperature	-40 °C to +85 °C
Radome Color	Black
IP Rating	-
Mounting Type	-


4 Overall Performance

4.1. Test Environment

- KEYSIGHT VNA Network Analyzer E5063A 100 kHz – 8.5 GHz
- RayZone® 2800 Chamber 5G (FR1) SISO/MIMO, 400 MHz – 8.0 GHz







4.2. VSWR

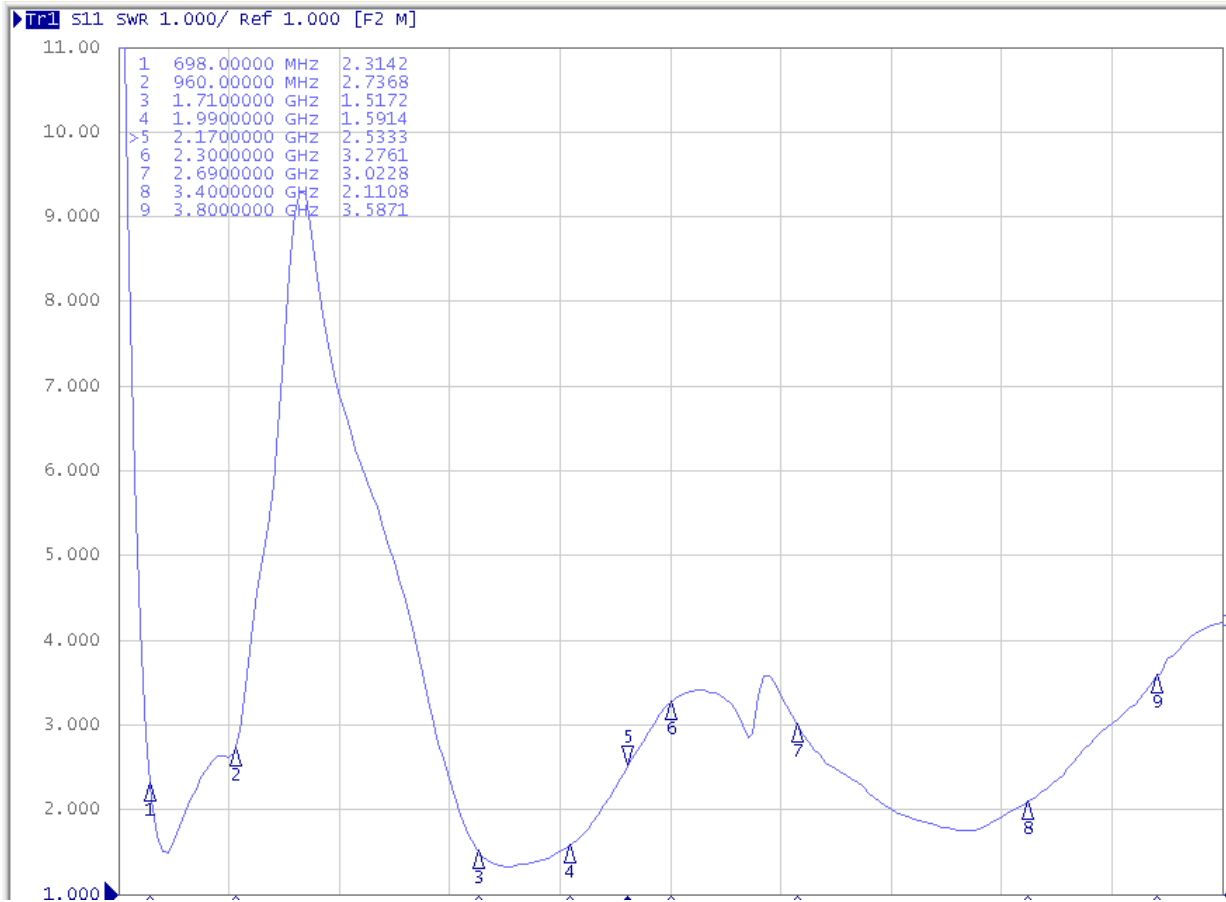

Frequency (MHz)	698	960	1710	1990	2170	2300	2690	3400	3800
VSWR	2.31	2.73	1.51	1.59	2.53	3.27	3.02	2.11	3.58



4.3. Efficiency

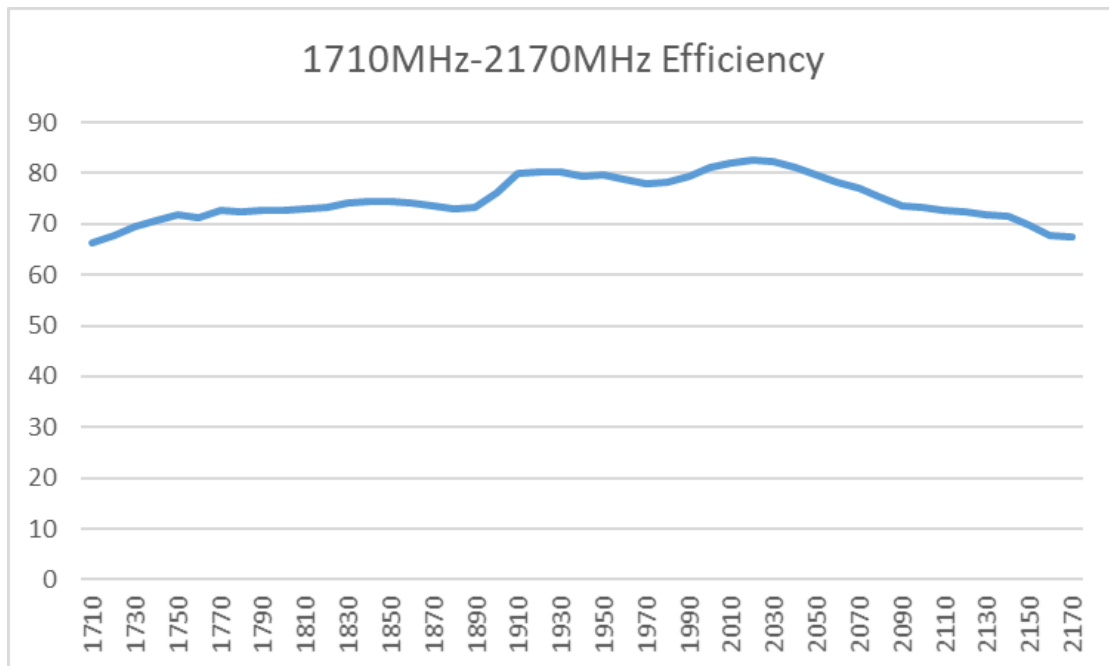
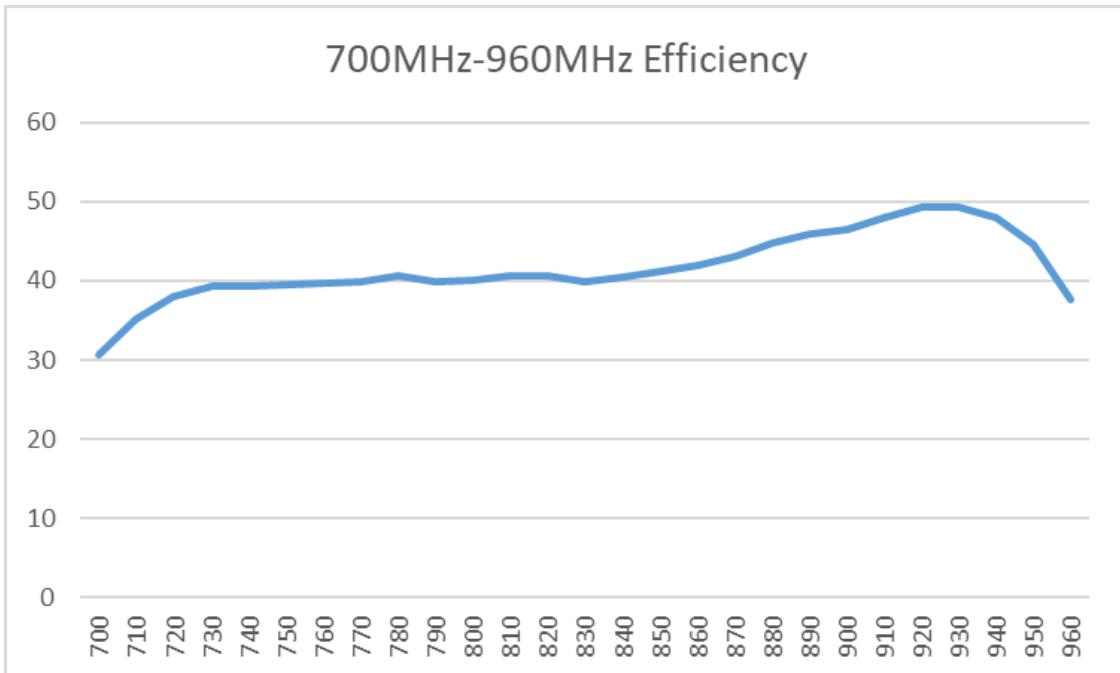


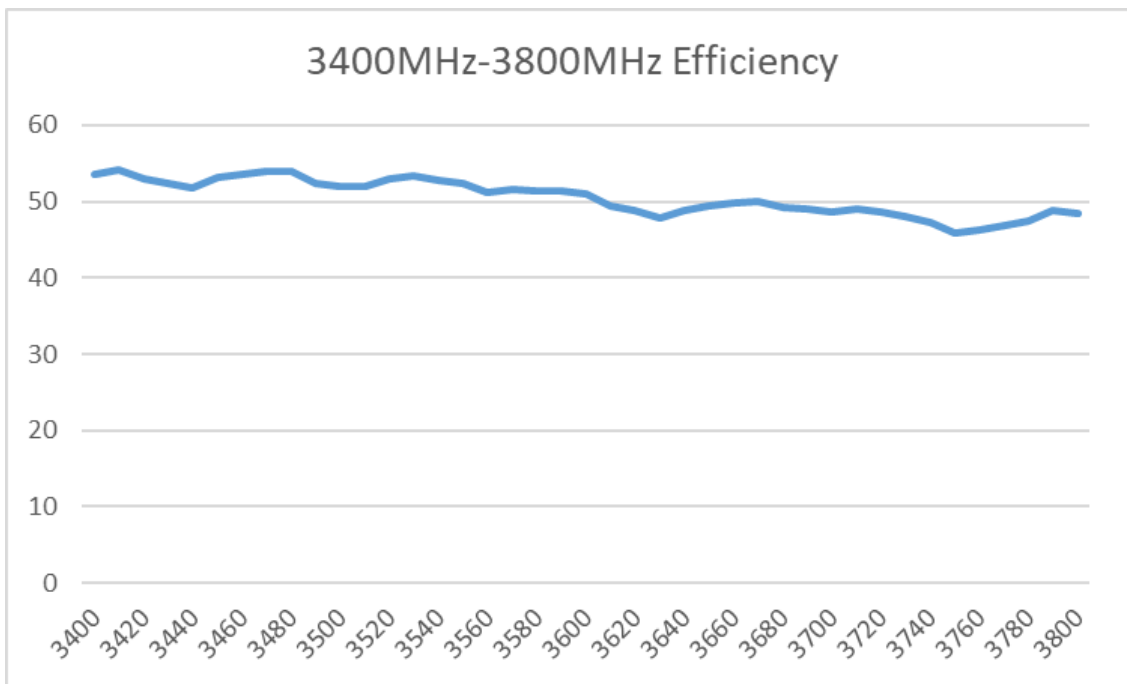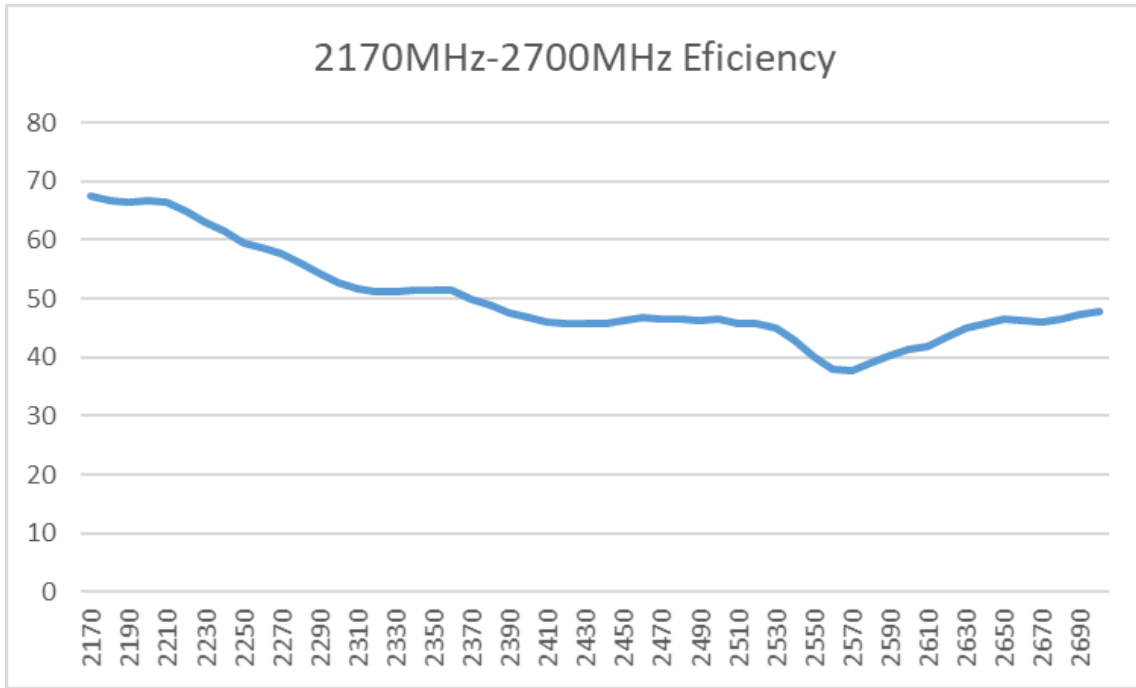

Frequency (MHz)	700	960	1710	1990	2170	2300	2700	3400	3800
Efficiency (%)	30.65	37.62	66.25	79.47	67.46	52.63	47.82	53.58	48.43

4.4. Gain

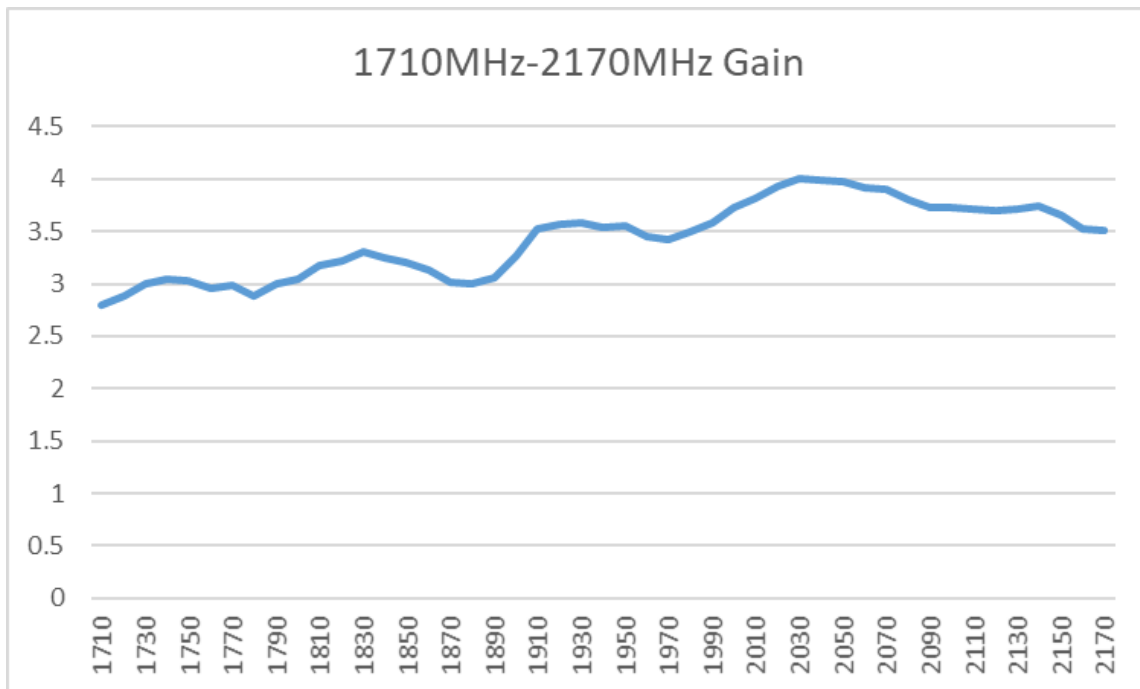
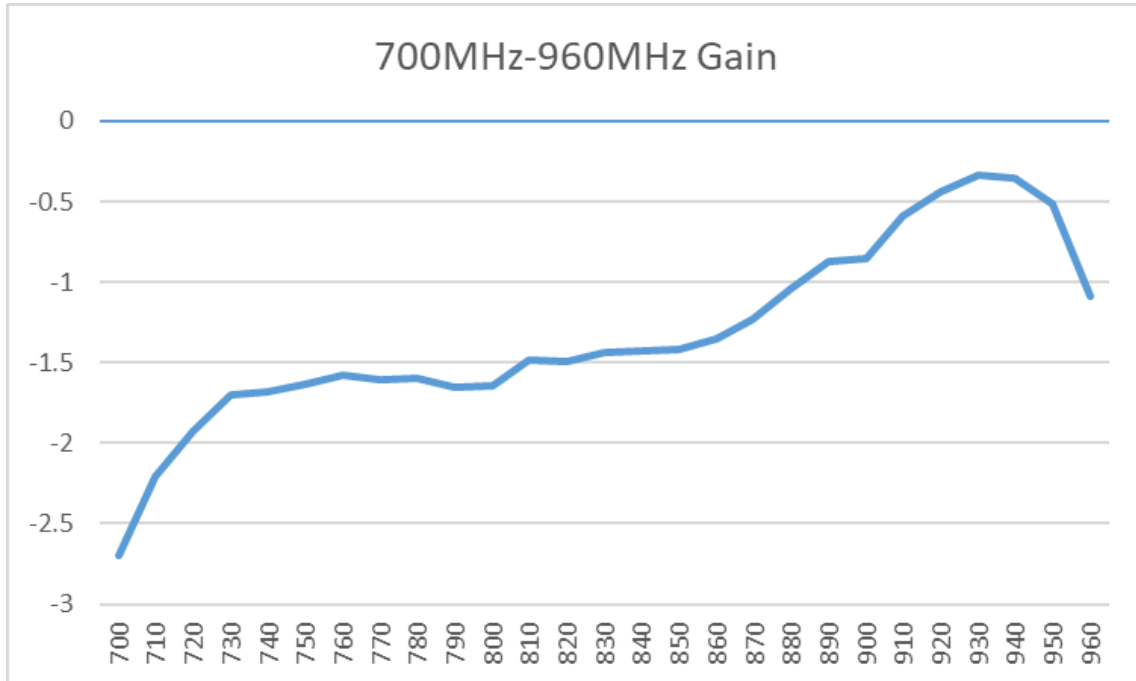


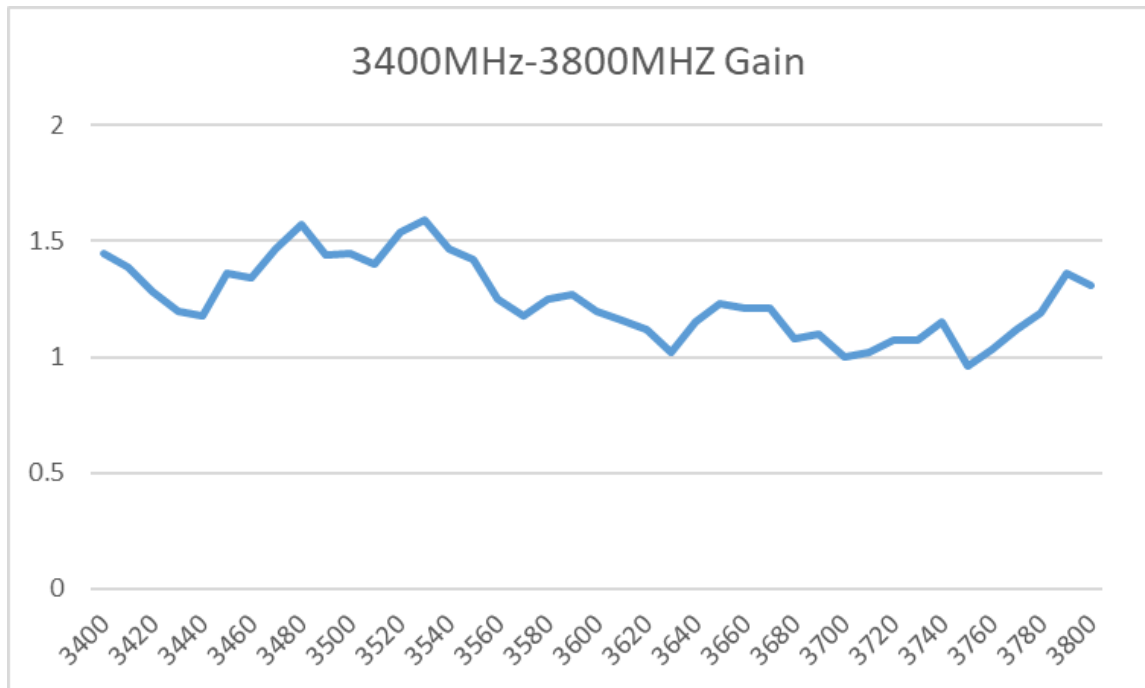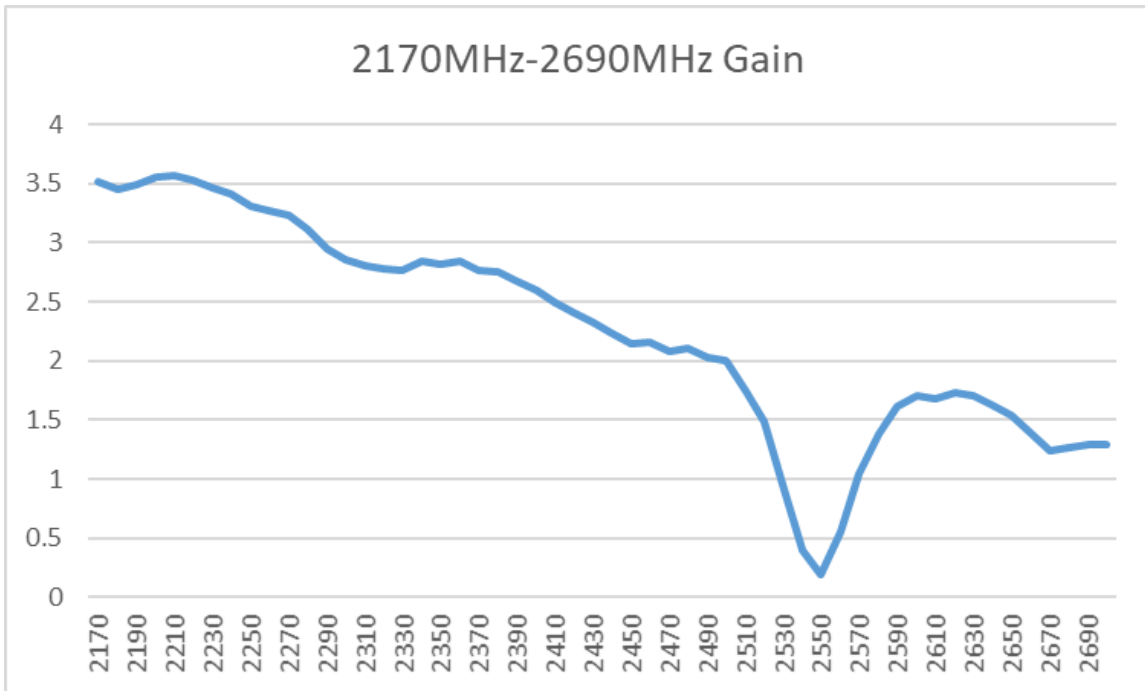



Frequency (MHz)	700	960	1710	1990	2170	2300	2700	3400	3800
Gain (dBi)	-2.70	-1.09	2.79	3.59	3.51	2.86	1.29	1.45	1.31


4.5. Radiation Pattern

- Test Condition: with ground plane (EVB size: 36 mm × 140 mm).

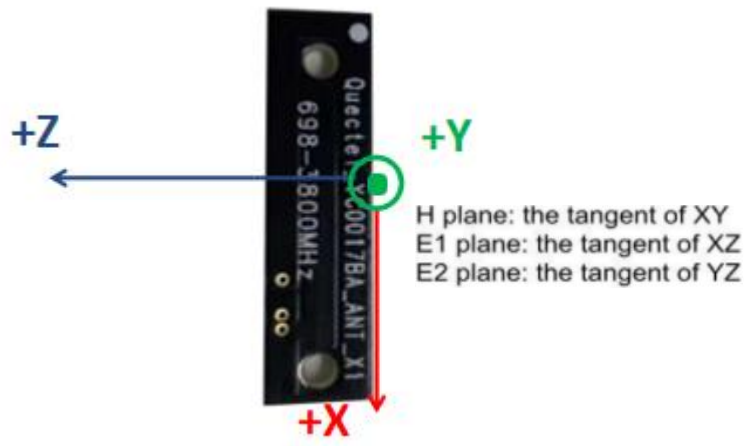
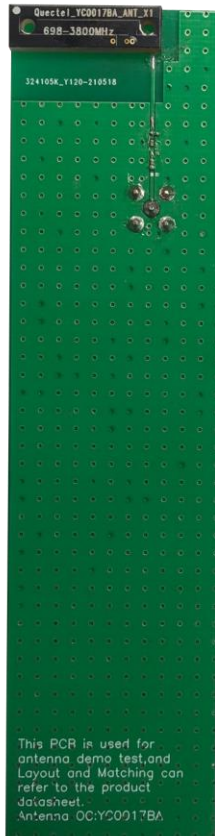


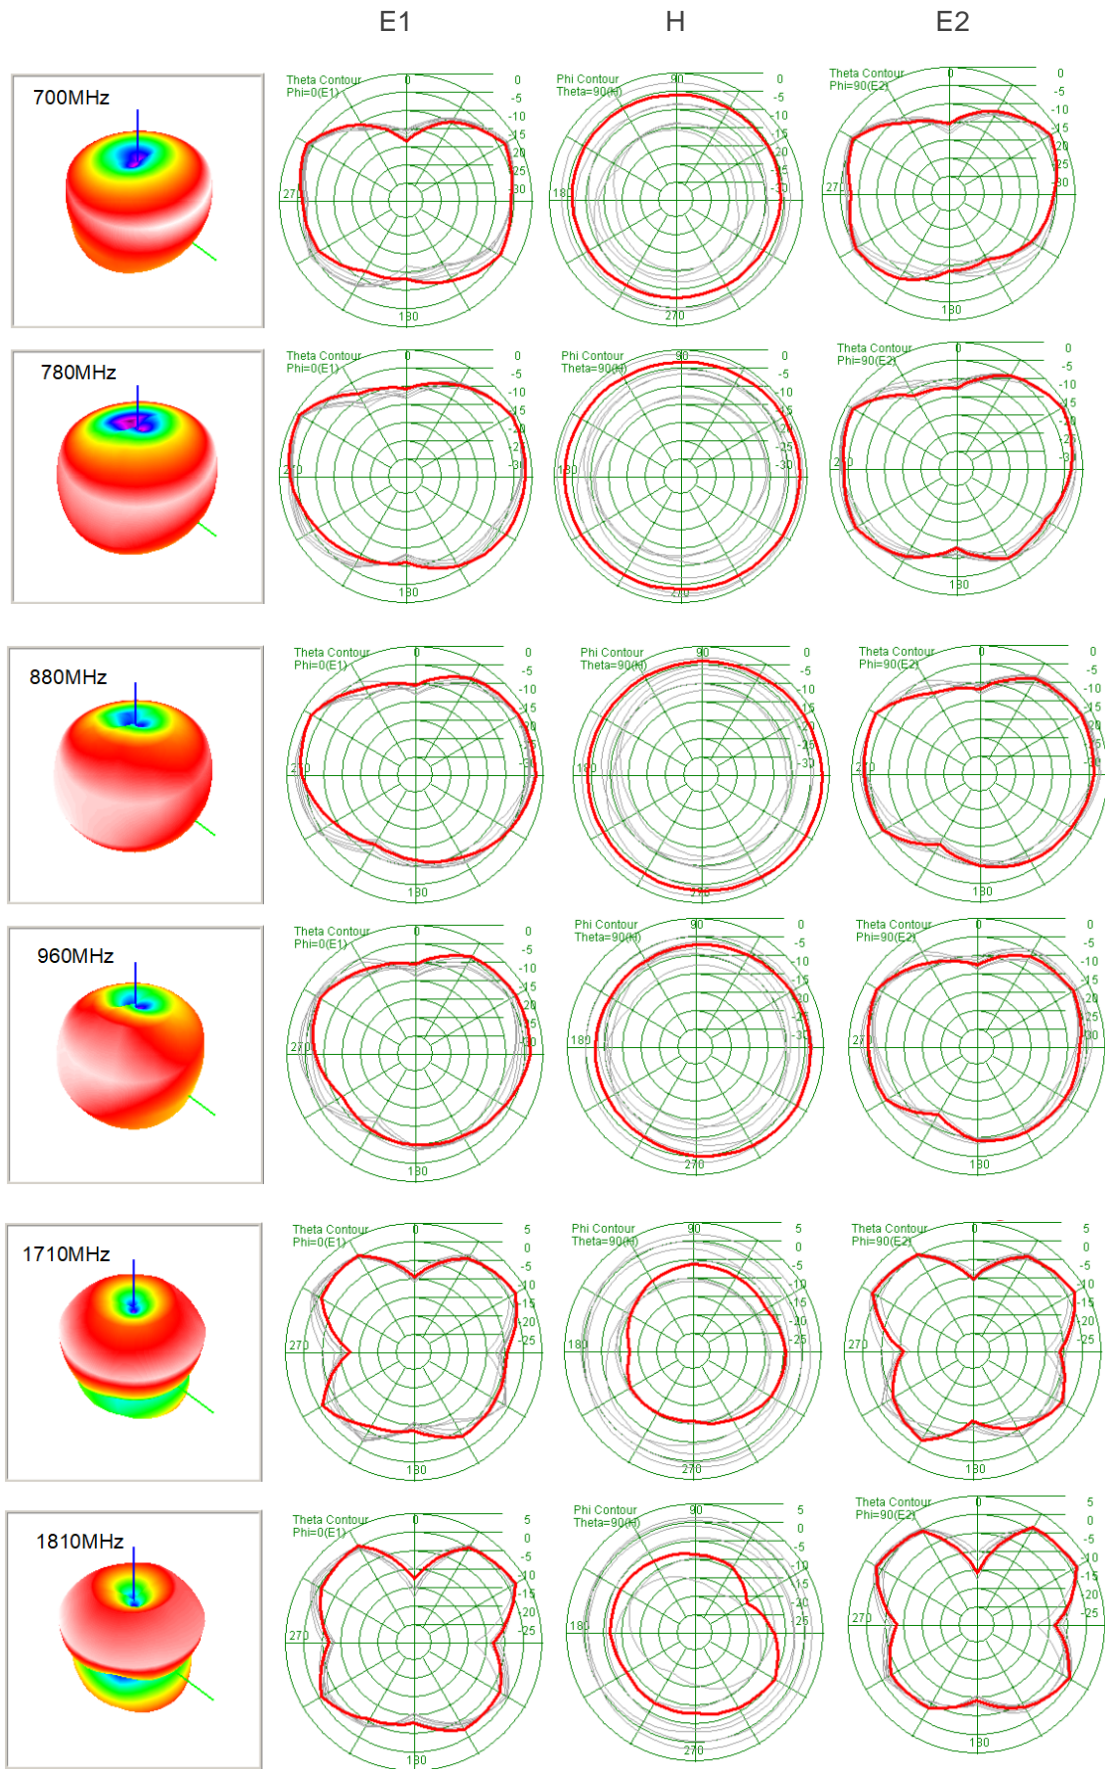

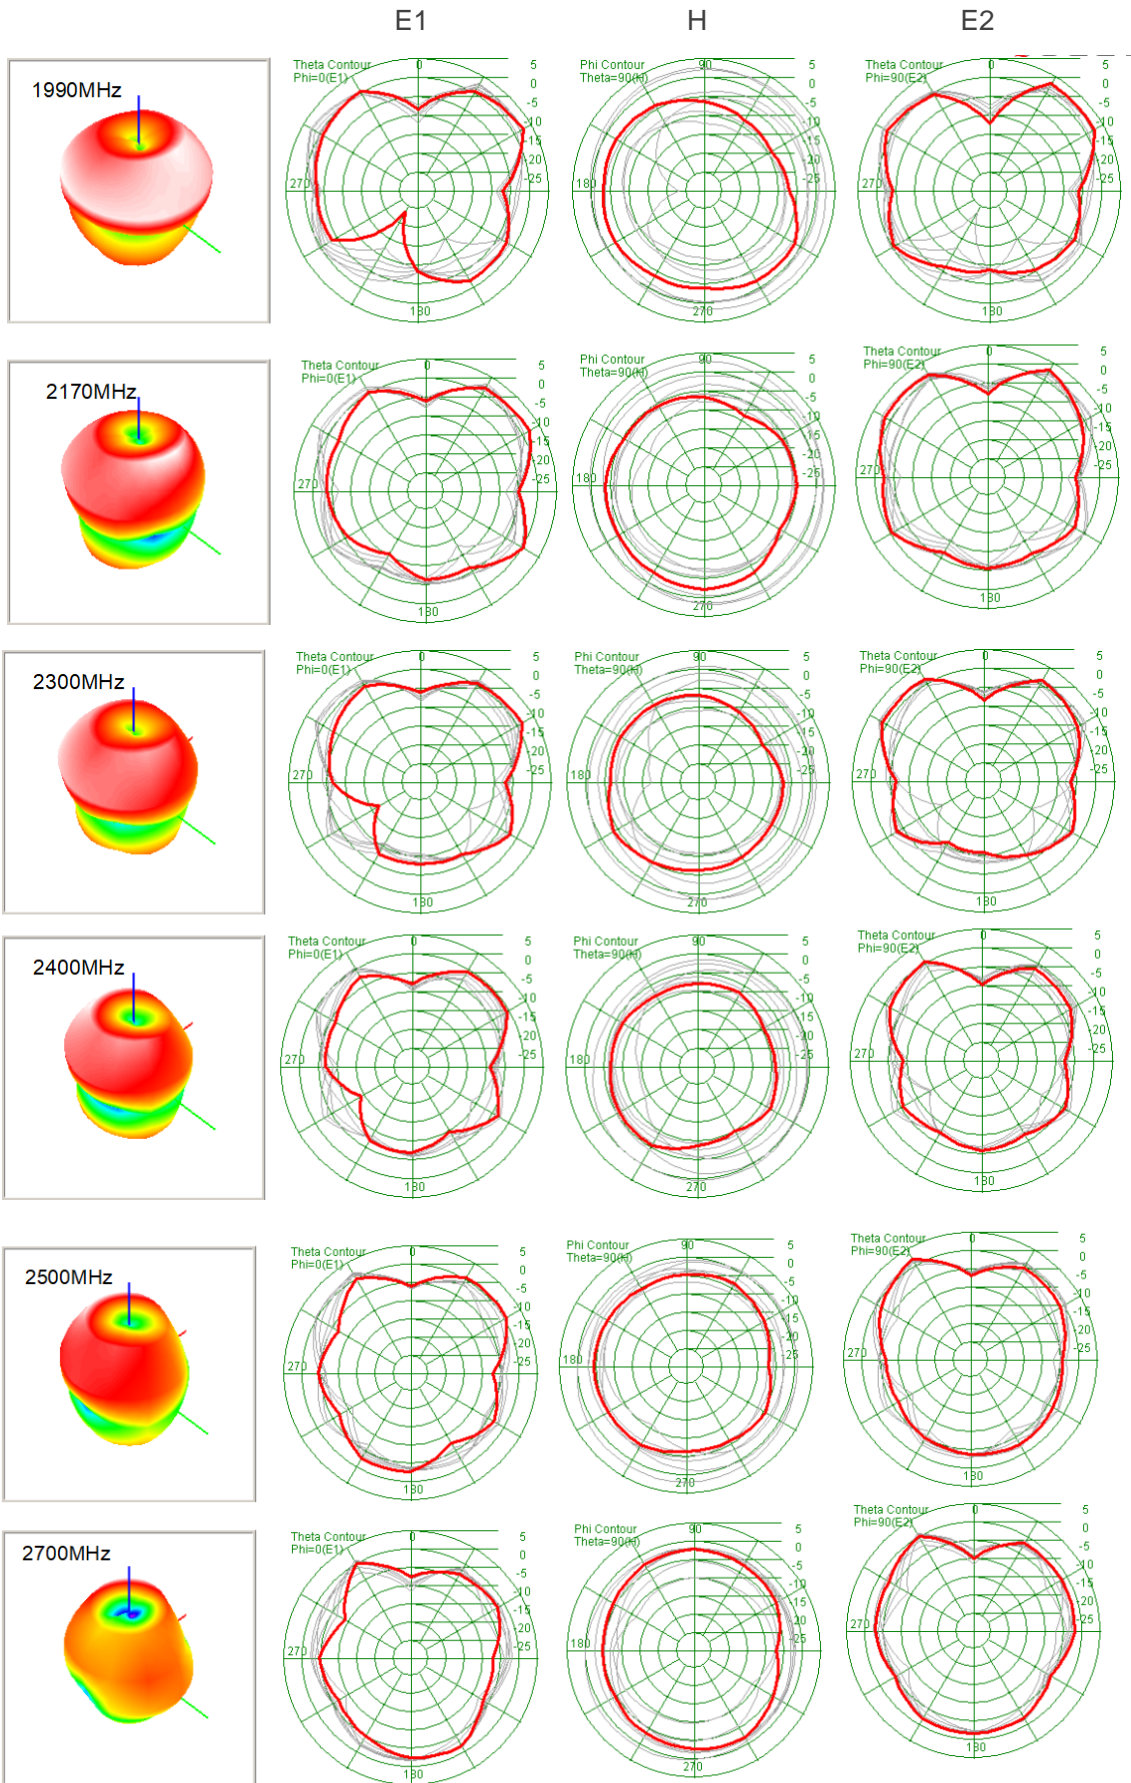


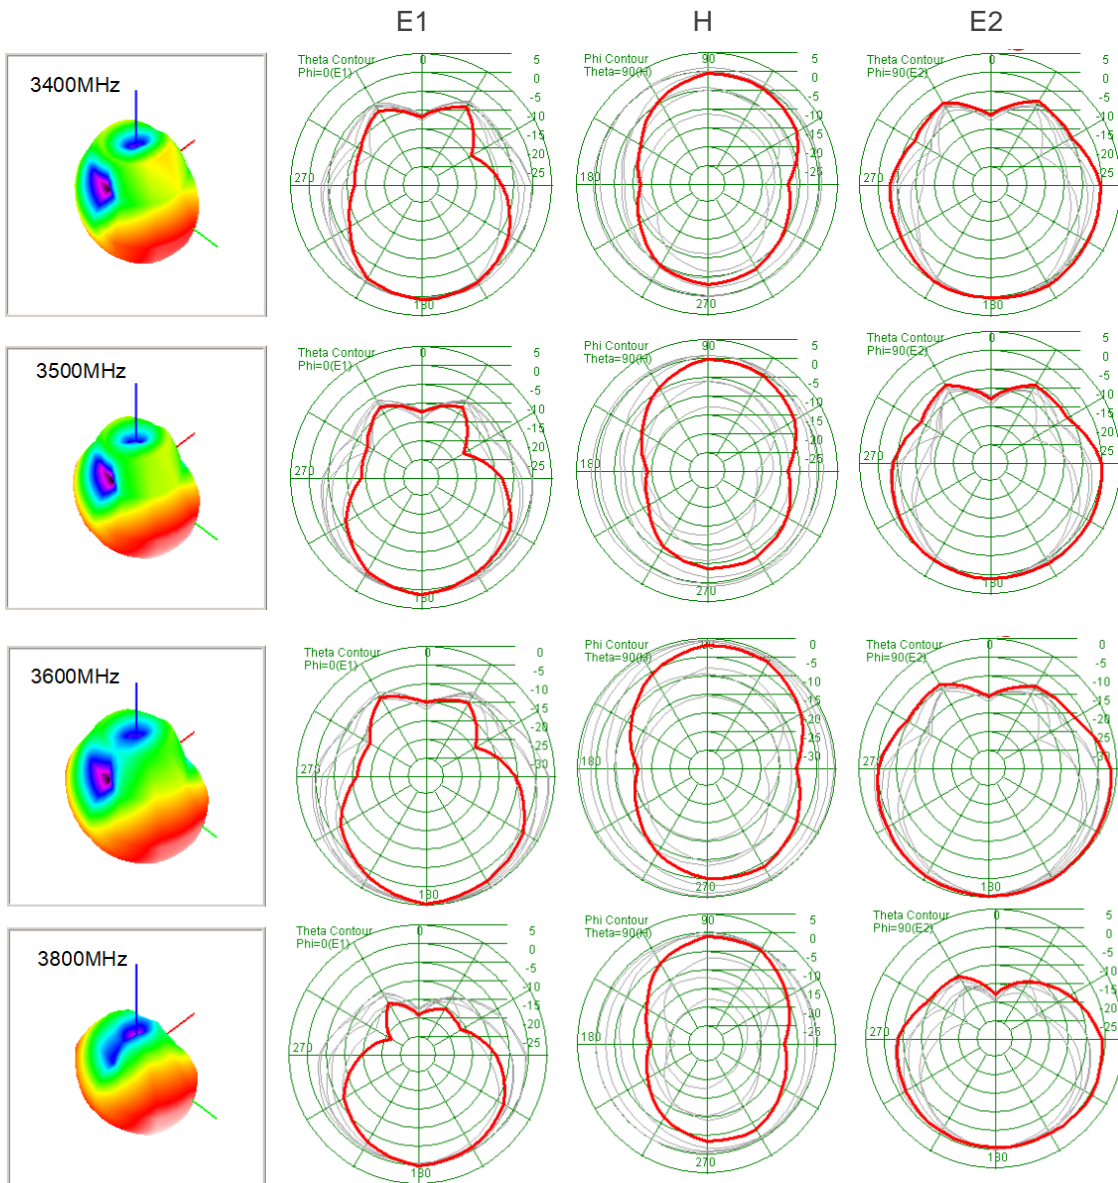

5 Matching Circuit

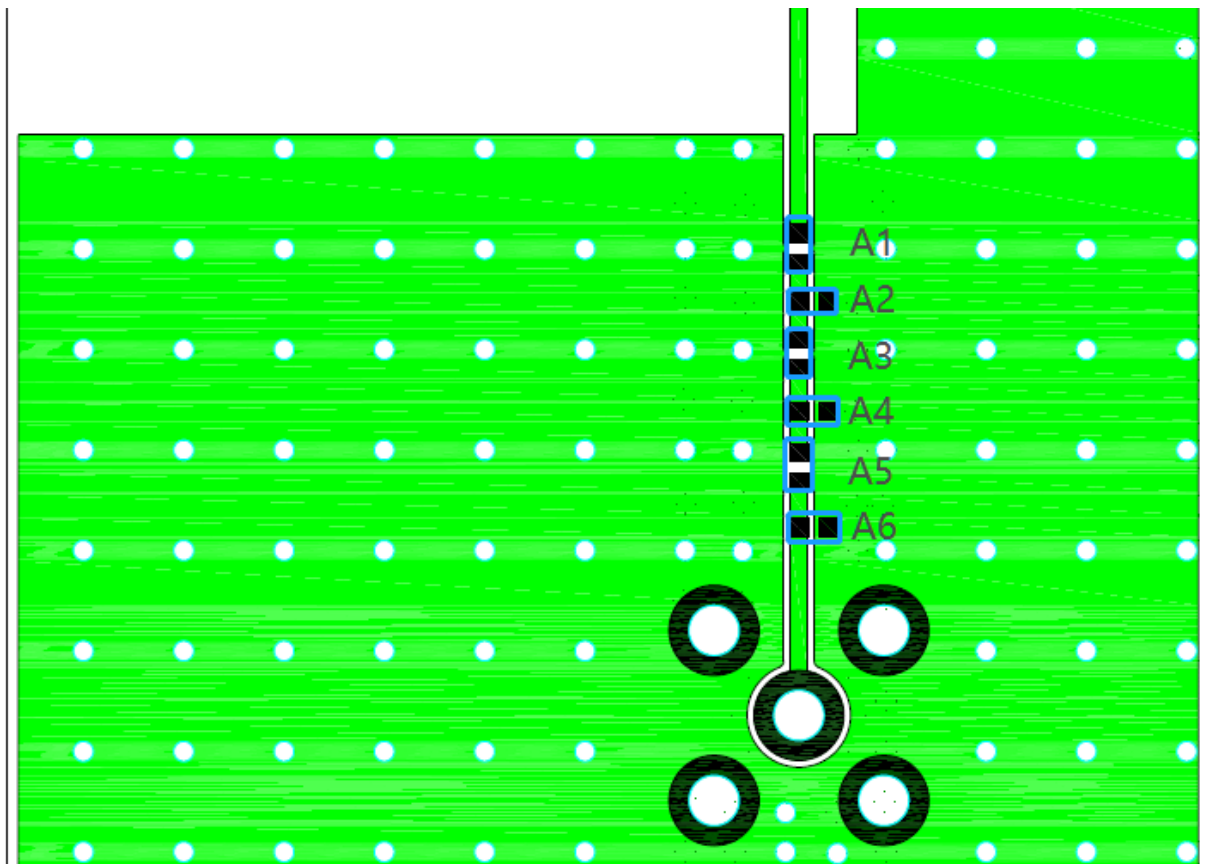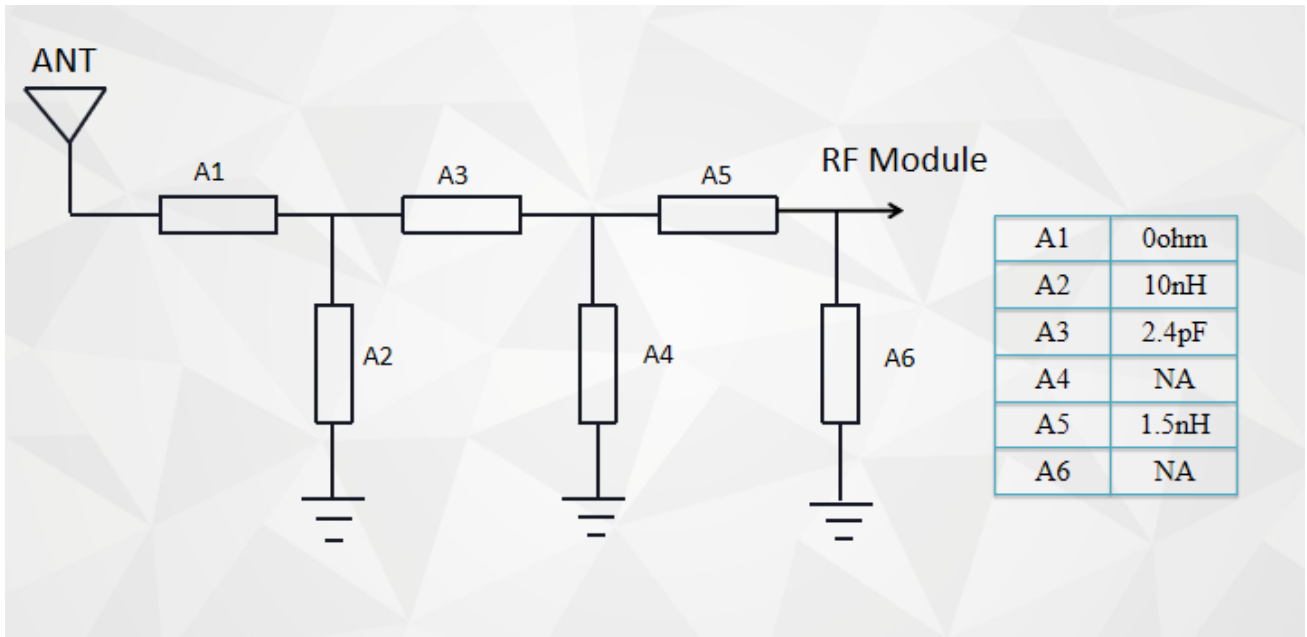


6 Product Size

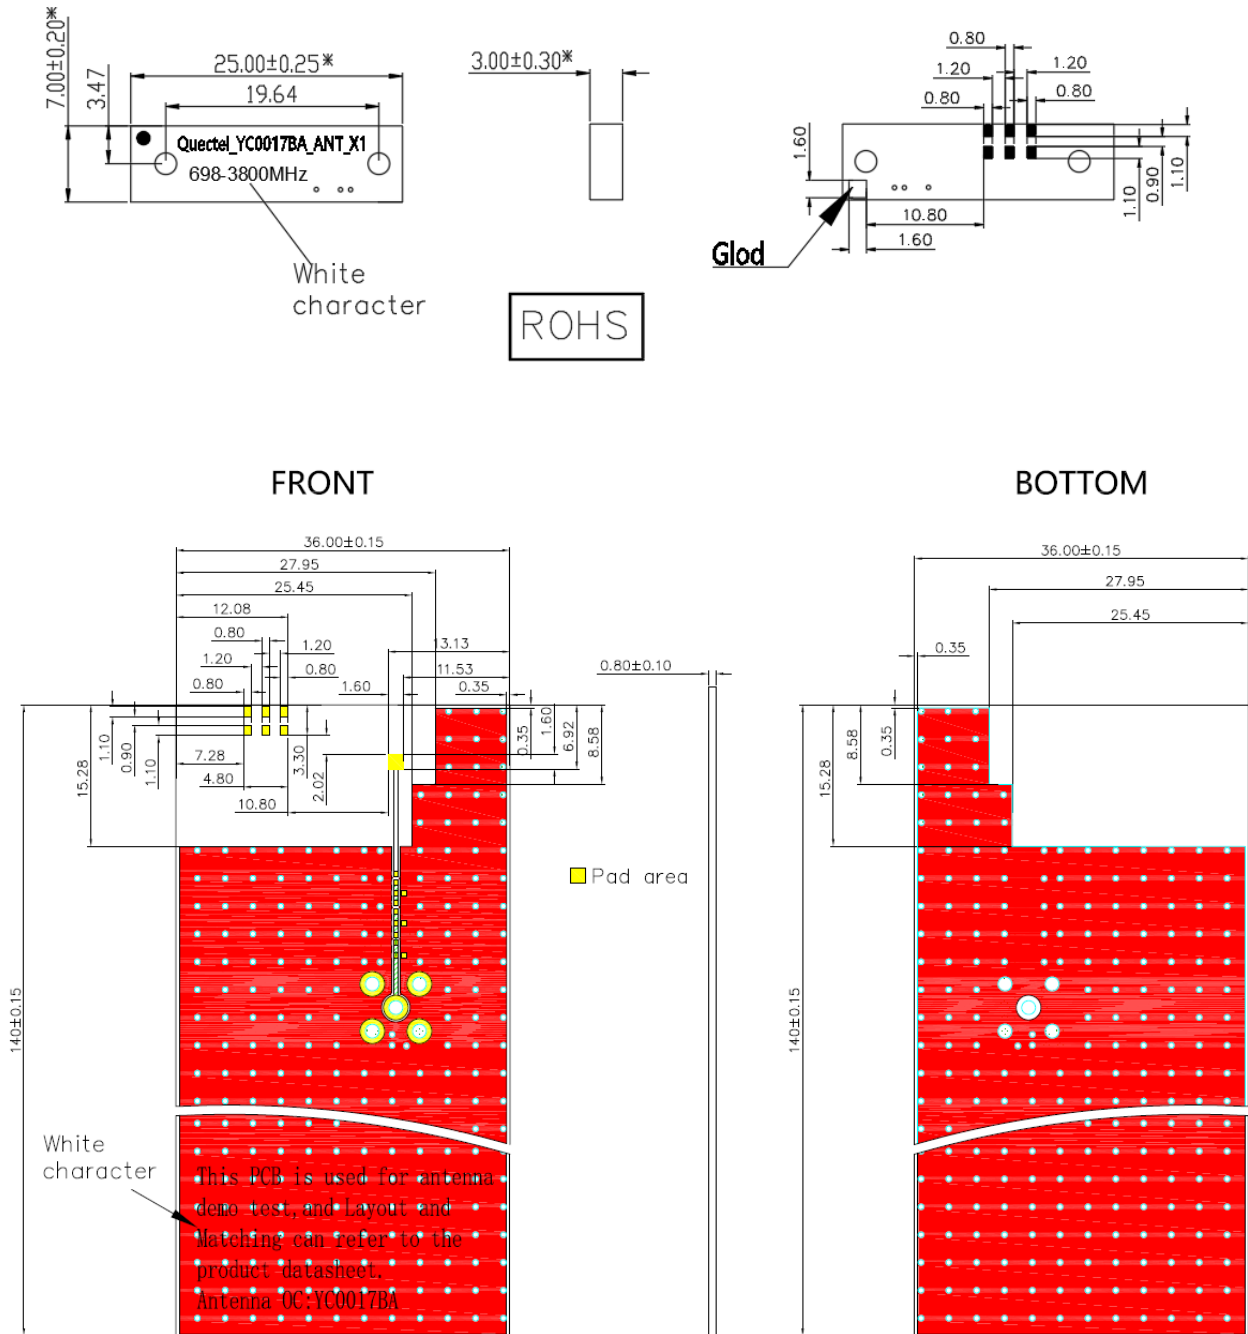

7 Schematic Symbol and Pin Definition


The pin assignment for the antenna is as follows. The antenna has 7 pins and only one works. All other pins are designed for mechanical strength.




Front:Perspective View

PAD NO.	Description
1	Not used (mechanical only)
2	Not used (mechanical only)
3	Not used (mechanical only)
4	Not used (mechanical only)
5	Not used (mechanical only)
6	Not used (mechanical only)
7	Feed


8 EVB Size

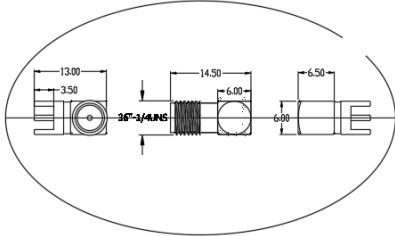


	Name	Material	Brand	QTY	NO
1	Antenna	FR4 3.0t	BLACK	1	
2	PCBA	FR4 0.8t	Green	1	
3	SMA-K	Brass	Gold Plated	1	
4	0 ohm inductor(0402)	Ceramics	N/A	1	
5	10 nH inductor(0402)	Ceramics	MURATA	1	LQG15HS10N02
6	2.4 pF inductor(0402)	Ceramics	MURATA	1	GCM1555C1H2R4BA16
7	1.5 nH inductor(0402)	Ceramics	MURATA	1	LQG15HS1N5S02

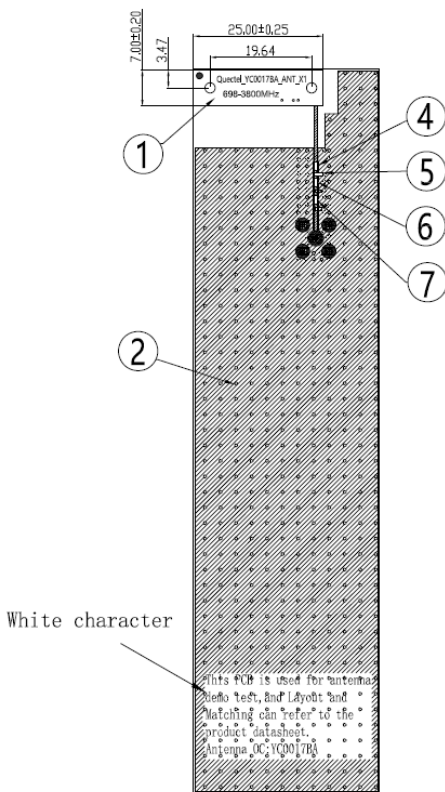

Front

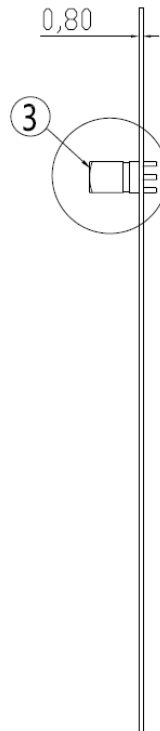

ROHS

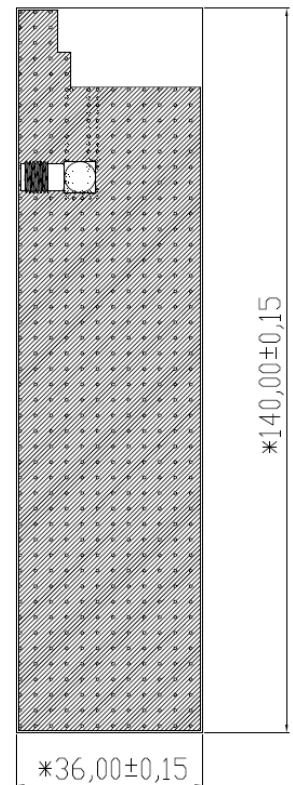


Back


9 Soldering Temperature

Phase	Profile Features	PB-Free Assembly (Max.)
RAMP-UP	Avg. Ramp-up Rate (T _{max} to T _p)	3 °C/second (Max.)
PREHEAT	Temperature Min. (T _{min})	150 °C
	Temperature Max. (T _{max})	180 °C
	Time (T _{min} to T _{max})	120 seconds (Max.)
REFLOW	Temperature (TL)	210 °C
	Total Time above TL (tl)	50 seconds (Max.)
PEAK	Temperature (T _p)	260 °C
	Time (t _p)	10 seconds (Max.)
RAMP-DOWN	Rate	5 °C/second (Max.)

10 Reflow Profile

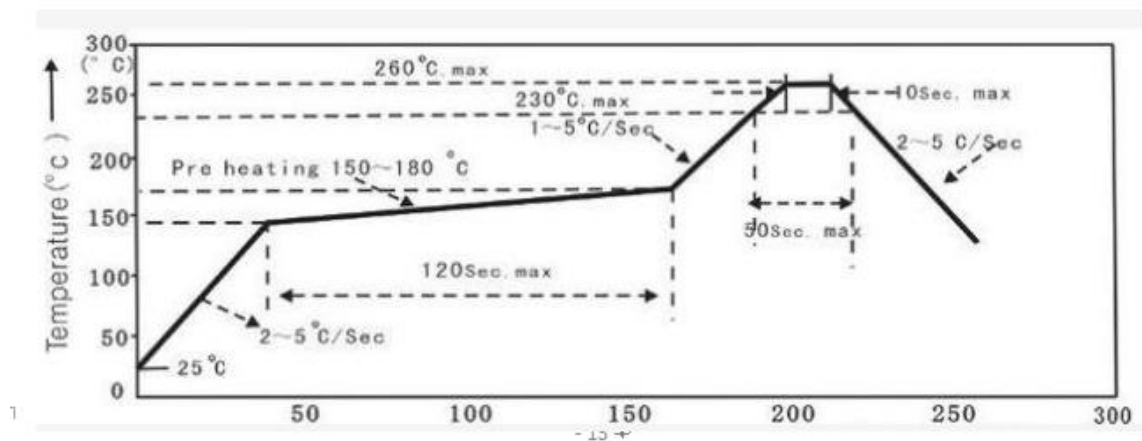

11 Package

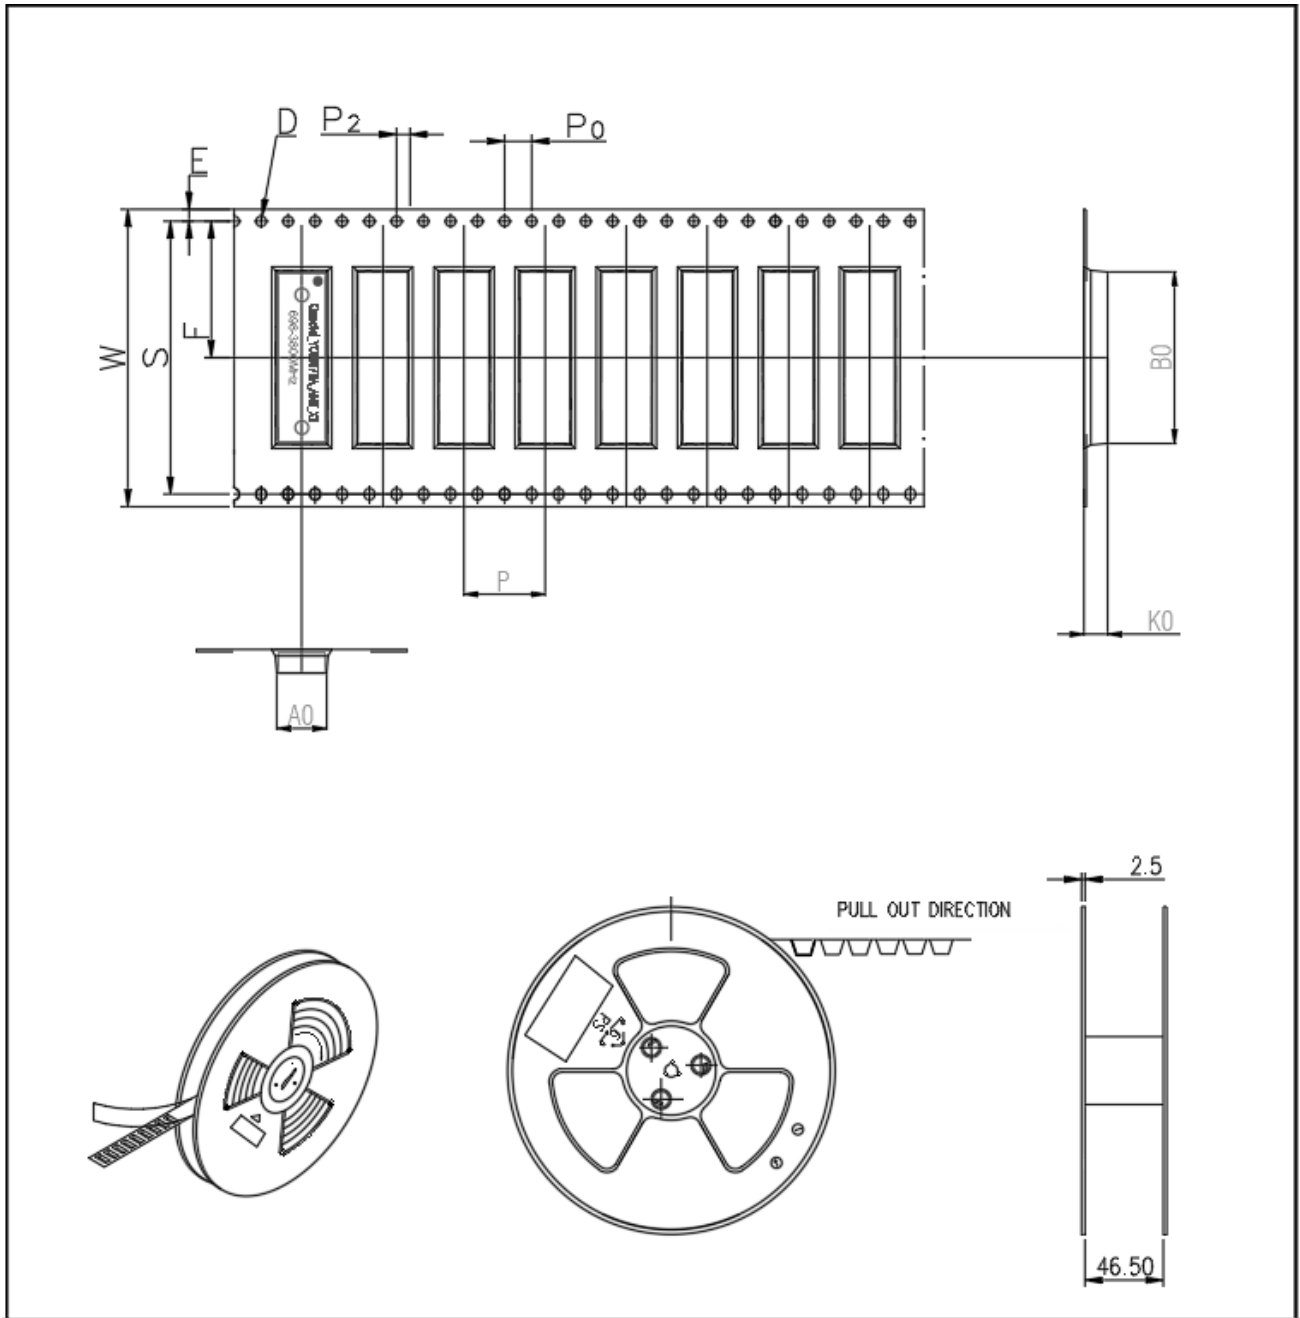

ITEM	W	A ₀	A ₁	B ₀	B ₁	K ₀	P	F	E ₀	D	P ₀	P ₂	T
DIM	44.00 ^{+0.30} _{-0.30}	7.40 ^{+0.10} _{-0.10}	-- ^{+0.10} _{-0.10}	25.40 ^{+0.10} _{-0.10}	-- ^{+0.10} _{-0.10}	3.50 ^{+0.10} _{-0.10}	12.0 ^{+0.10} _{-0.10}	20.20 ^{+0.15} _{-0.15}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.10} _{-0.10}	0.35 ^{+0.05} _{-0.05}
ALTERNATE													
Custom Confirm: _____ Date: _____ <input type="checkbox"/> Accept <input type="checkbox"/> Rejection Reason: _____													
1. 10 sprocket hole pitch cumulative tolerance 2. Carrier camber not to exceed 1mm in 250mm. 3. A ₀ and B ₀ measured on a plane 0.3mm above the bottom of the pocket. 4. K ₀ measured from a plane on the inside bottom of the pocket to the top surface of the carrier. 5. All dimensions meet EIA-481-2A requirements. 6. Material: black Conductive Polystyrene. 7. Thickness: 0.35±0.05 mm. 8. Packing length per 13" reel : 18.60Meters. 9. Component loader per 13" reel :1500PCS 18.60M 10. Vacuum packaging, desiccant in each package, pizza box packaging										FY			
										Customer P/N: SAF41282A			
Mold No. :										Date: 2021-09-01		Approved by: CHENGTAO	
Unit: mm										Ratio: 1:1		Reviewed by: CHENGTAO	
												Designed by: HUWENMING	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antenna Development Tools](#) category:

Click to view products by [Quectel Wireless](#) manufacturer:

Other Similar products are found below :

[PCSD.06.A](#) [1002427-02](#) [1004796-01](#) [YC0010AAEVB](#) [1001013-02](#) [1005454-01](#) [1004795-01](#) [1002436-01](#) [ACR1004A-EVB](#) [RAC00024-EVB](#) [RAC00245-EVB](#) [ACR1004GC-EVB](#) [W3012-K](#) [W3006-K](#) [SPD.25A](#) [74889100TB](#) [A10192-U1](#) [DTAD.01.A.50](#) [SR4C033-EVB-1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#) [W3010-K](#) [LORA-K](#) [ISM-K](#) [REFLECTOR-EVB-1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [ACR0301U-EVB](#) [ACR1504I3-EVB-A](#) [ACR1504I3-EVB-S](#) [ACR2005I4-EVB](#) [ACR4006X-EVB](#) [PRO-EB-450](#) [PRO-EB-453](#) [PRO-EB-472](#) [PRO-EB-476](#) [PRO-EB-550](#)