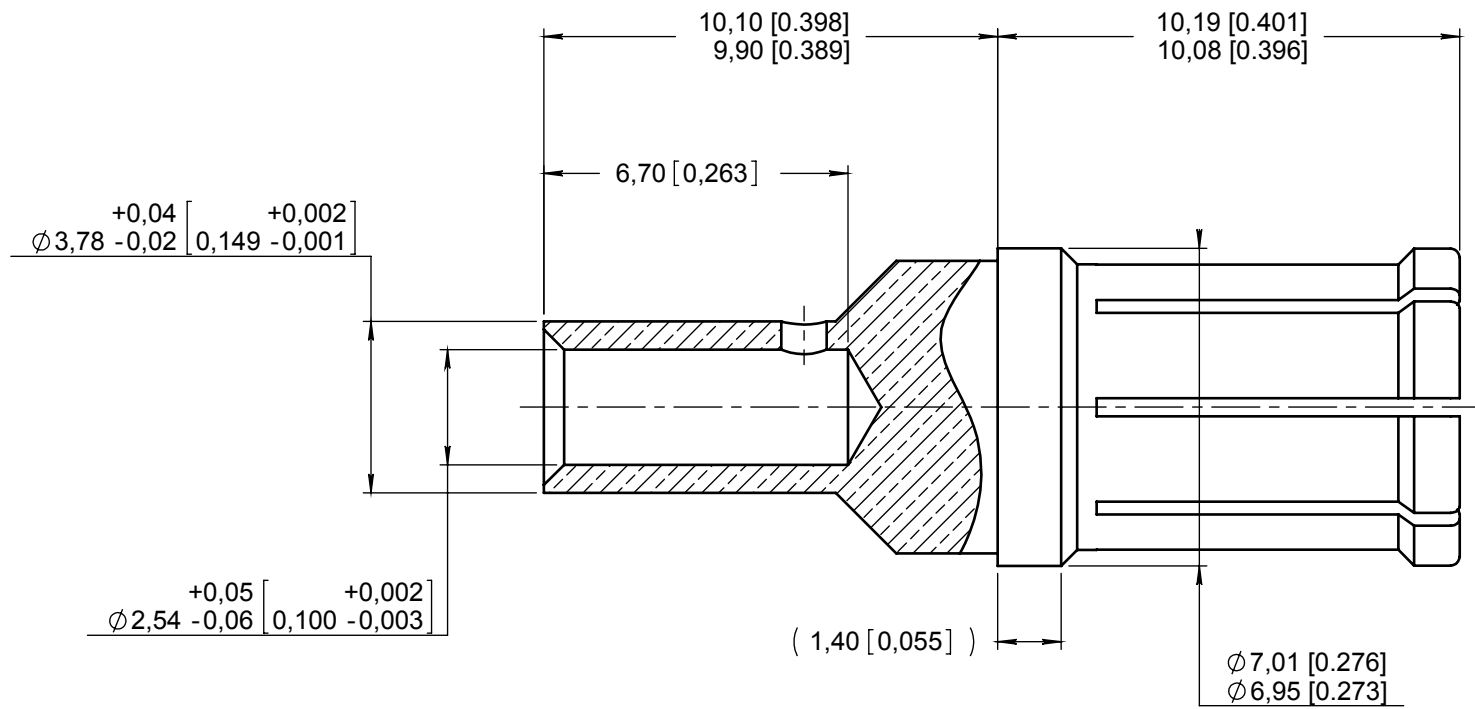
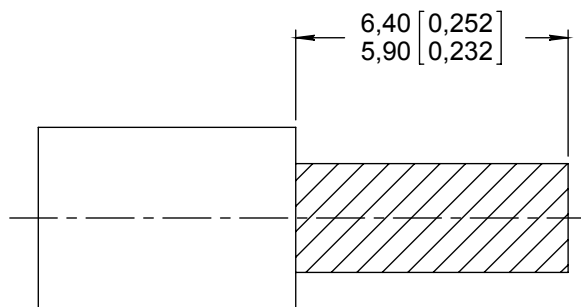


**Series
EPX**
Size 5 power socket contact
 For AWG 12, AWG 14 and AWG 16 cables.

Issue:
 Jul. 13, 2018

Page
1/1

WIRING INSTRUCTIONS :

- Cable stripped length


MATERIAL AND FINISH :

- Copper alloy, gold over nickel

EXTRACTION TOOL :

 - FOR AWG 16, AWG 14 & AWG 12 : M81969/28-01
 Radiall P/N 282946

CRIMPING TOOL :


- FOR AWG 16; AWG 14 & AWG 12 : Radiall P/N 282 613

POSITIONER :

- FOR AWG 16; AWG 14 & AWG 12 : Radiall P/N 282 586 005

SELECTOR SETTING :

- FOR AWG 16 : 4
- FOR AWG 14 : 5
- FOR AWG 12 : 6

DIMENSIONS : mm (inch are given for information only)


Estimated weight : 2.5 g

CREATION PEN: NOM: L.Garcia DATE: Jan. 22, 07 APPR.: M.Pessard				
	Jul. 13, 18	Correction in dimension 6,7 [0,263] Added parentheses to dimension 1,4 [0,055]	Lopez C.	Weihls H.
	Sept 08, 14	Added AWG 14 wires and weight updated	SURAUULT	Vieira
	April 24, 13	Added AWG 16 wires	Vieira	Legloahec
	Issue	Revisions	Name	Approved

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIAL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)
[765-18-0080D](#) [829992-1](#) [902-77-02113](#) [PS00/A0620/6300](#) [PS25/A0420/63](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#)
[MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-](#)
[W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#)