

Amphenol Corporation

Amphenol Industrial Operations

40-60 Delaware Avenue
Sidney, NY 13838-1395
Phone: 607-563-5011
1-800-678-0141
Fax: 607-563-5157
Web: www.amphenol-industrial.com

Amphenol Canada

20 Mellford Drive
Scarborough, ON M1B 2X6 Canada
Phone: 416-291-4401
Telex: 065 25210
Fax: 416-292-0647

SALES OFFICES

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

23276 South Pointe Drive, Suite 113
Laguna Hills, CA 92653
Phone: 949-855-4454
1-800-678-0141
Fax: 949-855-9115

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

7506 East Independence Blvd.
Charlotte, NC 28227
Phone: 704-531-9053
1-800-678-0141
Fax: 704-531-9054

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

2010 Corporate Ridge
McLean, VA 22101
Phone: 1-800-678-0141

AUTHORIZED INDUSTRIAL

DISTRIBUTORS

Corporate Headquarters

ALPHABETICAL LISTING

APD (All Product Distributors):

Arrow Electronics Englewood, CO
800-388-2277

Avnet EMG Dallas, TX
800-332-8638

PEI Genesis Philadelphia, PA
888-254-5920

Powell Electronics Philadelphia, PA
800-235-7880

TTI Inc. Fort Worth, TX
800-225-5884

Commercial/Industrial Distributors

Astrex Plainview, NY
800-633-6360

Electro Sonic Inc. Ontario, Canada
800-56-SONIC/416-494-1555

J&K Connectors Seattle, WA
206-674-3300

Nies Electronic Frankfurt, Germany
(06109)7364-0

Schuster Elect. Cincinnati, OH
800-877-6875

INTERNATIONAL (Industrial Operations Offices)

Latin America

ARGENTINA

Amphenol Argentina

Avenida Callao 930
2nd floor Office B Plaza
C1023AAP Buenos Aires, Argentina
Phone: (54 11) 48 15 68 86
Fax: (54 11) 48 14 57 79
E-mail: vendas@amphenol.com.ar

BRAZIL

Amphenol do Brasil Ltda.

Rua Diogo Moreira 132
CEP 05423-010
Sao Paulo - SP, Brazil
Phone: (55-11) 3815.1003
Fax: (55-11) 3815.1629
E-mail: vendas@amphenol.com.br

MEXICO

Amphenol Mexico

Prolongacion Reforma 61-6 B2
Col. Paseo de las Lomas
C.P. 01330 Mexico D.F., Mexico
Phone: (52-55) 5258.9984
Fax: (52-55) 5081.6890
E-mail: info@amphenolmexico.com

Europe

AUSTRIA & EASTERN EUROPE

Amphenol Gesellschaft mbH

P.O. Box 63, 3990 DB Houton
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

ENGLAND

Amphenol Limited

Thanet Way, Whitstable
Kent CT5 3JF, Great Britain
Phone: (44-1-227) 773200
Fax: (44-1-227) 276571
Telex: (851) 96157 AMPHNL G

FRANCE

Amphenol Socapex

948 Promenade de l'Arve, BP29
Thyez 74301 Cedex, France
Phone: (33-4) 50892800
Fax: (33-4) 50961941
Telex: MSTH 215709F
ASF CBV TX

GERMANY

Amphenol-Tuchel Elect. GmbH

August-Haesser Strasse 10
Postfach 1110
74001 Heilbronn, Germany
Phone: (49-7131) 929 0
Fax: (49-7131) 929 414
Telex: (841) 728 816 ATEHN D

Amphenol Infocom for UK, Ireland, Germany and France

P.O. Box 63, 3990 DB Houton
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

ITALY

Amphenol Italia S.p.A.

Via Barbaiana 5
20020 Lainate (Milano), Italy
Phone: 39-02-932541
Fax: 39-02-93254444
E-mail: info@amphenol-it.com

BENELUX

Amphenol European Sales Operations

Amphenol Benelux BV
P. O. Box 63, 3990 DB Houten
The Netherlands
Phone: 31-30-6358000
Fax: 31-30-6377034
E-mail: info@amphenol-nl.com

NORDIC AREA

Amphenol Scandinavia

P.O. Box 2047
Johanneslundsvagen 2
19402 Upplands Vasby, Sweden
Phone: 46-8-59410440
Fax: 46-8-59033800
E-mail: info@amphenol-se.com

SPAIN & PORTUGAL

Amphenol Iberica

Edificio "Burgosol" - Oficina No. 55
c/Comunidad de Madrid, 35-bis,
28230 Las Rozas,
Madrid, Spain
Phone: 34-91-6407303
Fax: 34-91-6407307
E-mail: info@amphenol-it.com

SWITZERLAND

Amphenol Switzerland

P.O. Box 63, 3990 DB Houton,
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

Middle East / Africa

ISRAEL

Bar-Tec Ltd.

3 Hagavish St., P.O.B. 279
Kfir-Barkan Bldg., East Industrial Zone
Kfar Sava 44102, Israel
Phone: (972-9) 764.4100
Fax: (972-9) 7674324
E-mail: www.bar-tec.com

SOUTH AFRICA

Amphenol South Africa

30 Impala Road
2196 Sandton - Chislehurst
South Africa
Tel: (27-11) 783-9517
Fax: (27-11) 783-9519
E-mail: amphenol_africa@csi.com

TURKEY

GESTAS

34630, Besyol - Londra Asfalti
Florya Is Merkezi - Kat. 2
Sefakoy / Istanbul, Turkey
Phone: (90-212) 624.52.29
Fax: (90-212) 599.30.68

Asia / Pacific

AUSTRALIA

Amphenol Australia LTD

2 Fineways Blvd.
Keysborough Melbourne, Victoria
3173 Australia
Phone: 613 8796 8888
Fax: 613 8796 8801
E-mail: info@amphenolaust.com.au

CHINA

Amphenol China, Shanghai Liaison Office

ShanghaiMart, Room 11A61
2299 Yanan Road West, Shanghai
200336 PR China
Phone: 86-21-5763-0656
Fax: 86-21-5763-3575
E-mail: achn@amphenol.com.cn

HONG KONG

Amphenol East Asia Ltd.

2201 Railway Plaza
39 Chatham Road South
Tsmishatsui, Kowloon, Hong Kong
Phone: 852-2699-2663
Fax: 852-2691-1774

INDIA

Amphenol Interconnect India Pvt. Ltd.

Plot No. 105, Bhosari Industrial Area
Pune, 411026, India
Phone: (91-20) 7120363
Fax: (91-20) 7120581
E-mail: sales@amphenol-in.com

JAPAN

Amphenol Japan, K. K.

689-1, Iseochi Ritto-Shi
Shiga 520-3044, Japan
Phone: 81-77553-8501
Fax: 81-77551-2200

KOREA

Amphenol Daeshin

Bar-Tec Ltd.

#558 Sosa, Songnae
Bucheon City, Kyungki-Do
Korea 420-130
Phone: 82-32-610-3800
Fax: 82-32-673-2507

SINGAPORE

Amphenol East Asia, Ltd.

#25-07, The Concourse
300 Beach Road, Singapore 199555
Phone: 65-2942128
Fax: 65-2943522

TAIWAN

Amphenol Taiwan

No. 116, Lane 956, Zhong Shan Road
Taoyuan City, Taiwan R.O.C. 330
Phone: (886-3) 379-5677
Fax: (886-3) 360-7259

Amphenol® Reverse Bayonet Interconnects for Rugged Environments

SL-394



Amphenol



About Us


Amphenol Industrial is an organization that recognizes customer requirements as our top priority. We are committed to consistently meet and exceed our customers expectations.

With the Amphenol Reverse Bayonet product offering, we have used this philosophy to design, manufacture, and support the Industrial Market with a dependable, ruggedized electrical connector family. With focus in the rail/mass transit process control market, our Interconnect solutions have been engineered to perform in the harshest environments.

Our goal . . . alleviate our customers interconnect burdens and allow them to focus on their present core technologies.



ACA-B

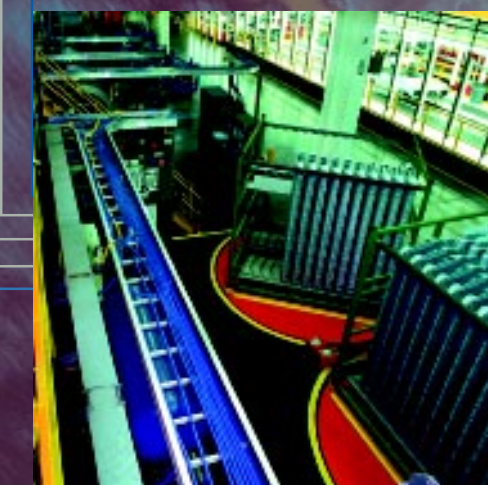

Reverse Bayonet Connectors

GT

Amphenol

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

Amphenol Corporation

Amphenol Industrial Operations

40-60 Delaware Avenue
Sidney, NY 13838-1395
Phone: 607-563-5011
1-800-678-0141
Fax: 607-563-5157
Web: www.amphenol-industrial.com

Amphenol Canada

20 Mellford Drive
Scarborough, ON M1B 2X6 Canada
Phone: 416-291-4401
Telex: 065 25210
Fax: 416-292-0647

SALES OFFICES

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

23276 South Pointe Drive, Suite 113
Laguna Hills, CA 92653
Phone: 949-855-4454
1-800-678-0141
Fax: 949-855-9115

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

7506 East Independence Blvd.
Charlotte, NC 28227
Phone: 704-531-9053
1-800-678-0141
Fax: 704-531-9054

Amphenol Corporation

Amphenol Aerospace

Amphenol Industrial Operations

2010 Corporate Ridge
McLean, VA 22101
Phone: 1-800-678-0141

AUTHORIZED INDUSTRIAL DISTRIBUTORS

Corporate Headquarters

ALPHABETICAL LISTING

APD (All Product Distributors):

Arrow Electronics	Englewood, CO
800-388-2277	
Avnet EMG	Dallas, TX
800-332-8638	
PEI Genesis	Philadelphia, PA
888-254-5920	
Powell Electronics	Philadelphia, PA
800-235-7880	
TTI Inc.	Fort Worth, TX
800-225-5884	

Commercial/Industrial Distributors

Astrex	Plainview, NY
800-633-6360	
Electro Sonic Inc.	Ontario, Canada
800-56-SONIC/416-494-1555	
J&K Connectors	Seattle, WA
206-674-3300	
Nies Electronic	Frankfurt, Germany
(06109)7364-0	
Schuster Elect.	Cincinnati, OH
800-877-6875	

INTERNATIONAL

(Industrial Operations Offices)

Latin America

ARGENTINA

Amphenol Argentina

Avenida Callao 930
2nd floor Office B Plaza
C1023AAP Buenos Aires, Argentina
Phone: (54 11) 48 15 68 86
Fax: (54 11) 48 14 57 79
E-mail: vendas@amphenol.com.ar

BRAZIL

Amphenol do Brasil Ltda.

Rua Diogo Moreira 132
CEP 05423-010
Sao Paulo - SP, Brazil
Phone: (55-11) 3815.1003
Fax: (55-11) 3815.1629
E-mail: vendas@amphenol.com.br

MEXICO

Amphenol Mexico

Prolongacion Reforma 61-6 B2
Col. Paseo de las Lomas
C.P. 01330 Mexico D.F., Mexico
Phone: (52-55) 5258.9984
Fax: (52-55) 5081.6890
E-mail: info@amphenolmexico.com

Europe

AUSTRIA & EASTERN EUROPE

Amphenol Gesellschaft mbH

P.O. Box 63, 3990 DB Houton
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

ENGLAND

Amphenol Limited

Thanet Way, Whitstable
Kent CT5 3JF, Great Britain
Phone: (44-1-227) 773200
Fax: (44-1-227) 276571
Telex: (851) 96157 AMPHNL G

FRANCE

Amphenol Socapex

948 Promenade de l'Arve, BP29
Thyez 74301 Cedex, France
Phone: (33-4) 50892800
Fax: (33-4) 50961941
Telex: MSTH 215709F
ASF CBV TX

GERMANY

Amphenol-Tuchel Elect. GmbH

August-Haesser Strasse 10
Postfach 1110
74001 Heilbronn, Germany
Phone: (49-7131) 929 0
Fax: (49-7131) 929 414
Telex: (841) 728 816 ATEHN D

Amphenol Infocom for UK, Ireland, Germany and France

P.O. Box 63, 3990 DB Houton
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

ITALY

Amphenol Italia S.p.A.

Via Barbaiana 5
20020 Lainate (Milano), Italy
Phone: 39-02-932541
Fax: 39-02-93254444
E-mail: info@amphenol-it.com

BENELUX

Amphenol European Sales Operations

Amphenol Benelux BV

P. O. Box 63, 3990 DB Houton
The Netherlands
Phone: 31-30-6358000
Fax: 31-30-6377034
E-mail: info@amphenol-nl.com

NORDIC AREA

Amphenol Scandinavia

P.O. Box 2047
Johanneslundsvagen 2
19402 Upplands Vasby, Sweden
Phone: 46-8-59410440
Fax: 46-8-59033800
E-mail: info@amphenol-se.com

SPAIN & PORTUGAL

Amphenol Iberica

Edificio "Burgosol" - Oficina No. 55
c/Comunidad de Madrid, 35-bis,
28230 Las Rozas,
Madrid, Spain
Phone: 34-91-6407303
Fax: 34-91-6407307
E-mail: info@amphenol-it.com

SWITZERLAND

Amphenol Switzerland

P.O. Box 63, 3990 DB Houton,
The Netherlands
Phone: 31 30 6358000
Fax: 31 30 6377899
E-mail: info@amphenol-nl.com

Middle East / Africa

ISRAEL

Bar-Tec Ltd.

3 Hagavish St., P.O.B. 279
Kfir-Barkan Bldg., East Industrial Zone
Kfar Sava 44102, Israel
Phone: (972-9) 764.4100
Fax: (972-9) 7674324
E-mail: www.bar-tec.com

SOUTH AFRICA

Amphenol South Africa

30 Impala Road
2196 Sandton - Chislehurst
South Africa
Tel: (27-11) 783-9517
Fax: (27-11) 783-9519
E-mail: amphenol_africa@csi.com

TURKEY

GESTAS

34630, Besyol - Londra Asfalti
Florya Is Merkezi - Kat. 2
Sefakoy / Istanbul, Turkey
Phone: (90-212) 624.52.29
Fax: (90-212) 599.30.68

Asia / Pacific

AUSTRALIA

Amphenol Australia LTD

2 Fineways Blvd.
Keysborough Melbourne, Victoria
3173 Australia
Phone: 613 8796 8888
Fax: 613 8796 8801
E-mail: info@amphenolaust.com.au

CHINA

Amphenol China, Shanghai Liaison Office

ShanghaiMart, Room 11A61
2299 Yanan Road West, Shanghai
200336 PR China
Phone: 86-21-5763-0656
Fax: 86-21-5763-3575
E-mail: achn@amphenol.com.cn

HONG KONG

Amphenol East Asia Ltd.

2201 Railway Plaza
39 Chatham Road South
Tsmishatsui, Kowloon, Hong Kong
Phone: 852-2699-2663
Fax: 852-2691-1774

INDIA

Amphenol Interconnect India Pvt. Ltd.

Plot No. 105, Bhosari Industrial Area
Pune, 411026, India
Phone: (91-20) 7120363
Fax: (91-20) 7120581
E-mail: sales@amphenol-in.com

JAPAN

Amphenol Japan, K. K.

689-1, Iseochi Ritto-Shi
Shiga 520-3044, Japan
Phone: 81-77553-8501
Fax: 81-77551-2200

KOREA

Amphenol Daeshin

Bar-Tec Ltd.

#558 Sosa, Songnae
Bucheon City, Kyungki-Do
Korea 420-130
Phone: 82-32-610-3800
Fax: 82-32-673-2507

SINGAPORE

Amphenol East Asia, Ltd.

#25-07, The Concourse
300 Beach Road, Singapore 199555
Phone: 65-2942128
Fax: 65-2943522

TAIWAN

Amphenol Taiwan

No. 116, Lane 956, Zhong Shan Road
Taoyuan City, Taiwan R.O.C. 330
Phone: (886-3) 379-5677
Fax: (886-3) 360-7259

Amphenol® Reverse Bayonet Interconnects for Rugged Environments

SL-394



Amphenol



About Us


Amphenol Industrial is an organization that recognizes customer requirements as our top priority. We are committed to consistently meet and exceed our customers expectations.

With the Amphenol Reverse Bayonet product offering, we have used this philosophy to design, manufacture, and support the Industrial Market with a dependable, ruggedized electrical connector family. With focus in the rail/mass transit process control market, our Interconnect solutions have been engineered to perform in the harshest environments.

Our goal . . . alleviate our customers interconnect burdens and allow them to focus on their present core technologies.



ACA-B

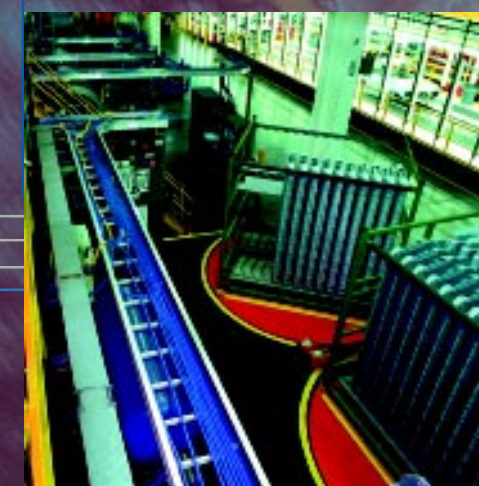

Reverse Bayonet Connectors

GT

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

Amphenol

Amphenol GT Connectors

Designed originally for use by the military, the Heavy Duty GT Connector has become the connector of choice for the Rail/Mass Transit Industry.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
GT00	GT06/ 062/ 064/ 065/ 08
GT01	GT06/ 062/ 064/ 065/ 08
GT02	GT06/ 062/ 064/ 065/ 08
GT030	GT06/ 062/ 064/ 065/ 08
GT06/ 062/ 064/ 065	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GT07/ 070	GT06/ 062/ 064/ 065/ 08
GT08	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GTTB	GT06/ 062/ 064/ 065/ 08

Part Number System

GT **C** **00** **A** **36-5** **P** **W** **(014)**
 1 2 3 4 5 6 7

1. Contact Style and Insert Material

- C = Crimp
- CN = Crimp with stainless steel
- S = Solder
- SN = Solder with stainless steel
- CY = Crimp with Viton
- SY = Solder with Viton
- CL = Crimp with low smoke/flame retardants inserts
- SL = Solder with low smoke/flame retardants inserts

No designation required for Neoprene components

2. Shell Styles

- 00 - Wall mount receptacle
- 01 - Inline receptacle
- 02 - Box mount receptacle
- 020 - Box mount receptacle with accessory threads
- 030 - Square flange receptacle - rear panel mount
- 05 - Dummy receptacle
- 06 - Straight plug
- 062 - Straight plug with deep serrated coupling nut
- 064 - Panel mounted plug with heavy coupling nut
- 065 - Straight plug with long heavy duty coupling nut
- 07 - Jam nut receptacle - rear panel mount
- 070 - Jam nut with accessory threads
- 08 - 90° angle plug
- TB - Thru-bulkhead

3. Connector Class

See catalog 12-024.

4. Shell Size and Arrangements

See catalog 12-024.
 Shell sizes available: 10SL, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, 36, 40

5. Contact Style

P designates pin contacts
 S designates socket contacts

6. Alternate Position

W, X, Y and Z - See catalog 12-024.
 No suffix required for normal position.

7. Connector Modification

Omit for standard olive drab with silver plated contacts
 i.e. : (014) Olive drab cadmium plate, nickel base
 (A24) Gold/nickel plated contacts
 (025) Black zinc cobalt
 (027) Conductive black zinc cobalt
 (024) Green zinc cobalt
 Consult factory for other modifications.

Features and Benefits

- Variety of Shell Styles
- Quick Positive Coupling
- Water Proof
- High Shock, High Vibration
- Solder, Crimp, or PC Tail Contacts
- Broad Operating Temperature Range
- Alternate Materials, Including Fire Retardant Elastomers
- Variety of Finishes Including Nickel, OD Cad, Cad-free Black Zinc Cobalt, and Green Zinc
- Rugged Construction
- More than 275 Layout Patterns Available
- Numerous Back-end Fittings
- Modifications to Meet Your Unique Application Requirements

REVERSE BAYONET

Performance and Design Characteristics

The Amphenol ACA-B and GT Product Families were designed around the electrical parameters of MIL-C-5015. However the unique reverse bayonet quick-disconnect coupling exceeds the environmental requirements of the military specification.

Operating Temperature **-55°C to +125°C**

Electrical Rating **5 Amps to 500 Amps**

Service Rating **Up to 4200V (DC)**

Mating Cycles **500 (ACA-B), 2000+ (GT)**

General Specifications

SHELL	Material: Aluminum Alloy, Stainless Steel also available Finish: Cadmium-Olive Drab, Nickel, non CAD Green Zinc and Black Zinc Cobalt
INSERT	Material: Neoprene, alternates include Silicone, Fluorocarbon, and Flame Retardant Rubber
CONTACTS	Material: Copper Alloy or Brass Finish: Silver and Gold

The GT Interconnect Family is used in door controllers, HVAC systems, cab controls, event recorders, propulsion systems, and other rail applications that demand reliable electrical interconnects.

Amphenol ACA-B Connectors

The ACA-B Connector Family was developed especially for Industrial Usage and performs in the most Rugged Environments.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
ACA 3100	ACA3106/ ACA3108
ACA 3101	ACA3106/ ACA3108
ACA 3102	ACA3106/ ACA3108
ACA 3103	ACA3106/ ACA3108
ACA 3105	ACA3106/ ACA3108
ACA 3106	ACA3101/ ACA3102/ ACA3103, ACA3105
ACA 3108	ACA3101/ ACA3102/ ACA3103, ACA3105

Part Number System

ACA **3106** **E** **18** **1** **S** **X** **B** - *******
 1 2 3 4 5 6 7 8 9

1. Series

ACA Circular Connector Family

2. Shell Styles

- 3100 - Wall mount receptacle
- 3101 - Cable connecting plug
- 3102 - Front box mount receptacle
- 3103 - Rear box mount receptacle
- 3105 - Dummy receptacle
- 3106 - Plug straight
- 3108 - Plug 90°

3. Class

- E - Environmental with resilient insulators and endbell with clamp and bushing
- F - Environmental with resilient insulator and endbell with rear accessory threads
- R - Environmental with resilient insulator and shortened light-weight endbell without cable clamp

4. Shell Size

10SL, 12S, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, and 36

5. Contact Arrangement

See catalog 12-027

6. Contact Type

- P - Pin
- S - Socket

7. Alternate Position


W, X, Y and Z
 No suffix required for normal position.

8. Reverse Bayonet Coupling

9. Connector Modification

- F80 - Crimp contacts
- A232 - Black zinc cobalt
- A176 - Solid plated contacts
- Consult factory for other modifications

PROCESS CONTROLS

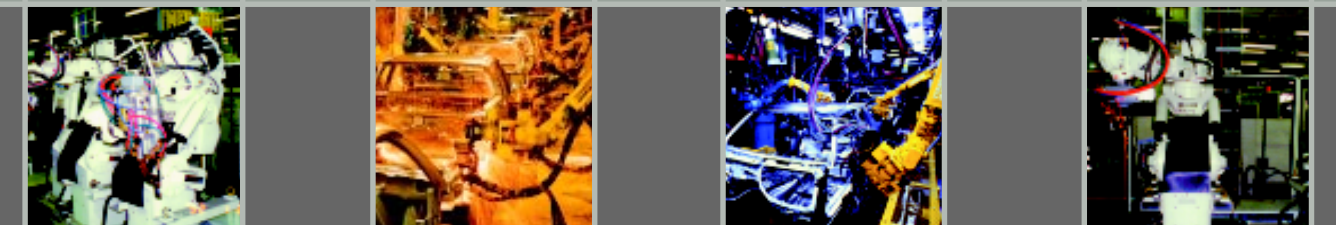

The ACA-B Family of Connectors offers a dependable interconnect for applications in process control, industrial machinery, test and measurement equipment, robotic assembly, and other industrial applications.

Amphenol GT Connectors

Designed originally for use by the military, the Heavy Duty GT Connector has become the connector of choice for the Rail/Mass Transit Industry.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
GT00	GT06/ 062/ 064/ 065/ 08
GT01	GT06/ 062/ 064/ 065/ 08
GT02	GT06/ 062/ 064/ 065/ 08
GT030	GT06/ 062/ 064/ 065/ 08
GT06/ 062/ 064/ 065	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GT07/ 070	GT06/ 062/ 064/ 065/ 08
GT08	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GTTB	GT06/ 062/ 064/ 065/ 08

Part Number System

GT C 00 A 36-5 P W (014)
1 2 3 4 5 6 7

1. Contact Style and Insert Material

- C = Crimp
- CN = Crimp with stainless steel
- S = Solder
- SN = Solder with stainless steel
- CY = Crimp with Viton
- SY = Solder with Viton
- CL = Crimp with low smoke/flame retardants inserts
- SL = Solder with low smoke/flame retardants inserts

No designation required for Neoprene components

2. Shell Styles

- 00 - Wall mount receptacle
- 01 - Inline receptacle
- 02 - Box mount receptacle
- 020 - Box mount receptacle with accessory threads
- 030 - Square flange receptacle - rear panel mount
- 05 - Dummy receptacle
- 06 - Straight plug
- 062 - Straight plug with deep serrated coupling nut
- 064 - Panel mounted plug with heavy coupling nut
- 065 - Straight plug with long heavy duty coupling nut
- 07 - Jam nut receptacle - rear panel mount
- 070 - Jam nut with accessory threads
- 08 - 90° angle plug
- TB - Thru-bulkhead

3. Connector Class

See catalog 12-024.

4. Shell Size and Arrangements

See catalog 12-024.
Shell sizes available: 10SL, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, 36, 40

5. Contact Style

P designates pin contacts
S designates socket contacts

6. Alternate Position

W, X, Y and Z - See catalog 12-024.
No suffix required for normal position.

7. Connector Modification

Omit for standard olive drab with silver plated contacts
i.e. : (014) Olive drab cadmium plate, nickel base
(A24) Gold/nickel plated contacts
(025) Black zinc cobalt
(027) Conductive black zinc cobalt
(024) Green zinc cobalt
Consult factory for other modifications.

Features and Benefits

- Variety of Shell Styles
- Quick Positive Coupling
- Water Proof
- High Shock, High Vibration
- Solder, Crimp, or PC Tail Contacts
- Broad Operating Temperature Range
- Alternate Materials, Including Fire Retardant Elastomers
- Variety of Finishes Including Nickel, OD Cad, Cad-free Black Zinc Cobalt, and Green Zinc
- Rugged Construction
- More than 275 Layout Patterns Available
- Numerous Back-end Fittings
- Modifications to Meet Your Unique Application Requirements

REVERSE BAYONET

Performance and Design Characteristics

The Amphenol ACA-B and GT Product Families were designed around the electrical parameters of MIL-C-5015. However the unique reverse bayonet quick-disconnect coupling exceeds the environmental requirements of the military specification.

Operating Temperature -55°C to +125°C

Electrical Rating 5 Amps to 500 Amps

Service Rating Up to 4200V (DC)

Mating Cycles 500 (ACA-B), 2000+ (GT)

General Specifications

SHELL	Material: Aluminum Alloy, Stainless Steel also available Finish: Cadmium-Olive Drab, Nickel, non CAD Green Zinc and Black Zinc Cobalt
INSERT	Material: Neoprene, alternates include Silicone, Fluorocarbon, and Flame Retardant Rubber
CONTACTS	Material: Copper Alloy or Brass Finish: Silver and Gold

The GT Interconnect Family is used in door controllers, HVAC systems, cab controls, event recorders, propulsion systems, and other rail applications that demand reliable electrical interconnects.

Amphenol ACA-B Connectors

The ACA-B Connector Family was developed especially for Industrial Usage and performs in the most Rugged Environments.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
ACA 3100	ACA3106/ ACA3108
ACA 3101	ACA3106/ ACA3108
ACA 3102	ACA3106/ ACA3108
ACA 3103	ACA3106/ ACA3108
ACA 3105	ACA3106/ ACA3108
ACA 3106	ACA3101/ ACA3102/ ACA3103, ACA3105
ACA 3108	ACA3101/ ACA3102/ ACA3103, ACA3105

Part Number System

ACA 3106 E 18 1 S X B - ***
1 2 3 4 5 6 7 8 9

1. Series

ACA Circular Connector Family

2. Shell Styles

- 3100 - Wall mount receptacle
- 3101 - Cable connecting plug
- 3102 - Front box mount receptacle
- 3103 - Rear box mount receptacle
- 3105 - Dummy receptacle
- 3106 - Plug straight
- 3108 - Plug 90°

3. Class

- E - Environmental with resilient insulators and endbell with clamp and bushing
- F - Environmental with resilient insulator and endbell with rear accessory threads
- R - Environmental with resilient insulator and shortened light-weight endbell without cable clamp

4. Shell Size

10SL, 12S, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, and 36

5. Contact Arrangement

See catalog 12-027

6. Contact Type

- P - Pin
- S - Socket

7. Alternate Position


W, X, Y and Z
No suffix required for normal position.

8. Reverse Bayonet Coupling

9. Connector Modification

- F80 - Crimp contacts
- A232 - Black zinc cobalt
- A176 - Solid plated contacts
- Consult factory for other modifications

PROCESS CONTROLS

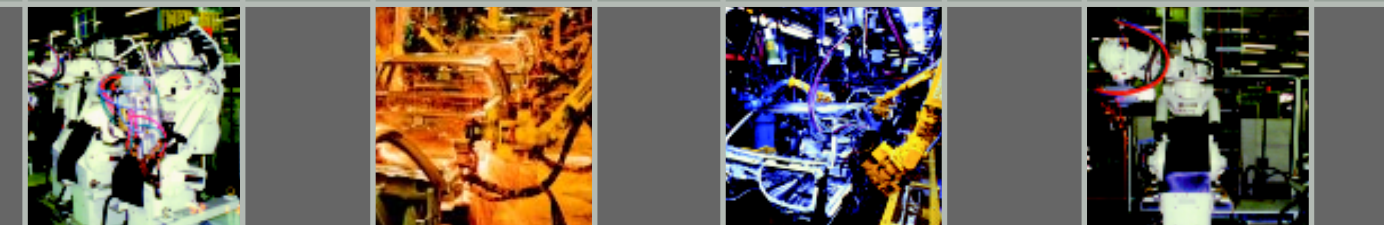

The ACA-B Family of Connectors offers a dependable interconnect for applications in process control, industrial machinery, test and measurement equipment, robotic assembly, and other industrial applications.

Amphenol GT Connectors

Designed originally for use by the military, the Heavy Duty GT Connector has become the connector of choice for the Rail/Mass Transit Industry.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
GT00	GT06/ 062/ 064/ 065/ 08
GT01	GT06/ 062/ 064/ 065/ 08
GT02	GT06/ 062/ 064/ 065/ 08
GT030	GT06/ 062/ 064/ 065/ 08
GT06/ 062/ 064/ 065	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GT07/ 070	GT06/ 062/ 064/ 065/ 08
GT08	GT00/ 01/ 02/ 020/ 03/ 030/ 05/ 070/ TB
GTTB	GT06/ 062/ 064/ 065/ 08

Part Number System

GT C 00 A 36-5 P W (014)
1 2 3 4 5 6 7

1. Contact Style and Insert Material

- C = Crimp
- CN = Crimp with stainless steel
- S = Solder
- SN = Solder with stainless steel
- CY = Crimp with Viton
- SY = Solder with Viton
- CL = Crimp with low smoke/flame retardants inserts
- SL = Solder with low smoke/flame retardants inserts

No designation required for Neoprene components

2. Shell Styles

- 00 - Wall mount receptacle
- 01 - Inline receptacle
- 02 - Box mount receptacle
- 020 - Box mount receptacle with accessory threads
- 030 - Square flange receptacle - rear panel mount
- 05 - Dummy receptacle
- 06 - Straight plug
- 062 - Straight plug with deep serrated coupling nut
- 064 - Panel mounted plug with heavy coupling nut
- 065 - Straight plug with long heavy duty coupling nut
- 07 - Jam nut receptacle - rear panel mount
- 070 - Jam nut with accessory threads
- 08 - 90° angle plug
- TB - Thru-bulkhead

3. Connector Class

See catalog 12-024.

4. Shell Size and Arrangements

See catalog 12-024.
Shell sizes available: 10SL, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, 36, 40

5. Contact Style

P designates pin contacts
S designates socket contacts

6. Alternate Position

W, X, Y and Z - See catalog 12-024.
No suffix required for normal position.

7. Connector Modification

Omit for standard olive drab with silver plated contacts
i.e. : (014) Olive drab cadmium plate, nickel base
(A24) Gold/nickel plated contacts
(025) Black zinc cobalt
(027) Conductive black zinc cobalt
(024) Green zinc cobalt
Consult factory for other modifications.

Features and Benefits

- Variety of Shell Styles
- Quick Positive Coupling
- Water Proof
- High Shock, High Vibration
- Solder, Crimp, or PC Tail Contacts
- Broad Operating Temperature Range
- Alternate Materials, Including Fire Retardant Elastomers
- Variety of Finishes Including Nickel, OD Cad, Cad-free Black Zinc Cobalt, and Green Zinc
- Rugged Construction
- More than 275 Layout Patterns Available
- Numerous Back-end Fittings
- Modifications to Meet Your Unique Application Requirements

REVERSE BAYONET

Performance and Design Characteristics

The Amphenol ACA-B and GT Product Families were designed around the electrical parameters of MIL-C-5015. However the unique reverse bayonet quick-disconnect coupling exceeds the environmental requirements of the military specification.

Operating Temperature -55°C to +125°C

Electrical Rating 5 Amps to 500 Amps

Service Rating Up to 4200V (DC)

Mating Cycles 500 (ACA-B), 2000+ (GT)

General Specifications

SHELL	Material: Aluminum Alloy, Stainless Steel also available Finish: Cadmium-Olive Drab, Nickel, non CAD Green Zinc and Black Zinc Cobalt
INSERT	Material: Neoprene, alternates include Silicone, Fluorocarbon, and Flame Retardant Rubber
CONTACTS	Material: Copper Alloy or Brass Finish: Silver and Gold

The GT Interconnect Family is used in door controllers, HVAC systems, cab controls, event recorders, propulsion systems, and other rail applications that demand reliable electrical interconnects.

Amphenol ACA-B Connectors

The ACA-B Connector Family was developed especially for Industrial Usage and performs in the most Rugged Environments.



MATEABILITY WITH IDENTICAL CONTACT ARRANGEMENTS

Connector Style	Mateable with Style
ACA 3100	ACA3106/ ACA3108
ACA 3101	ACA3106/ ACA3108
ACA 3102	ACA3106/ ACA3108
ACA 3103	ACA3106/ ACA3108
ACA 3105	ACA3106/ ACA3108
ACA 3106	ACA3101/ ACA3102/ ACA3103, ACA3105
ACA 3108	ACA3101/ ACA3102/ ACA3103, ACA3105

Part Number System

ACA 3106 E 18 1 S X B - ***
1 2 3 4 5 6 7 8 9

1. Series

ACA Circular Connector Family

2. Shell Styles

- 3100 - Wall mount receptacle
- 3101 - Cable connecting plug
- 3102 - Front box mount receptacle
- 3103 - Rear box mount receptacle
- 3105 - Dummy receptacle
- 3106 - Plug straight
- 3108 - Plug 90°

3. Class

- E - Environmental with resilient insulators and endbell with clamp and bushing
- F - Environmental with resilient insulator and endbell with rear accessory threads
- R - Environmental with resilient insulator and shortened light-weight endbell without cable clamp

4. Shell Size

10SL, 12S, 14S, 16S, 16, 18, 20, 22, 24, 28, 32, and 36

5. Contact Arrangement

See catalog 12-027

6. Contact Type

- P - Pin
- S - Socket

7. Alternate Position


W, X, Y and Z
No suffix required for normal position.

8. Reverse Bayonet Coupling

9. Connector Modification

- F80 - Crimp contacts
- A232 - Black zinc cobalt
- A176 - Solid plated contacts
- Consult factory for other modifications

PROCESS CONTROLS

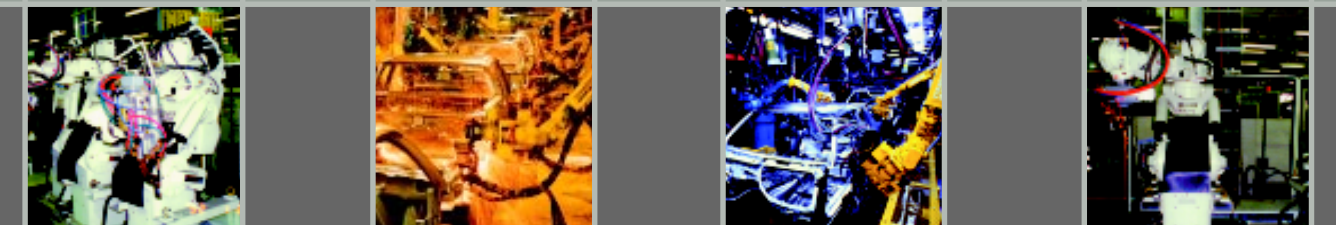

The ACA-B Family of Connectors offers a dependable interconnect for applications in process control, industrial machinery, test and measurement equipment, robotic assembly, and other industrial applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular DIN Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[CTV06RQF-25-8SA-LC](#) [CTV06RQF-25-8S-LC](#) [CTV06RQW-25-8SB-LC](#) [CTV06RW-25-20P](#) [CTV06RW-25-20PA](#) [CTV06RW-25-20PB](#)
[CTV06RW-25-20PE-LC](#) [CTV06RW-25-20SB](#) [CTV06RW-25-20SE](#) [CTV07RW-17-8S\(506\)](#) [CTVP00RW-19-32S\(506\)](#) [CTVP00RW-9-35S\(506\)](#) [M83723/71R20416](#) [M83723/71R22196](#) [M83723/71W2039N](#) [M83723/71W24196](#) [M83723/71W2419N](#) [M83723/72A1404N-LC](#)
[M83723/72R1203N](#) [M83723/72W20418](#) [M83723/72W22126](#) [M83723/72W22556](#) [M83723/72W2419N](#) [M83723/72W2461N](#)
[M83723/73R2028N](#) [M83723/73R2039N](#) [M83723/73W1412N](#) [M83723/73W2039N](#) [M83723/74R1624N](#) [M83723/74R1808N](#)
[M83723/74R2212N](#) [M83723/74W1203N](#) [M83723/74W1412N](#) [M83723/74W20416](#) [M83723/74W2041N](#) [M83723/75R10058](#)
[M83723/75W2232N](#) [M83723/76R14157](#) [M83723/76R20256](#) [M83723/76W1808N](#) [M83723/76W2016N](#) [M83723/76W2461N](#)
[M83723/77W2016N](#) [M83723/78R22327](#) [M83723/78W2212N](#) [M83723/78W22556](#) [M85049/50-5F](#) [D38999/20FF11AC](#) [D38999/20FJ20BB](#)
[D38999/20FJ20SC](#)