


BNC

50 Ω


CABLE CLAMP FOR FLEXIBLE CABLES

STRAIGHT PLUG

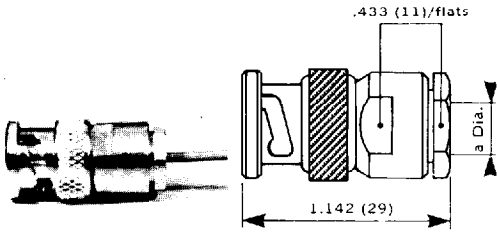


| | | |
|-----------------|------------------|------------------|
| CABLE DIA. | .079 (2) | .102 (2,6) |
| Ω | 50 | 50 + 75 |
| PART NUMBER | R 141 003 | R 141 004 |
| a dia. max. | .086 (2,2) | .116 (2,95) |
| Captive contact | YES | YES |
| Assembly | M 04 | M 04 |

STRAIGHT PLUG

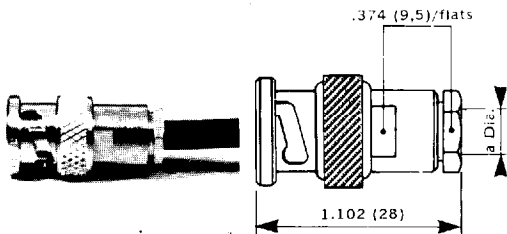


| | | | | |
|-----------------|------------------|------------------|------------------|------------------|
| CABLE DIA. | .138 (3,5) | .197 (5) | .236 (6) | .236 (6) |
| Ω | 50 + 75 | 50 | 75 | 50 + 75 |
| PART NUMBER | R 141 005 | R 141 007 | R 141 011 | R 141 015 |
| Equivalent. MIL | | UG. 88/U | UG. 260/U | |
| a dia. max. | .145 (3,7) | .220 (5,6) | .256 (6,5) | .268 (6,8) |
| Captive contact | NO | NO | NO | NO |
| Assembly | M 01 | M 01 | M 01 | M 01 |

STRAIGHT PLUG



| | | | | | | |
|-----------------|------------------|------------------|------------------|------------------|------------------|------------------|
| CABLE DIA. | .197 (5) | .197 (5) | .197 (5) | .236 (6) | .236 (6) | .236 (6) |
| Ω | 50 | 50 | 50 | 75 + 93 | 75 + 93 | 75 + 93 |
| PART NUMBER | R 141 008 | R 141 009 | R 141 010 | R 141 012 | R 141 013 | R 141 014 |
| Equivalent. MIL | UG. 88 C/U | UG. 88 E/U | UG. 88 G/U | UG. 260 B/U | UG. 260 D/U | |
| Equivalent. MIL | | KBN 1 | | | KBN 11 | |
| a dia. max. | .220 (5,6) | .220 (5,6) | .220 (5,6) | .260 (6,6) | .260 (6,6) | .260 (6,6) |
| Captive contact | NO | NO | YES | NO | NO | YES |
| Assembly | M 02 | M 02 | M 02 | M 02 | M 02 | M 02 |

STRAIGHT PLUG

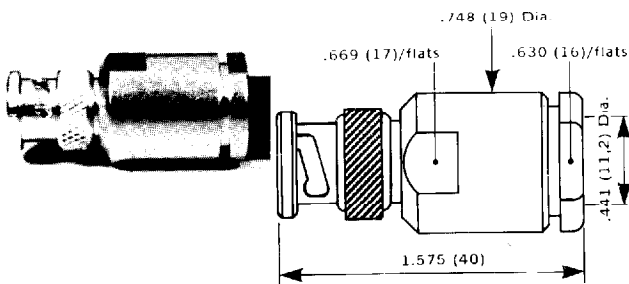

| | |
|-----------------|-----------------------|
| CABLE DIA. | .394 (10) + .433 (11) |
| Ω | 50 |
| PART NUMBER | R 141 018 |
| Captive contact | YES |
| Assembly | M 08 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#)