
Technical Data Sheet

STRAIGHT JACK RECEPTACLE PIN IN PASTE - FULL DETENT

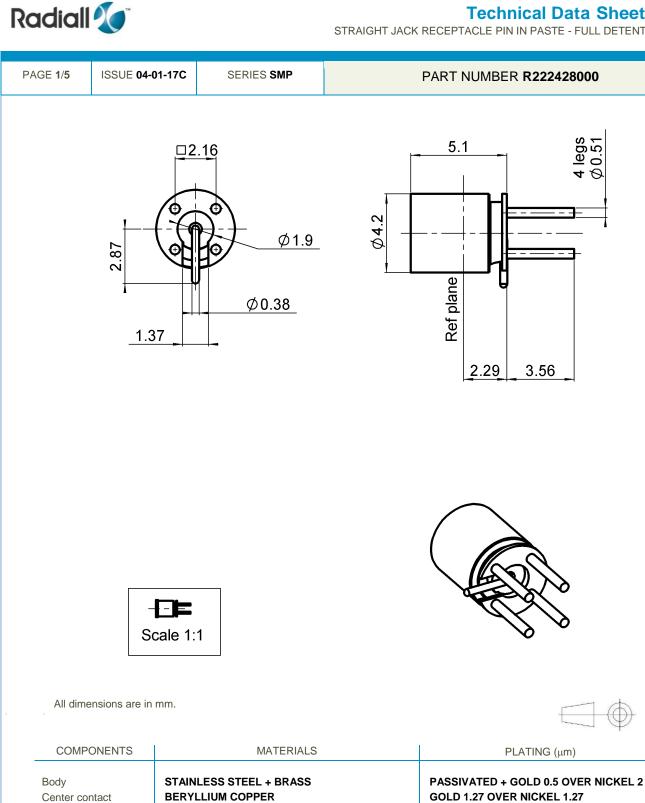

-

-

-

Outer contact Insulator

Gasket Others parts PTFE

-

-

_



Technical Data Sheet

STRAIGHT JACK RECEPTACLE PIN IN PASTE - FULL DETENT

PAGE 2/5	ISSUE 04-01-17C	SERIES SMP			PART NUMBER R222428000		
			PACK	AGING			
			Uni		Other]	
	l	100	Contac	ct us	Contact us		
	ELECTRICAL CHARA	ACTERISTICS					
Impedance Frequency VSWR*** Insertion loss RF leakage Voltage rating Dielectric withsta Insulation resista		50 Ω 0-40* GHz 0,0000 x F(GHz) 0.12* √F(GHz) NA - F(GHz) 335 Veff Maxi 500 Veff mini 5000 MΩ mini	dB Maxi dB Maxi	Herme	<u>ENVI</u> ting temperature tic seal leakage	RONMENTAL -65/+165 NA NA	°C Atm.cm3/s
MECHANICAL CHARACTERISTICS Center contact retention Axial force – Mating End 6.8 N mini Axial force – Opposite end 6.8 N mini Torque NA N.cm mini				SPECIFICATION			
Torque Recommended	torquo	NA N.c	m mini		OTHER C	HARACTERIST	ICS
Mating Panel nut	lorque	NA N.cm NA N.cm		Assemb	ly instruction:		
Mating life Weight	O	100 Cycles mini ,3500 g					
				Others: Compliant with MIL-STD-348 *Coaxial Transmission Line Only **DC-12.4 Ghz (Coaxial Transmission Line Only) ***Performance strongly depends on layout and PCB material			

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.



Technical Data Sheet

STRAIGHT JACK RECEPTACLE PIN IN PASTE - FULL DETENT


PAGE 3/5 ISSUE 04-01-17C

SERIES SMP

PART NUMBER R222428000


SOLDER PROCEDURE

- Deposition of solder paste 'Sn Ag4 Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux. We advise a thickness of 150 microns (5.85 microinch). Verify that the edges of the zone are clean.
- Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type.
 Video camera is recommended for the positioning of the component. Adhesive agents must not be used on the receptacle.
- Soldering by infra-red reflow. Below, please find the typical profile to use.
- 4. Cleaning of printed circuit boards.
- 5. Checking of solder joints and position of the component by visual inspection.

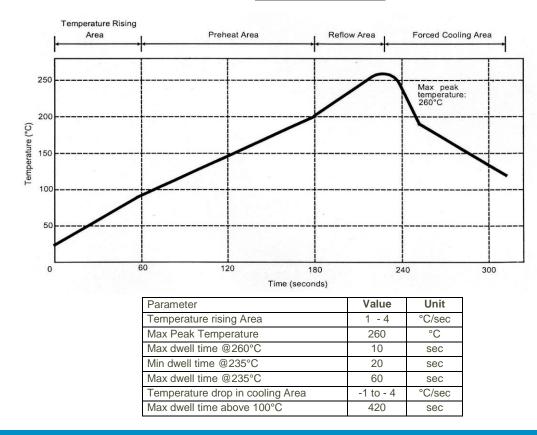

TEMPERATURE PROFILE

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

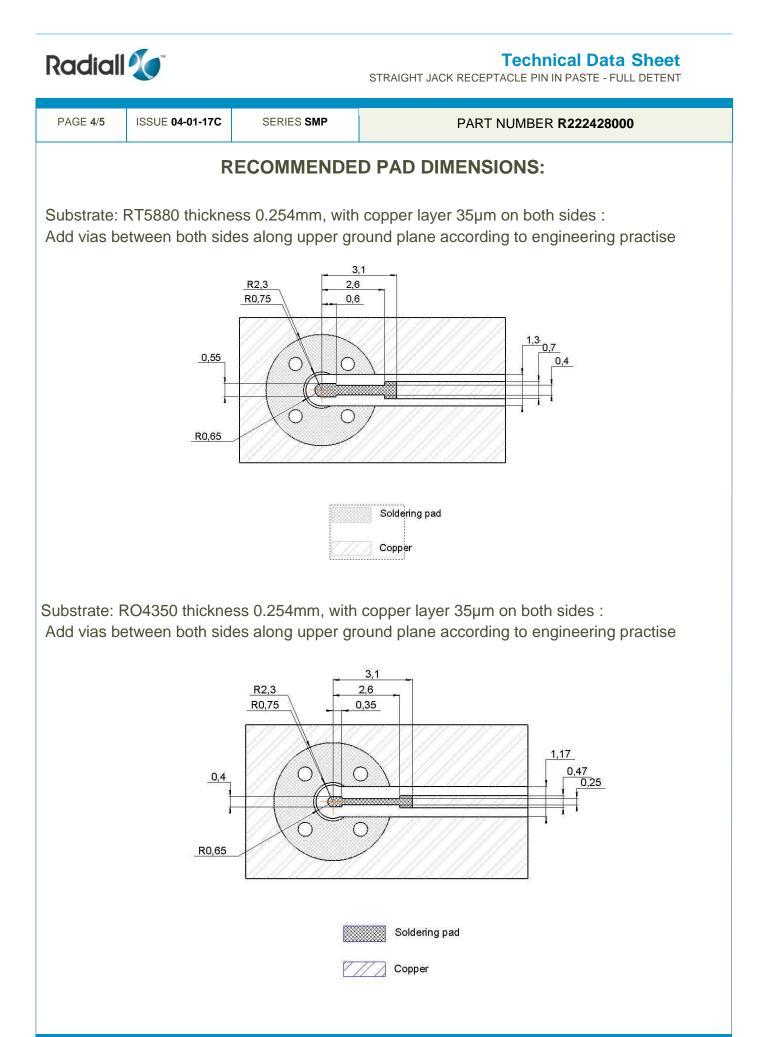


This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.



Substrate: RO6002 thickness 0.254mm, with copper layer 35µm on both sides :

Add vias between both sides along upper ground plane according to engineering practise

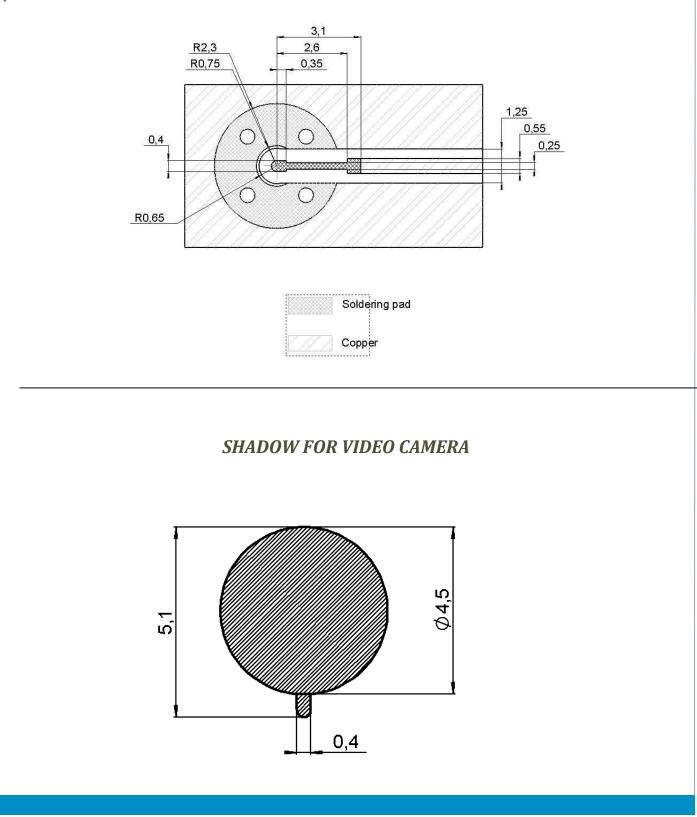

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Radiall manufacturer:

Other Similar products are found below :

 8915-1511-000
 89674-0827
 6001-7071-019
 6002-7051-003
 6002-7551-202
 6059674-1
 619550-1
 630059-000
 M39030/3-01N
 6500-7071

 046
 6769
 CX050L2AQ
 7002-1541-010
 7002-1542-011
 7004-1512-000
 7009-1511-004
 7010-1511-000
 7029-1511-060
 7101-1541-010

 7101-1571-002
 7145-1521-002
 7203-1571-003
 7209-1511-011
 7210-1511-015
 7210-1511-019
 73137-5015
 73216-2241
 73404-2300
 7405

 1521-005
 7405-1521-802
 8527
 8547
 FS11V
 877931
 8808-1511-001
 9049-9513-000
 9074-9513-000
 9101-9573-002
 910A205F
 9130

 9573-002
 PL11SC-026
 PL375-33
 PL40-5
 PL74C-221
 PL75MC-217
 PL803-7
 980-8666-005
 1200690078
 1-201144-1
 R107003010W