


Heavy-duty Miniature Relay

- Incorporates environment-friendly, cadmium-free contacts.
- Variety of contact forms: SPDT or SPST-NO (continuous current rating: 8 A)
- Mechanical and electrical characteristics comply with VDE0435.
- Satisfies VDE0700 requirements with a dielectric strength of 4 kV at a distance of 8 mm.
- Satisfies C/250 insulation requirements of VDE0110.
- Tracking resistance: CTI>250
- Conforms to class II, part 1 of VDE0106.

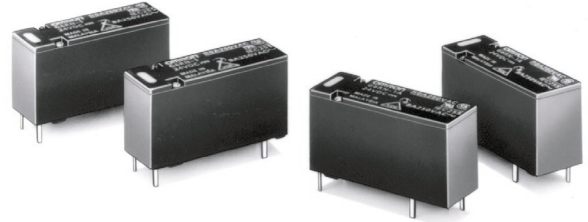

Ordering Information

| Classification | Enclosure ratings | Contact material | Contact form | |
|----------------|-------------------|-------------------------------|--------------|------------|
| | | | SPST-NO | SPDT |
| Standard | Fully sealed | AgNi + gold plating (0.35 μ) | G6RN-1A | G6RN-1 |
| | | AgNi | G6RN-1A-ANI | G6RN-1-ANI |
| | | AgCdO + gold plating (0.35 μ) | G6RN-1A-ACD | G6RN-1-ACD |
| | | AgCdO | G6RN-1A-CDM | G6RN-1-CDM |
| | | AgNi + gold plating (4 μ) | G6RN-1A-AP4 | G6RN-1-AP4 |

Note: When ordering, add the rated coil voltage to the model number.

Example: G6RN-1A 24 VDC
└───┘ Rated coil voltage

Model Number Legend

G6RN- VDC
1 2 3 4

1. Number of Poles

1: 1 pole

2. Contact Form

None: SPDT

A: SPST-NO

3. Contact Material

None: AgNi + gold plating (0.35 μ)

ANI: AgNi

ACD: AgCdO + gold plating (0.35 μ)

CDM: AgCdO

AP4: AgNi + gold plating (4 μ)

4. Rated Coil Voltage

5, 12, 24, 48 VDC

Specifications

■ Coil Ratings

| | | | | |
|----------------------|---|---------|---------|----------------|
| Rated voltage | 5 VDC | 12 VDC | 24 VDC | 48 VDC |
| Rated current | 44 mA | 18.3 mA | 9.2 mA | 5.2 mA |
| Coil resistance | 114 Ω | 655 Ω | 2,620 Ω | 9,210 Ω |
| Must operate voltage | 70% max. of rated voltage | | | |
| Must release voltage | 10% min. of rated voltage | | | |
| Max. voltage | 110% of rated voltage at max. temperature (at 85°C) | | | |
| Power consumption | Approx. 220 mW | | | Approx. 250 mW |

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.

■ Contact Ratings

| | |
|--------------------------------|--|
| Load | Resistance load (cos φ = 1) |
| Rated load | 8 A at 250 VAC; 5 A at 30 VDC |
| Rated carry current | 8 A |
| Max. switching voltage | 250 VAC; 30 VDC, (400 VAC) (see note) |
| Max. switching current | AC 8 A; DC 5 A |
| Max. switching power | 2,000 VA; 150 W |
| Failure rate (reference value) | 5 VDC 10 mA (for gold plating 0.35 μ min.) |

Note: Electrical life expectancy is reduced.

■ Characteristics

| | |
|--------------------------|--|
| Operate time | Approx. 6 ms |
| Release time | Approx. 3 ms |
| Max. operating frequency | Mechanical: 36,000 operations/hr Electrical: 360 operations/hr (under rated load) |
| Insulation resistance | 1,000 MΩ min. (at 500 VDC) |
| Dielectric strength | 4,000 VAC between coil and contacts 1,000 VAC between contacts |
| Creepage/clearance | 8 mm min. between coil and contacts |
| Vibration resistance | Malfunction: NO: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) NC: 10 to 55 to 10 Hz, 0.4-mm single amplitude (0.8-mm double amplitude) |
| Shock resistance | Destruction: 1,000 m/s ² |
| Endurance | Mechanical: 10,000,000 operations min. Electrical: Approx. 100,000 operations |
| Ambient temperature | Operating: -40°C to 85°C (with no icing) |
| Ambient humidity | Operating: 5% to 85% |
| Weight | Approx. 9 g |
| Protection class | II according to VDE0106 Part 1 |
| Insulation class | C/250, B/380 according to VDE0110 |

■ Approved Standards

IEC255 (Includes Reinforced Insulation and Spacing Requirements According to IEC65, 335-1, 950, EN60335-1, 60950)

| Standard | Contact form | Coil ratings | Contact ratings | Conditions |
|----------------------------|-----------------|---------------------------------|---|---|
| IEC255-1-00 IEC255-0-20 | SPDT SPST-NO | 5, 6, 12, 18, 24, 36, 48 VDC | 8 A at 250 VAC (cosφ = 1) (see note) | Pollution degree: 3 Overvoltage category: II Operating range: class 1 Pick-up class: class C Ambient temperature: -40°C to 85°C |

Note: VAC according to IEC417.

VDE

| Standard | Contact form | Coil ratings | Contact ratings | Conditions |
|------------------------------------|-----------------|---------------------------------|-----------------------------------|---|
| VDE0435 Part201 VDE0435 Part120 | SPDT SPST-NO | 5, 6, 12, 18, 24, 36, 48 VDC | 8 A at 250 VAC ($\cos\phi = 1$) | Insulation group according to VDE0110 C/250, B/380 Operating range: class 1 Pick-up class: class C Ambient temperature: -40°C to 85°C |




UL508 (File No. E41515)

| Coil rating | Contact rating |
|-------------|--|
| 5 to 48 VDC | 10 A at 250 VAC (resistive) 5 A at 30 VDC (resistive) 8 A at 250 VAC (resistive) (ambient temperature: 85°C) |

CSA C22.2 (File No. LR31928-543)

| Coil rating | Contact rating |
|-------------|--|
| 5 to 48 VDC | 10 A at 250 VAC (resistive) 5 A at 30 VDC (resistive) 8 A at 250 VAC (resistive) (ambient temperature: 85°C) |

Engineering Data

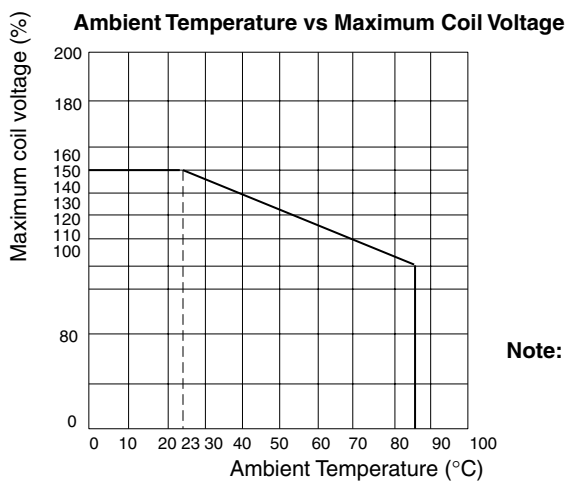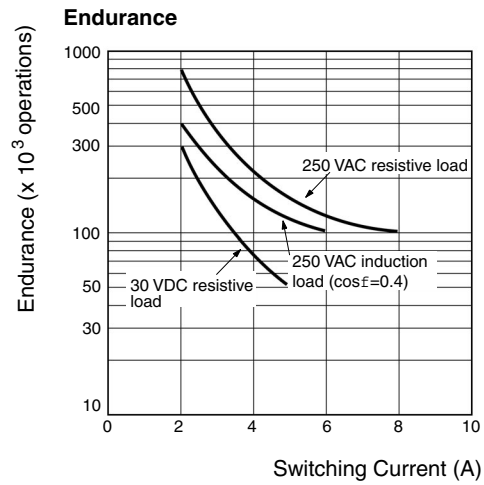
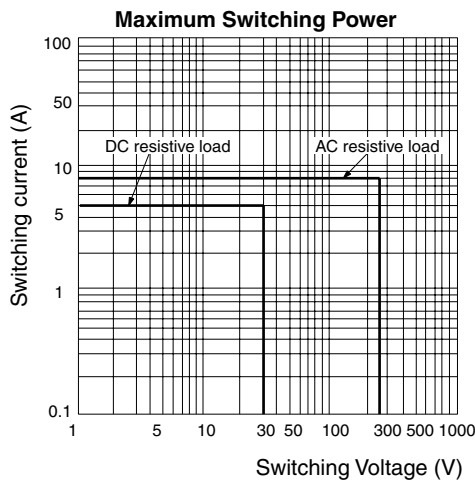


Note: The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

Dimensions


Note: All units are in millimeters unless otherwise indicated.

SPDT Type

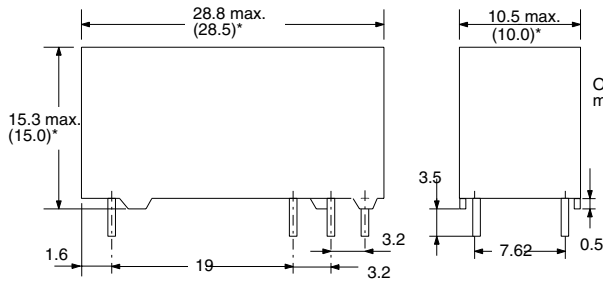


*Average value.

Terminal Arrangement/ Internal Connections (Bottom View)





Mounting Holes (Bottom View)

Tolerance: ± 0.1




SPST-NO Type

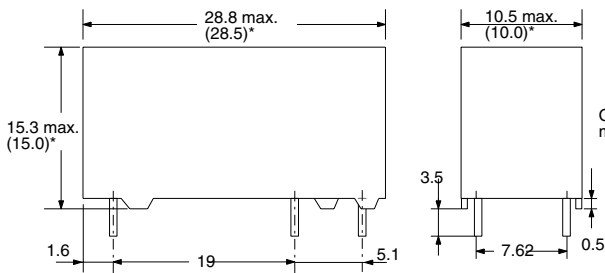


*Average value.

Terminal Arrangement/ Internal Connections (Bottom View)



Mounting Holes (Bottom View)

Tolerance: ± 0.1

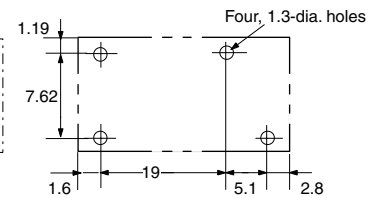

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Omron](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)