

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



2 W

DC- 18 GHz


SMA

COAXIAL ATTENUATOR

issue  
31.Oct.97

Page  
1 / 1

**DRAWING**

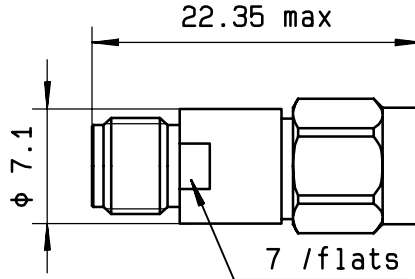

General tolerances: +/- 0.5 mm

**R F CHARACTERISTICS**

FREQUENCY RANGE : DC - 18 GHz  
 IMPEDANCE : 50 Ohms  
 ATTENUATION - NOMINAL : 4.00 dB

FREQUENCY	DC- 2 GHz	2 - 4 GHz	4 - 8 GHz	8 -12.4GHz	12.4- 18 GHz
V.S.W.R	<= 1.10	<= 1.15	<= 1.20	<= 1.25	<= 1.35
DEVIATION (dB)	+0.3 /- 0.3	+0.3 /- 0.3	+0.3 /- 0.3	+0.3 /- 0.3	+0.3 /- 0.3

TEMPERATURE SENSITIVITY :  $4 \times 10^{-4}$  dB / (dB \* °C)


PEAK POWER at 25°C (1µs,1%.) : 100 W  
 AVERAGE POWER at 25°C : 2 W

**MECHANICAL CHARACTERISTICS**

CONNECTORS : SMA male/female per MIL-C 39012  
 WEIGHT : < 5 g

**ENVIRONMENTAL CHARACTERISTICS**

OPERATING TEMPERATURE RANGE (°C) : -55 , +125  
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

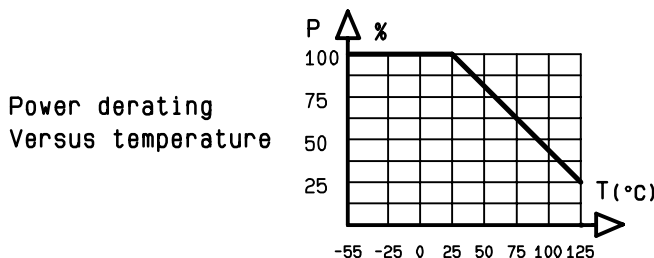

CREATION				
N° :				
PEN/EP:CAT				
Name:MG				
Date:31.Oct.97				
APP.:AF	ISSUE	REVISIONS	NAME	APPR.

**RADIALL®**

101. rue P. Hoffmann -Z.I Ouest-  
 93116 ROSNY/BOIS Cedex-FRANCE  
 Phone:33(1)49353535  
 Fax :33(1)48546363  
 Tlx RADIA 235220F

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Attenuators - Interconnects](#) category:*

*Click to view products by [Radiall](#) manufacturer:*

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [R415303000](#) [BNC-13](#) [R411800121](#)  
[R411801121](#) [R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#)  
[R416010000](#) [R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#)  
[R412501124](#) [HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#)  
[R443131000](#) [R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#)