




WIDE BAND COAXIAL DETECTOR

Issue
31. aug. 94

Page
1 / 1

DRAWING

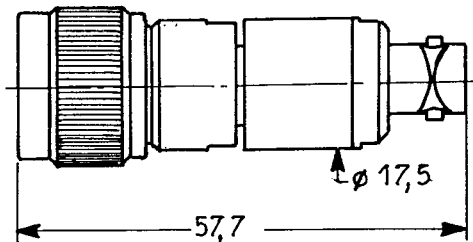

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE	:	0.01-12.4GHz
IMPEDANCE	:	50 Ohms
V.S.W.R	0.01- 8 GHz	: <= 1.35
	0.01-12.4GHz	: <= 1.50
FREQUENCY RESPONSE	0.01- 8 GHz	: ± 0.2 dB/octave
	0.01-12.4GHz	: ± 0.5 dB
SENSITIVITY:		
LOW LEVEL (Input power<-20 dBm)	:	>=500 mV/mW
HIGH LEVEL (Input power=0.35 mW)	:	>=100 mV
POLARITY	:	negative
TANGENTIAL SENSITIVITY	:	>= -44 dBm
SQUARE LOW RESPONSE LIMIT	:	-12 dBm
VIDEO IMPEDANCE	:	1 KOhm typical
FILTERING CAPACITY	:	20 pF typical
AVERAGE POWER	:	200 mW
DIODE	:	schottky "zero bias"
DETECTOR MODULE P/N	:	R451950000

MECHANICAL CHARACTERISTICS

INPUT CONNECTOR	:	N male	per MIL-C 39012
VIDEO OUTPUT CONNECTOR	:	BNC female	per MIL-C 39012
WEIGHT	:	< 120 g	

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	(°C)	:	-25	,	+70
STORAGE TEMPERATURE RANGE	(°C)	:	-65	,	+125

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary 4412-9242

CREATION					
N° :					
PEN/EP:CAT					
Name:PG					
Date:31. aug. 94					
APP.:VE					
ISSUE		REVISIONS		NAME	APPR.

RADIALL®

101. rue P. Hoffmann -Z.I Ouest-
93116 ROSNY/BOIS Cadex-FRANCE
Phone:33(1)49353535
Fax :33(1)48546363
Tlx RADIA 235220F

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)