



PAGE 1/2	ISSUE 02-02-18B	SERIES PHASE SHIFTER	PART NUMBER R499100000
----------	------------------------	-----------------------------	-------------------------------

SCALE 2 : 1

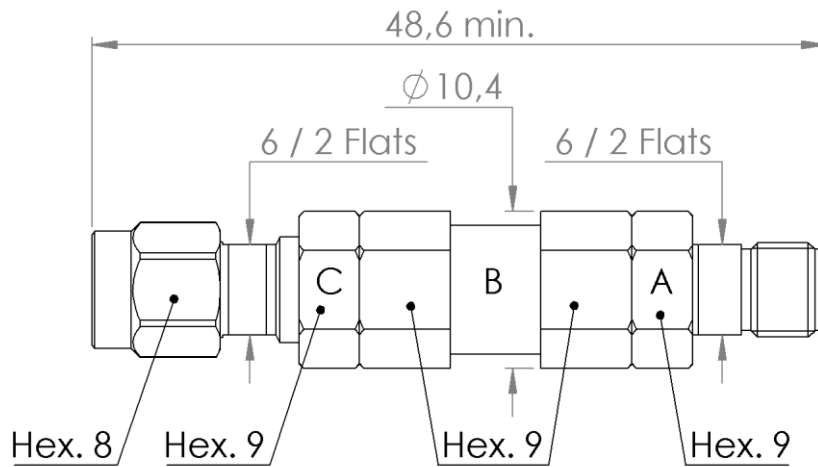


INSTRUCTION FOR USE :

- Free A from B
- Free C from B
- Adjust phase by rotating B
- Lock A to B without rotating B
- Lock C to B



All dimensions are in mm. Tolerances according ISO 2768 m-H



Weight **18,0000** g

PAGE 2/2	ISSUE 02-02-18B	SERIES PHASE SHIFTER	PART NUMBER R499100000
----------	------------------------	-----------------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Operating Frequency Range	DC - 18	GHz
Impedance	50	Ω
VSWR DC-18	1.05 + 0.014 x F (GHz)	
Insertion Loss	0.1 x SQR(F)	dB
Maximum Shift Range	10° x F (GHz)	°
Phase Shift Range per Rotation	0.6° x F (GHz)	°
Peak power at 25°C (1μs, 1%)	200	W
Average power at 25°C	40	W (Free Air Cooled)

MECHANICAL CHARACTERISTICS

Connectors	SMA	Male Female	MIL-C 39012
Max Length Variation	8,6	mm	

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-40/+85 °C
Storage temperature range	-55/+85 °C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5919-1503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [PN2C](#) [A0407000](#) [R114703000W](#) [R125771001](#) [R141710000W](#)
[R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161753000W](#) [R161791530W](#) [R201705000](#) [R222705200](#)
[R222M40010W](#) [R223703180](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#) [1996352-2](#) [2157155-1](#) [252169-75](#) [AD158](#)
[2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#) [R125771001W](#) [R127704001](#) [R127.870.001](#)
[R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#) [R143705700](#) [R161715000W](#) [R161771000W](#) [R176754000](#)