

ZLG SERIES

Load Life: 105°C 1000~5000hours. Ultra Low impedance.

◆FEATURES

- Extremely reduced impedance at high frequency range than ZL series.
- Load Life : 105°C 1000~5000 hours.
- RoHS compliance.



◆SPECIFICATIONS


Items	Characteristics																							
Category Temperature Range	−40~+105°C																							
Rated Voltage Range	6.3~35V.DC																							
Capacitance Tolerance	±20% (20°C, 120Hz)																							
Leakage Current(MAX)	$I=0.03CV$ or $3\mu A$ whichever is greater.(After 2 minutes) I =Leakage Current(μA) C =Capacitance(μF) V =Rated Voltage(V)																							
(tanδ) Dissipation Factor(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>$\tan\delta$</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </table> (20°C, 120Hz) When capacitance is over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF.						Rated Voltage (V)	6.3	10	16	25	35	$\tan\delta$	0.22	0.19	0.16	0.14	0.12						
Rated Voltage (V)	6.3	10	16	25	35																			
$\tan\delta$	0.22	0.19	0.16	0.14	0.12																			
Endurance	After life test with rated ripple current at conditions stated in the table below at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table> <table border="1"> <tr> <th>Case Size</th> <th>Life Time (hrs)</th> </tr> <tr> <td>L=7</td> <td>1000</td> </tr> <tr> <td>$\phi D \leq 6.3$</td> <td>2000</td> </tr> <tr> <td>L≥11</td> <td>3000</td> </tr> <tr> <td>$\phi D = 8$</td> <td>4000</td> </tr> <tr> <td>$\phi D \geq 12.5$</td> <td>5000</td> </tr> </table>						Capacitance Change	Within ±25% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	Case Size	Life Time (hrs)	L=7	1000	$\phi D \leq 6.3$	2000	L≥11	3000	$\phi D = 8$	4000	$\phi D \geq 12.5$	5000
Capacitance Change	Within ±25% of the initial value.																							
Dissipation Factor	Not more than 200% of the specified value.																							
Leakage Current	Not more than the specified value.																							
Case Size	Life Time (hrs)																							
L=7	1000																							
$\phi D \leq 6.3$	2000																							
L≥11	3000																							
$\phi D = 8$	4000																							
$\phi D \geq 12.5$	5000																							
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <td>$Z(-25^\circ C)/Z(20^\circ C)$</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>$Z(-40^\circ C)/Z(20^\circ C)$</td> <td>12</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> </tr> </table> (120Hz)						Rated Voltage (V)	6.3	10	16	25	35	$Z(-25^\circ C)/Z(20^\circ C)$	2	2	2	2	2	$Z(-40^\circ C)/Z(20^\circ C)$	12	12	10	8	6
Rated Voltage (V)	6.3	10	16	25	35																			
$Z(-25^\circ C)/Z(20^\circ C)$	2	2	2	2	2																			
$Z(-40^\circ C)/Z(20^\circ C)$	12	12	10	8	6																			

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient

	Frequency(Hz)	120	1k	10k	100k≤
Coefficient	4.7~10μF	0.24	0.53	0.80	1.00
	22~33μF	0.42	0.70	0.90	1.00
	47~270μF	0.50	0.73	0.92	1.00
	330~680μF	0.55	0.77	0.94	1.00
	820~1500μF	0.60	0.80	0.96	1.00
	2200~3900μF	0.70	0.85	0.98	1.00

◆DIMENSIONS (mm)

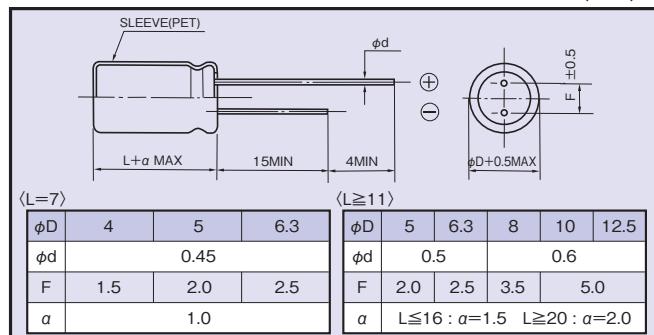

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

□□□ Rated Voltage — ZLG Series — □□□□□ Capacitance — M Capacitance Tolerance — □□□ Option — □□ Lead Forming — DXL Case Size

◆STANDARD SIZE

Rated Voltage (V·DC)	capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)		Rated Voltage (V·DC)	capacitance (μF)	Size φD×L(mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	Impedance (Ω MAX)		
				20°C, 100kHz	-10°C, 100kHz					20°C, 100kHz	-10°C, 100kHz	
6.3 (0J)	33	4×7	230	0.48	1.6	25 (1E)	10	4×7	230	0.52	1.7	
	47	5×7	350	0.26	0.86		22	5×7	350	0.27	0.89	
	100	6.3×7	480	0.15	0.5		33	6.3×7	480	0.16	0.53	
	150	5×11	405	0.15	0.5		47	6.3×7	480	0.15	0.5	
	330	6.3×11	760	0.065	0.19		47	5×11	405	0.15	0.5	
	560	8×11.5	1000	0.036	0.11		100	6.3×11	760	0.065	0.19	
	820	8×16	1250	0.028	0.083		220	8×11.5	1000	0.036	0.11	
	1000	10×12.5	1430	0.027	0.070		330	8×16	1250	0.028	0.083	
	1200	8×20	1600	0.020	0.056		330	10×12.5	1430	0.027	0.070	
	1200	10×16	1820	0.020	0.056		470	8×20	1600	0.020	0.056	
	1500	10×20	2180	0.014	0.033		470	10×16	1820	0.020	0.056	
	1500	12.5×16	2200	0.018	0.033		680	10×20	2180	0.014	0.033	
	2200	10×23	2360	0.013	0.030		680	12.5×16	2200	0.018	0.033	
	3300	12.5×20	2480	0.013	0.030		820	10×23	2360	0.013	0.030	
	3900	12.5×25	2900	0.012	0.024		1000	12.5×20	2480	0.013	0.030	
10 (1A)	22	4×7	230	0.49	1.6		1500	12.5×25	2900	0.012	0.024	
	33	5×7	350	0.26	0.86	35 (1V)	4.7	4×7	230	0.64	2.1	
	47	5×7	350	0.26	0.86		10	5×7	350	0.33	1.1	
	100	6.3×7	480	0.15	0.5		22	6.3×7	480	0.17	0.56	
	100	5×11	405	0.15	0.5		33	6.3×7	480	0.16	0.53	
	220	6.3×11	760	0.065	0.19		33	5×11	405	0.15	0.5	
	470	8×11.5	1000	0.036	0.11		56	6.3×11	760	0.065	0.19	
	680	8×16	1250	0.028	0.083		150	8×11.5	1000	0.036	0.11	
	680	10×12.5	1430	0.027	0.070		220	8×16	1250	0.028	0.083	
	1000	8×20	1600	0.020	0.056		220	10×12.5	1430	0.027	0.070	
	1000	10×16	1820	0.020	0.056		270	8×20	1600	0.020	0.056	
	1200	10×20	2180	0.014	0.033		330	10×16	1820	0.020	0.056	
	1200	12.5×16	2200	0.018	0.033		470	10×20	2180	0.014	0.033	
	1500	10×23	2360	0.013	0.030		470	12.5×16	2200	0.018	0.033	
	2200	12.5×20	2480	0.013	0.030		560	10×23	2360	0.013	0.030	
	3300	12.5×25	2900	0.012	0.024		680	12.5×20	2480	0.013	0.030	
16 (1C)	22	5×7	350	0.27	0.89		1000	12.5×25	2900	0.012	0.024	
	33	5×7	350	0.26	0.86							
	47	6.3×7	480	0.15	0.5							
	56	5×11	405	0.15	0.5							
	120	6.3×11	760	0.065	0.19							
	330	8×11.5	1000	0.036	0.11							
	470	8×16	1250	0.028	0.083							
	470	10×12.5	1430	0.027	0.070							
	680	8×20	1600	0.020	0.056							
	680	10×16	1820	0.020	0.056							
	1000	10×20	2180	0.014	0.033							
	1000	12.5×16	2200	0.018	0.033							
	1200	10×23	2360	0.013	0.030							
	1500	12.5×20	2480	0.013	0.030							
	2200	12.5×25	2900	0.012	0.024							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)