



# 5SDD 0105Z0401

## Housingless Welding Diode

### Properties

- High forward current capability
- Low forward and reverse recovery losses

### Applications

- Welding equipment
- High current application up to 2000 Hz

### Key Parameters

$V_{RRM}$	=	400	V
$I_{FAVm}$	=	10 502	A
$I_{FSM}$	=	70 000	A
$V_{TO}$	=	0.812	V
$r_T$	=	0.026	mΩ

### Types

	$V_{RRM}$
<b>5SDD 0105Z0401</b>	<b>400 V</b>
Conditions:	$T_j = -40 \div 180 \text{ }^\circ\text{C}$ , half sine waveform, $f = 50 \text{ Hz}$

### Mechanical Data

$F_m$	Mounting force	30 ÷ 50 kN
$m$	Weight	0.11 kg
$D_s$	Surface creepage distance	2 mm
$D_a$	Air strike distance	2 mm

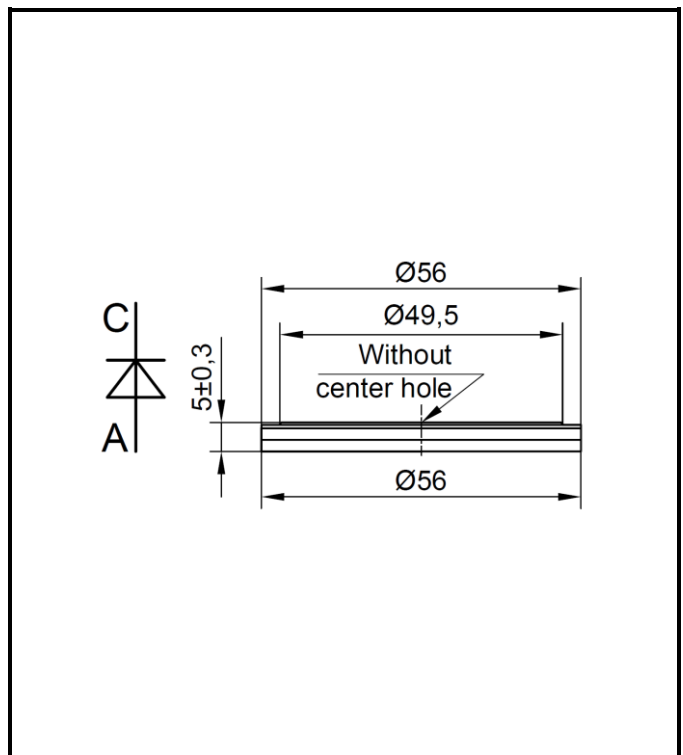


Fig. 1 Case



ABB s.r.o.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 250, <http://www.abb.com/semiconductors>


<b>Maximum Ratings</b>			<b>Maximum Limits</b>	<b>Unit</b>
$V_{RRM}$	<b>Repetitive peak reverse voltage</b> $T_j = -40 \div 180 \text{ }^\circ\text{C}$		<b>400</b>	<b>V</b>
$I_{FAVM}$	<b>Average forward current</b>	$T_c = 85 \text{ }^\circ\text{C}$	<b>10 502</b>	<b>A</b>
		$T_c = 110 \text{ }^\circ\text{C}$	<b>8 478</b>	
$I_{FRMS}$	<b>RMS forward current</b>	$T_c = 85 \text{ }^\circ\text{C}$	<b>16 496</b>	<b>A</b>
		$T_c = 110 \text{ }^\circ\text{C}$	<b>13 317</b>	
$I_{RRM}$	<b>Repetitive reverse current</b> $V_R = V_{RRM}$		<b>75</b>	<b>mA</b>
$I_{FSM}$	<b>Non repetitive peak surge current</b> $V_R = 0 \text{ V}$ , half sine pulse	$t_p = 8.3 \text{ ms}$	<b>74 700</b>	<b>A</b>
		$t_p = 10 \text{ ms}$	<b>70 000</b>	
$I^2t$	<b>Limiting load integral</b> $V_R = 0 \text{ V}$ , half sine pulse	$t_p = 8.3 \text{ ms}$	<b>23 205 000</b>	<b>A<sup>2</sup>s</b>
		$t_p = 10 \text{ ms}$	<b>24 500 000</b>	
$T_{jmin} - T_{jmax}$	<b>Operating temperature range</b>		<b>- 40 <math>\div</math> 180</b>	<b><math>^\circ\text{C}</math></b>
$T_{stgmin} - T_{stgmax}$	<b>Storage temperature range</b>		<b>- 40 <math>\div</math> 180</b>	

Unless otherwise specified  $T_j = 180 \text{ }^\circ\text{C}$

<b>Characteristics</b>			<b>Value</b>			<b>Unit</b>
			<i>min</i>	<i>typ</i>	<i>max</i>	
$V_{T0}$	<b>Threshold voltage</b>				<b>0.812</b>	<b>V</b>
$r_T$	<b>Forward slope resistance</b> $I_{F1} = 10\,000 \text{ A}$ , $I_{F2} = 30\,000 \text{ A}$				<b>0.026</b>	<b>m<math>\Omega</math></b>
$V_{FM}$	<b>Maximum forward voltage</b>	$I_{FM} = 8\,000 \text{ A}$			<b>1.010</b>	<b>V</b>
		$I_{FM} = 10\,000 \text{ A}$			<b>1.070</b>	
$Q_{rr}$	<b>Recovered charge</b> $I_{FM} = 1\,000 \text{ A}$ , $di/dt = -30 \text{ A}/\mu\text{s}$ , $V_R = 100 \text{ V}$			<b>300</b>	<b>350</b>	<b><math>\mu\text{C}</math></b>

Unless otherwise specified  $T_j = 180 \text{ }^\circ\text{C}$

<b>Thermal Parameters</b>			<b>Value</b>	<b>Unit</b>
$R_{thjc}$	Thermal resistance junction to case	double side cooling	5.0	K/kW
		anode side cooling	6.6	
		cathode side cooling	20.3	
$R_{thch}$	Thermal resistance case to heatsink	double side cooling	2.5	K/kW
		anode side cooling	4.5	
		cathode side cooling	5.7	

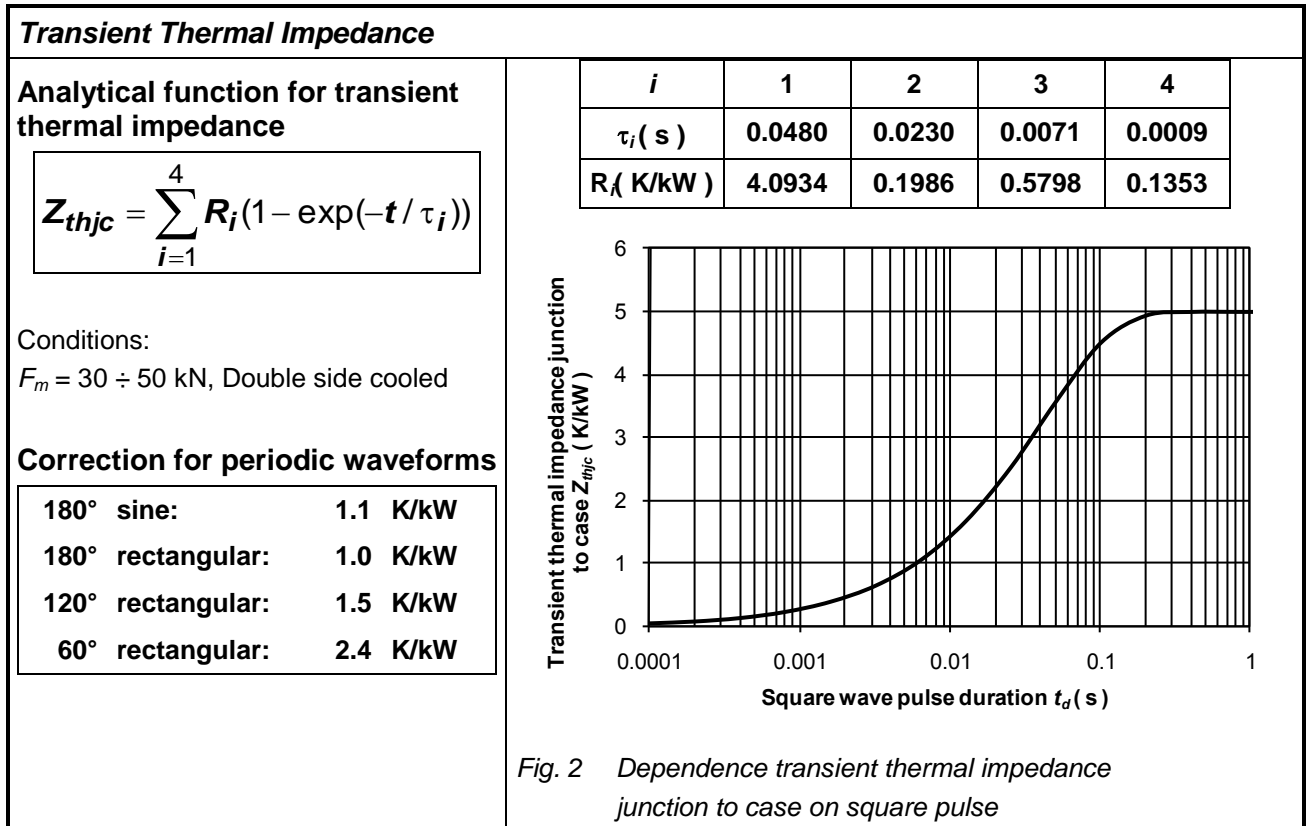

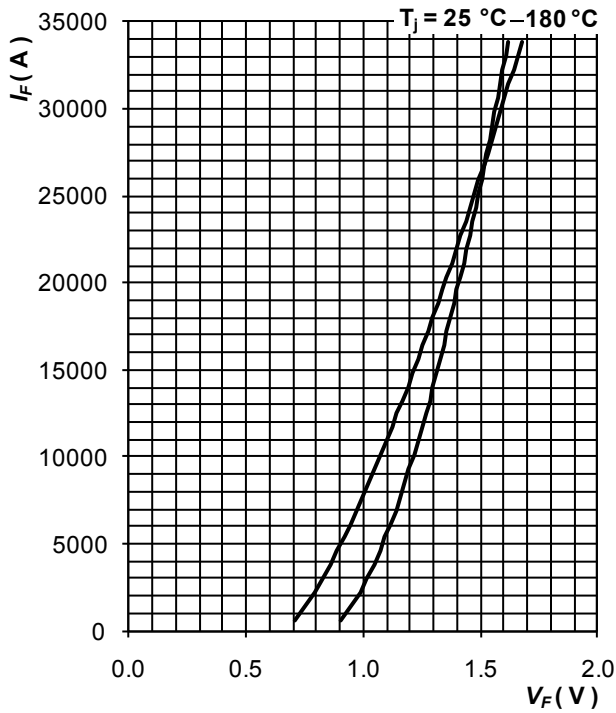


Fig. 3 Maximum forward voltage drop characteristics

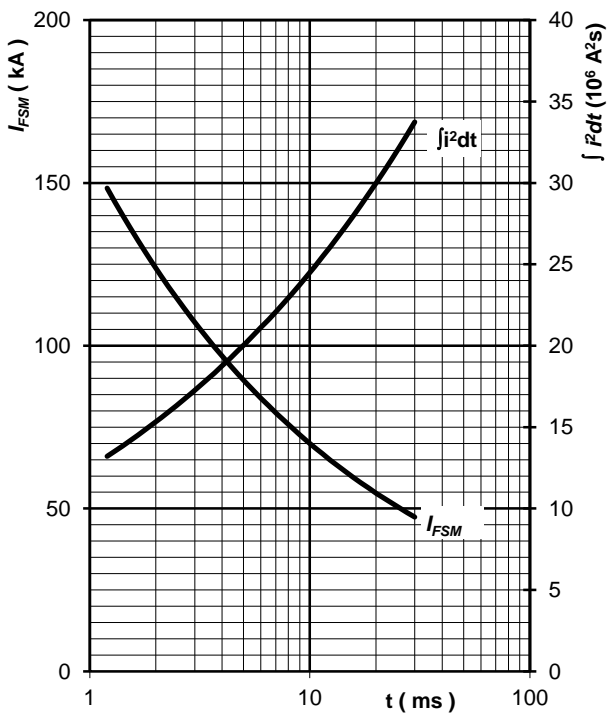


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,  $V_R = 0 \text{ V}$ ,  $T_j = T_{jmax}$

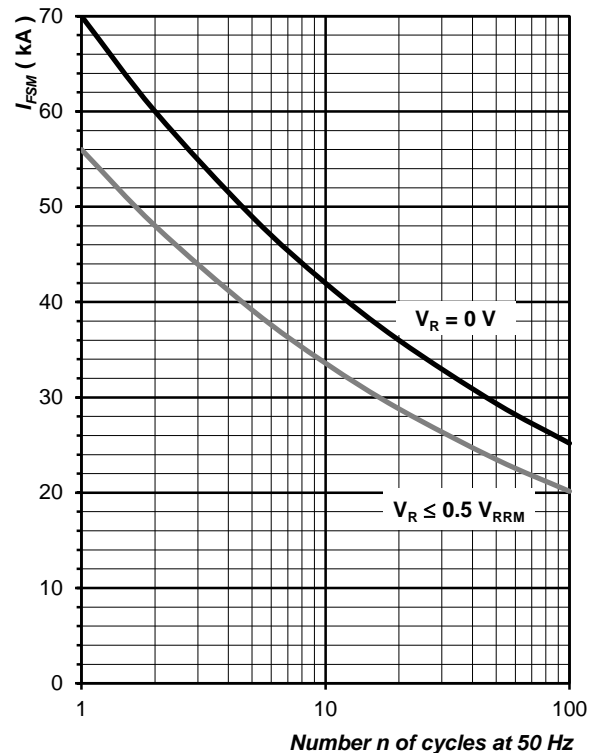


Fig. 5 Surge forward current vs. number of pulses, half sine wave,  $T_j = T_{jmax}$

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

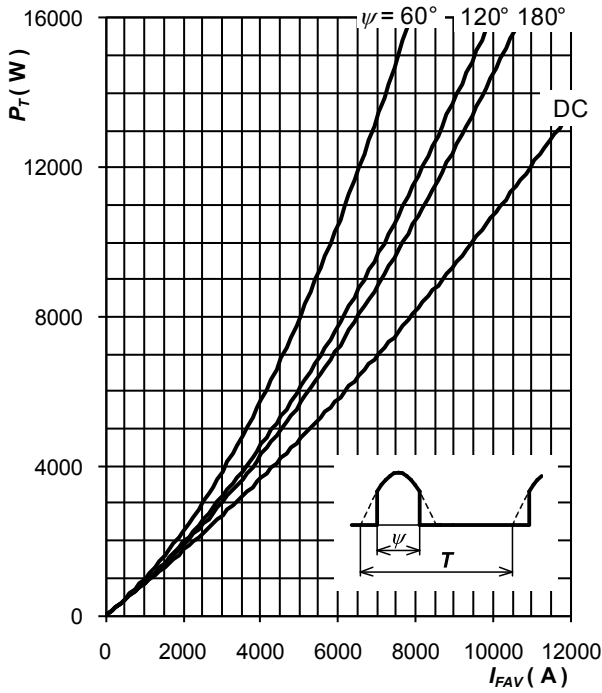


Fig. 6 Forward power loss vs. average forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

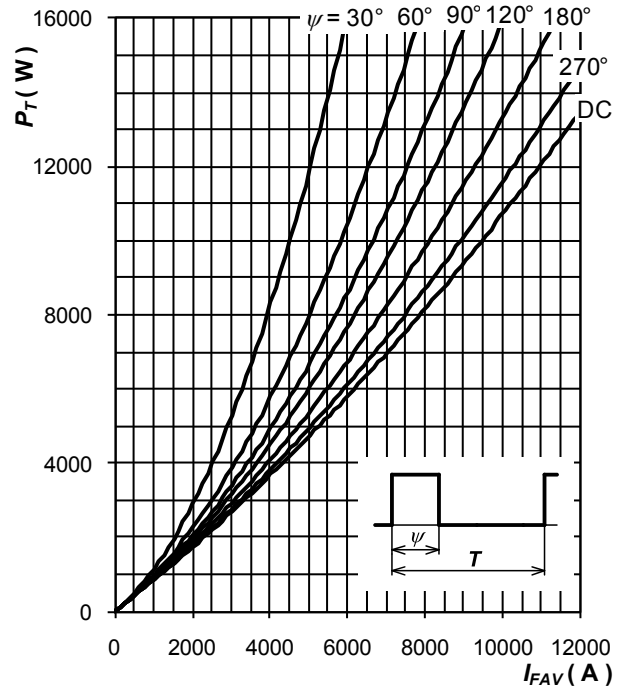


Fig. 7 Forward power loss vs. average forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

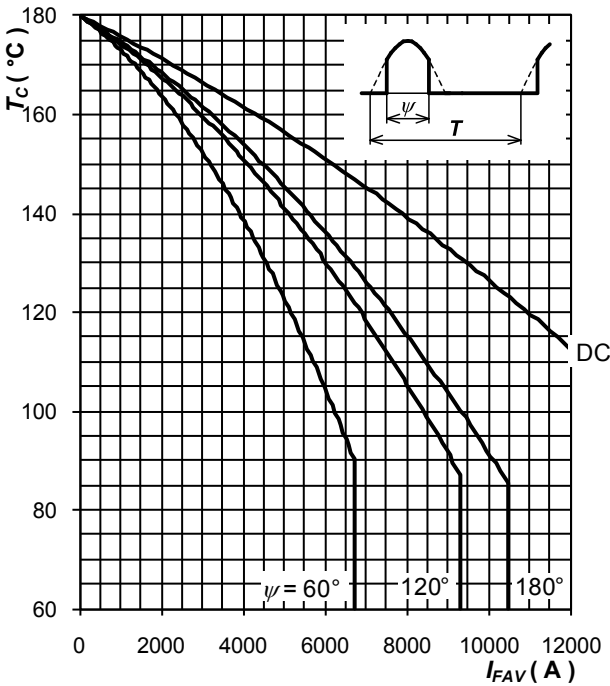


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

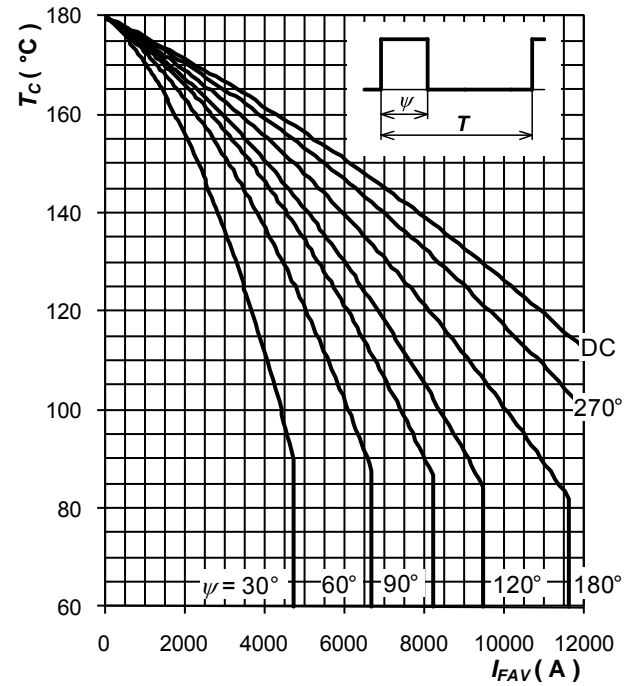


Fig. 9 Max. case temperature vs. aver. forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

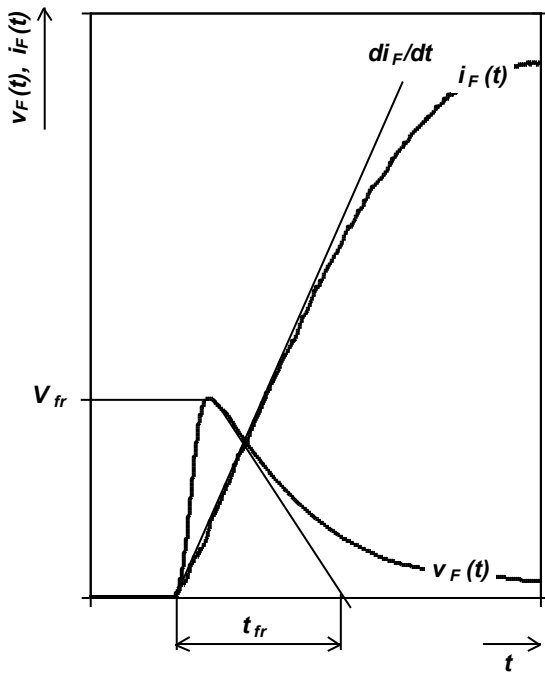


Fig. 10 Typical forward recovery voltage waveform when the diode is turned on with high  $di_F/dt$

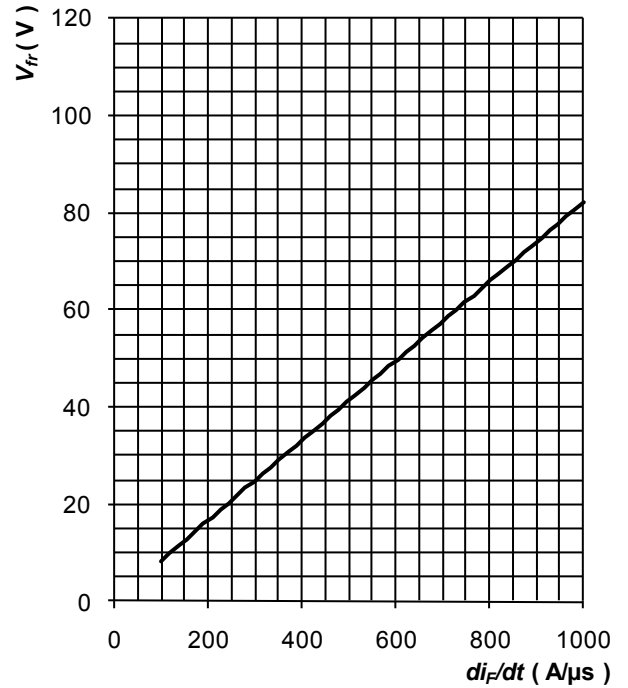


Fig. 11 Max. forward recovery voltage vs. rate of rise forward current, trapezoid pulse,  $T_j = T_{jmax}$ ,  $t_{fr} \leq 10 \mu s$

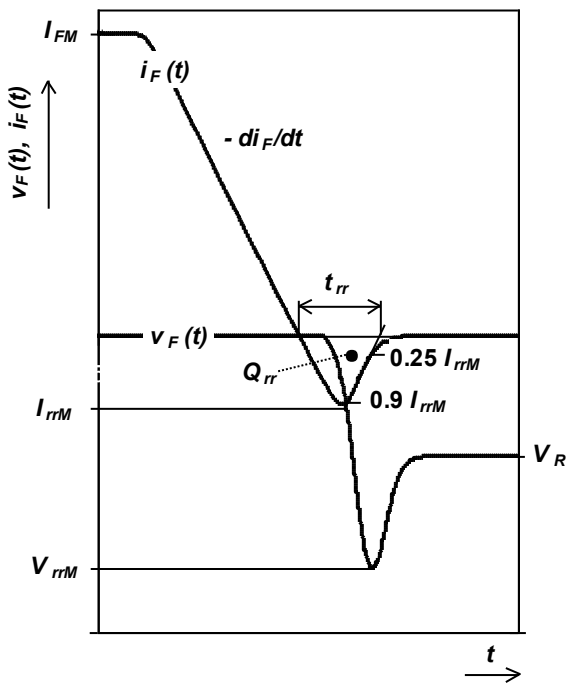


Fig. 12 Definition of reverse recovery parameters

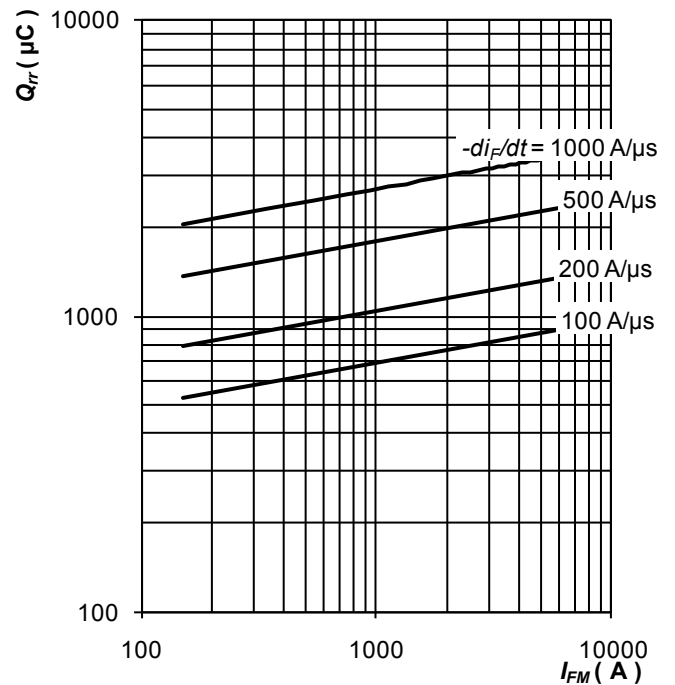


Fig. 13 Max. recovered charge vs. forward current, trapezoid pulse,  $T_j = T_{jmax}$

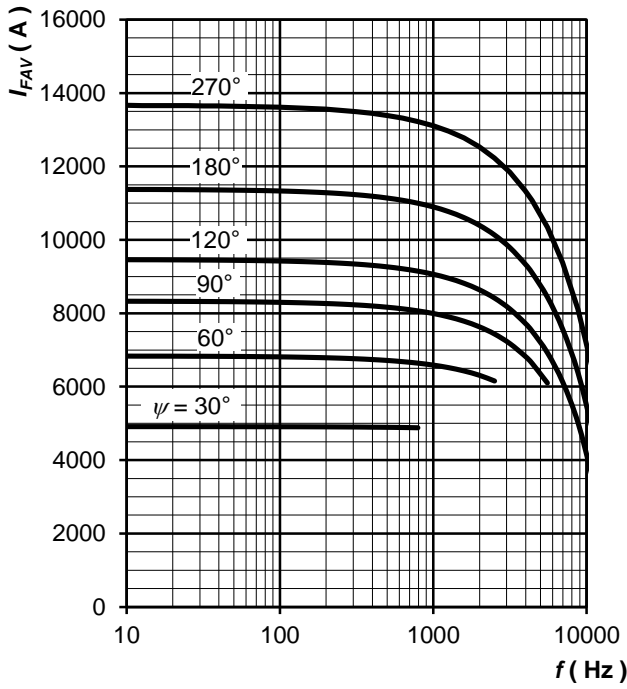


Fig. 14 Average forward current vs. frequency, trapezoid waveform,  $T_C = 85^\circ\text{C}$ ,  $di_f/dt = \pm 1\,000\text{ A}/\mu\text{s}$ ,  $V_R = 100\text{ V}$

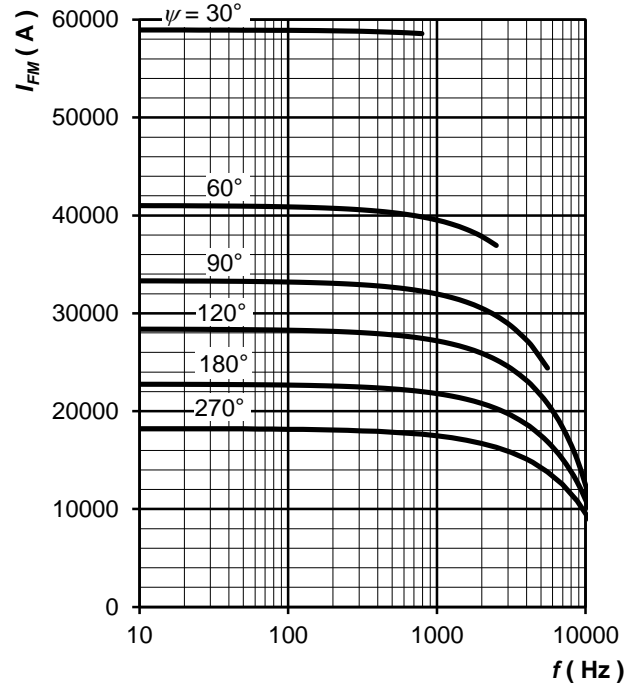


Fig. 15 Maximum forward current vs. frequency, trapezoid waveform,  $T_C = 85^\circ\text{C}$ ,  $di_f/dt = \pm 1\,000\text{ A}/\mu\text{s}$ ,  $V_R = 100\text{ V}$

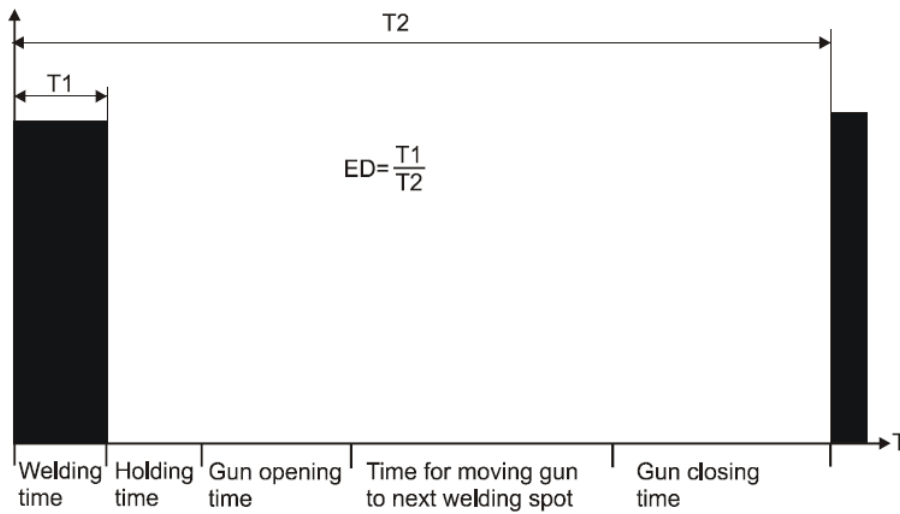


Fig. 16 Definition of ED for typical welding sequence

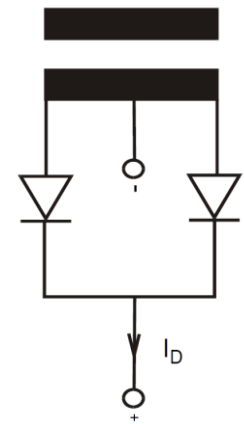


Fig. 17 Definition of  $I_D$  for single-phase centre tap

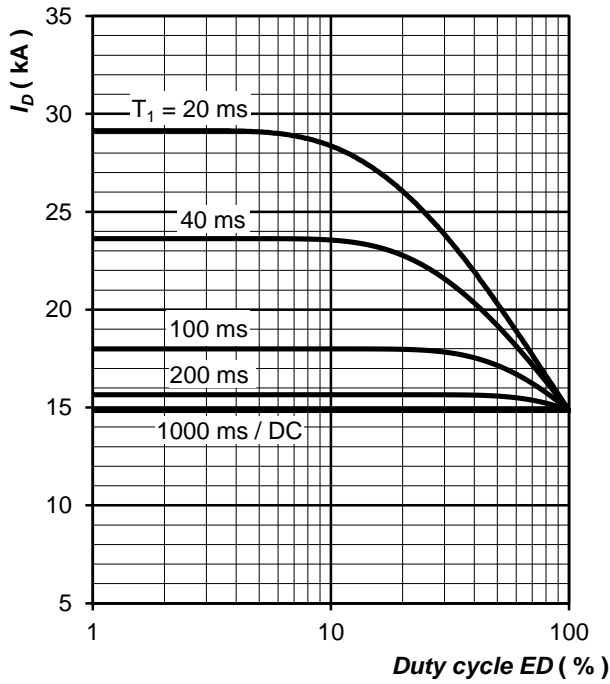


Fig. 18 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000 \text{ Hz}$ , square wave,  $\Delta T_j = 80 \text{ }^\circ\text{C}$

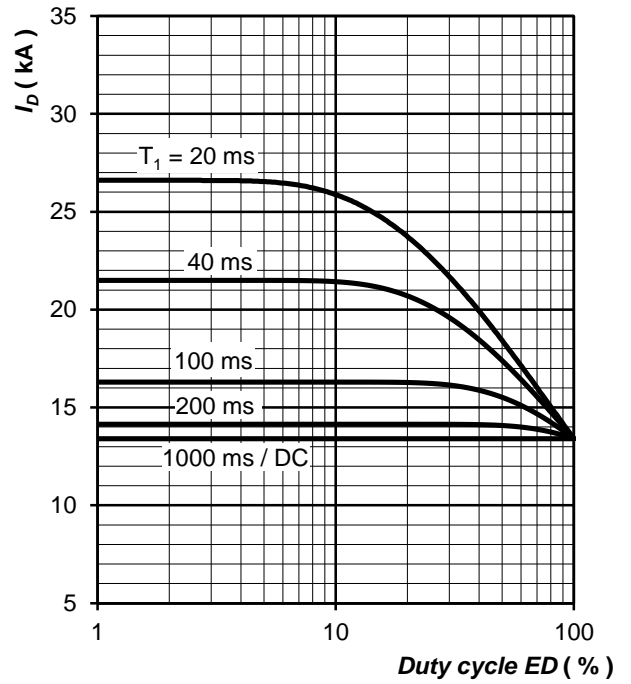


Fig. 19 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000 \text{ Hz}$ , square wave,  $\Delta T_j = 70 \text{ }^\circ\text{C}$

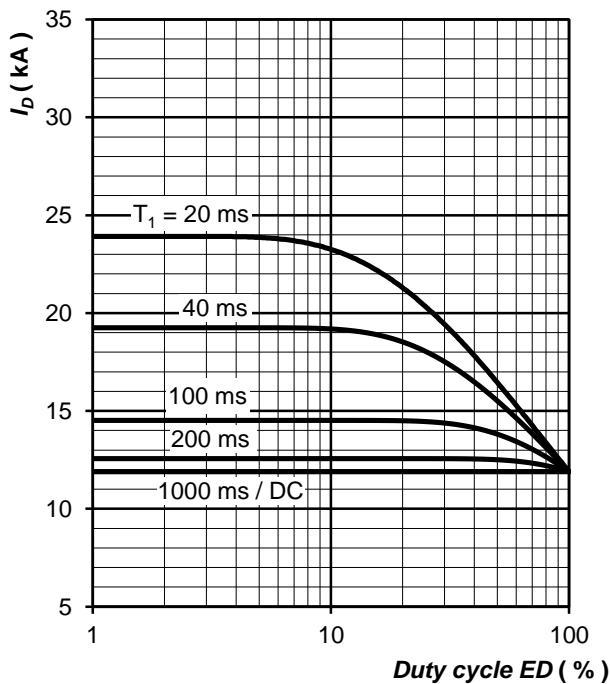


Fig. 20 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000 \text{ Hz}$ , square wave,  $\Delta T_j = 60 \text{ }^\circ\text{C}$

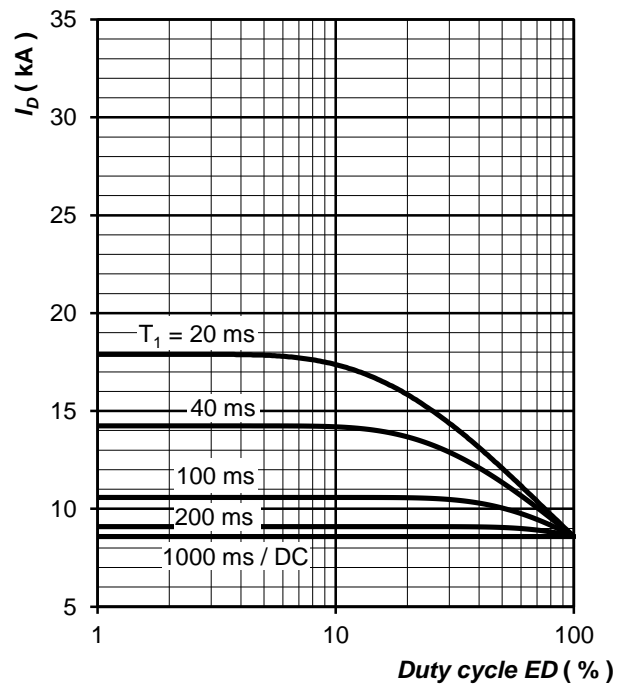


Fig. 21 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000 \text{ Hz}$ , square wave,  $\Delta T_j = 40 \text{ }^\circ\text{C}$

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic



Notes:

ABB s.r.o., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):*

*Click to view products by [ABB manufacturer](#):*

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RGP30G-E373](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [1N4449](#) [1N4934-E3/73](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [BAW76-TR](#) [MM230L-CAA](#) [MMSD914-TP](#) [IDW40E65D1](#)