


## Product information

### ASBS 2 M12-5

Industrial Connecting Solutions:Cables and Adapters:T-connectors / adaptors:M8, M12, valve plug - T-connectors/adaptors:M12-M12:T-connector, M12 male connector on two M12 female connectors:ASBS 2 M12-5

<https://e-catalog.hirschmann.com:443/link/57078-24228-256254-57229-218892-219241-219304-219343/en/conf/uistate>


<b>Name</b>	<b>ASBS 2 M12-5</b>
	
	T-connector, M12 male connector with two M12 female connectors, 5 poles, with self locking threaded
<b>Delivery informations</b>	
<b>Availability</b>	available
<b>Product description</b>	
<b>Type</b>	ASBS 2 M12-5
<b>Order No.</b>	11120
<b>Description</b>	T-connector, M12 male connector with two M12 female connectors, 5 poles, with self locking threaded
<b>Number of contacts</b>	5
<b>Color of housing</b>	orange
<b>Product characteristics</b>	Vibration resistance, Oil resistance
<b>Classification</b>	
<b>Belden brand</b>	Lumberg-Automation
<b>Environmental conditions</b>	
<b>Environmental temperature</b>	-25 °C ... 90 °C
<b>Degree of protection (IP), mounted</b>	IP67
<b>Pollution degree</b>	3
<b>Materials</b>	
<b>Housing material / Molded body</b>	TPU, self-extinguishing
<b>Contact bearer material</b>	TPU, self-extinguishing
<b>Contact bearer material, side 2</b>	PA-GF, self-extinguishing
<b>Contact material</b>	CuZn
<b>Contact material - Surface refinement</b>	pre-nickel- and 0.8 microns gold-plated
<b>Knurled screw / nut material</b>	CuZn, nickel-plated
<b>Sealing material</b>	FKM
<b>Electrical data</b>	
<b>Contact resistance</b>	≤ 5 mΩ
<b>Rated current In</b>	4 A per outlet / 4 A max. at 40 °C
<b>Nominal voltage</b>	60 V
<b>Rated voltage</b>	63 V
<b>Test voltage</b>	1.5 kV eff./60 s
<b>Insulation resistance</b>	> 1 GΩ

Industrial Connecting Solutions:Cables and Adapters:T-connectors / adaptors:M8, M12, valve plug - T-connectors/adaptors:M12-M12:T-connector, M12 male connector on two M12 female connectors:ASBS 2 M12-5

<https://e-catalog.hirschmann.com:443/link/57078-24228-256254-57229-218892-219241-219304-219343/en/conf/ui/state>

Picture

Drawing

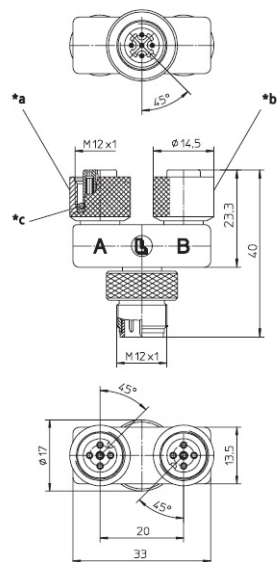

- \*a Mutter schwarz  
coupling nut black
- \*b Mutter vernickelt  
coupling nut nickel-plated

**Belden Deutschland GmbH**

Im Gewerbepark 2  
58579 Schalksmühle  
Germany  
Phone: +49 7127/14-1806  
E-Mail: [icos-sales@belden.com](mailto:icos-sales@belden.com)

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [lumberg](#) manufacturer:*

Other Similar products are found below :

[RK20-603/5M](#) [ASBSM 10/LED 3](#) [ASBS-R 8/LED 5-4](#) [ASBSV 8 5](#) [BTO 1 V ROT](#) [BTOR 1 SCHWARZ](#) [18315 0976 PMC 151](#) [KRE8](#) [SBS](#)  
[4/LED 3](#) [SFV 80](#) [RK30/2M](#) [RKWT 4-07/5M](#) [ASBS-R 4 5-4](#) [ASBS-R 4/LED 5-4](#) [BTO 1 ROT](#) [BTO 1 SCHWARZ](#) [BTO 1 V SCHWARZ](#)  
[BTOR 1 GELB](#) [BTOR 1 WEISS](#) [KB3](#) [KRES10](#) [KRESS8](#) [KS8](#) [KRM 07](#) [2480 01](#) [0103 03](#) [WKV 81](#) [RK 30-738/20F](#) [RKMV 4-225/10 M](#)  
[RKT 5-644/2M](#) [RKT 4-679/5M](#) [HZ30](#) [ASBS 2 M12-S2326](#) [1614 16](#) [0985 706 100/10M](#) [RST 4-RKWT 4-602/1M](#) [WKV50](#) [RST 4-633/2M](#)  
[RST 4-RKWT 4-602/3M](#) [RS-TU](#) [WSV 30](#) [0986 EMC 102](#) [0250 03](#) [RKWT 5-612/5M](#) [0980 ESL 393-121](#) [RST 5L-RKT 5L-949/5 M](#) [ASBM](#)  
[6/LED 3-344/5 M](#) [RKT 4-646/2M](#) [RKHL 8/S 5,5](#) [0985 YM57530 100/20M](#)