

Recommended Application:

Poulsbo Based Ultra-Mobile PC (UMPC) - CK610


Output Features:

- 3 - CPU low power differential push-pull pairss
- 3 - SRC low power differential push-pull pairs
- 1 - LCD100 SSCD low power differential push-pull pair
- 1 - DOT96 low power differential push-pull pair
- 1 - REF, 14.31818MHz, 3.3V SE output

Features/Benefits:

- Supports Dothan ULV CPUs with 100 to 200 MHz CPU outputs
- Dedicated TEST/SEL and TEST/MODE pins saves isolation resistors on pins
- CPU STOP# input for power managment
- Fully integrated Vreg
- Integrated series resistors on differential outputs
- 1.5V VDD IO, 1.5V VDD core, 3.3V VDD supply pin for REF

Pin Configuration

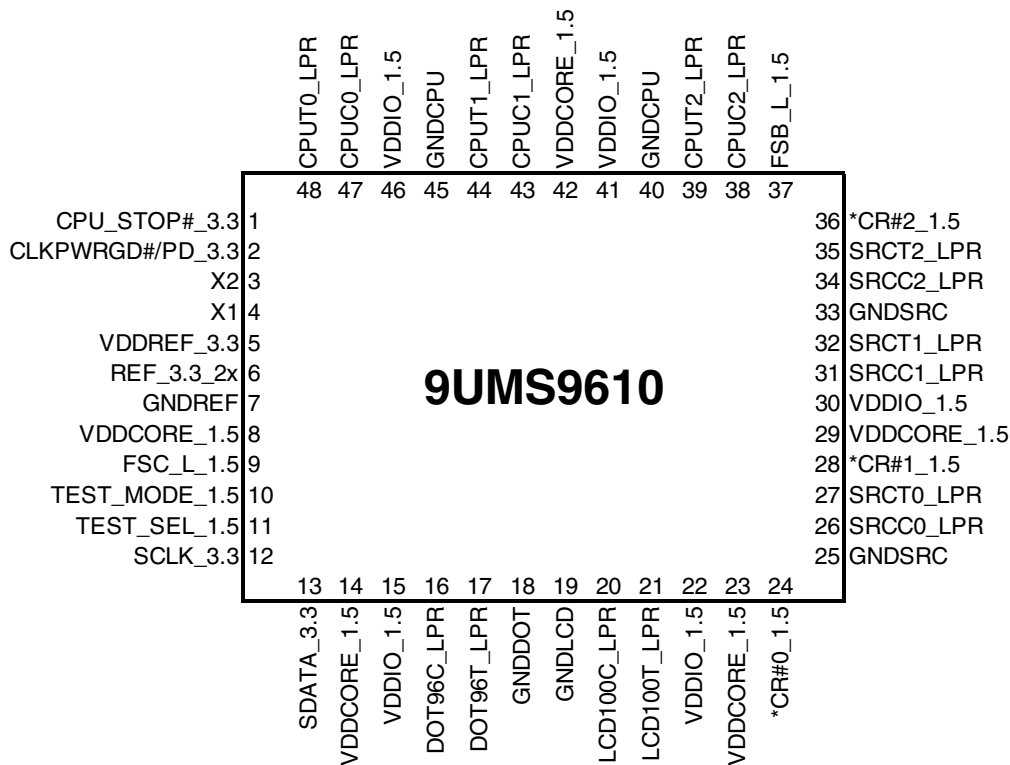

48-pin MLF, 6x6 mm, 0.4mm pitch

* indicates inputs with internal pull up of ~10Kohm to 1.5V


Pin Description

| PIN # | PIN NAME | TYPE | DESCRIPTION | Logic Level (V) | Input Level Tolerance (V) |
|-------|------------------|------|---|-----------------|---------------------------|
| 1 | CPU_STOP#_3.3 | IN | This active-low input stops all CPU clocks that are set to be stoppable. | 3.3 | 3.3 |
| 2 | CLKPWRGD#/PD_3.3 | IN | This level sensitive strobe determines when latch inputs are valid and are ready to be sampled. When high, this asynchronous input places the device into the power down state. | 3.3 | 3.3 |
| 3 | X2 | OUT | Crystal output, Nominally 14.318MHz | N/A | N/A |
| 4 | X1 | IN | Crystal input, Nominally 14.318MHz. | 1.5 | 1.5 |
| 5 | VDDREF_3.3 | PWR | Power pin for the XTAL and REF clocks, nominal 3.3V | 3.3 | 3.3 |
| 6 | REF_3.3_2x | OUT | 3.3V 14.318 MHz reference clock. Default 2 load drive strength | 3.3 | N/A |
| 7 | GNDREF | GND | Ground pin for the REF outputs. | 0 | N/A |
| 8 | VDDCORE_1.5 | PWR | 1.5V power for the PLL core | 1.5 | 1.5 |
| 9 | FSC_L_1.5 | IN | Low threshold input for CPU frequency selection. Refer to input electrical characteristics for Vil_FS and Vih_FS values. 1.5V Max input voltage. | 1.5 | 1.5 |
| 10 | TEST_MODE_1.5 | IN | TEST_MODE is a real time input to select between Hi-Z and REF/N divider mode while in test mode. Refer to Test Clarification Table. Max input voltage is 1.5V. | 1.5 | 3.3 |
| 11 | TEST_SEL_1.5 | IN | TEST_SEL: latched input to select TEST MODE. Max input voltage is 1.5V 1 = All outputs are tri-stated for test 0 = All outputs behave normally. | 1.5 | 3.3 |
| 12 | SCLK_3.3 | IN | Clock pin of SMBus circuitry, 3.3V tolerant. | 3.3 | 3.3 |
| 13 | SDATA_3.3 | I/O | Data pin for SMBus circuitry, 3.3V tolerant. | 3.3 | 3.3 |
| 14 | VDDCORE_1.5 | PWR | 1.5V power for the PLL core | 1.5 | 1.5 |
| 15 | VDDIO_1.5 | PWR | Power supply for low power differential outputs, nominal 1.5V. | 1.5 | 1.5 |
| 16 | DOT96C_LPR | OUT | Complement clock of low power differential pair for 96.00MHz DOT clock. No 50ohm resistor to GND needed. No Rs needed. | 0.8 | N/A |
| 17 | DOT96T_LPR | OUT | True clock of low power differential pair for 96.00MHz DOT clock. No 50ohm resistor to GND needed. No Rs needed. | 0.8 | N/A |
| 18 | GNDDOT | GND | Ground pin for DOT clock output | 0 | N/A |
| 19 | GNDLCD | GND | Ground pin for LCD clock output | 0 | N/A |
| 20 | LCD100C_LPR | OUT | Complement clock of low power differential pair for LCD100 SS clock. No 50ohm resistor to GND needed. No Rs needed. | 0.8 | N/A |
| 21 | LCD100T_LPR | OUT | True clock of low power differential pair for LCD100 SS clock. No 50ohm resistor to GND needed. No Rs needed. | 0.8 | N/A |
| 22 | VDDIO_1.5 | PWR | Power supply for low power differential outputs, nominal 1.5V. | 1.5 | 1.5 |
| 23 | VDDCORE_1.5 | PWR | 1.5V power for the PLL core | 1.5 | 1.5 |
| 24 | *CR#0_1.5 | IN | 1.5V Clock request for SRC0, 0 = enable, 1 = disable | 1.5 | 1.5 |

Pin Description (continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION | Logic Level (V) | Input Level Tolerance (V) |
|-------|-------------|------|--|-----------------|---------------------------|
| 25 | GNDSRC | GND | Ground pin for the SRC outputs | 0 | N/A |
| 26 | SRCC0_LPR | OUT | Complementary clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 27 | SRCT0_LPR | OUT | True clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 28 | *CR#1_1.5 | IN | 1.5V Clock request for SRC1, 0 = enable, 1 = disable | 1.5 | 1.5 |
| 29 | VDDCORE_1.5 | PWR | 1.5V power for the PLL core | 1.5 | 1.5 |
| 30 | VDDIO_1.5 | PWR | Power supply for low power differential outputs, nominal 1.5V. | 1.5 | 1.5 |
| 31 | SRCC1_LPR | OUT | Complementary clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 32 | SRCT1_LPR | OUT | True clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 33 | GNDSRC | GND | Ground pin for the SRC outputs | 0 | N/A |
| 34 | SRCC2_LPR | OUT | Complementary clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 35 | SRCT2_LPR | OUT | True clock of differential 0.8V push-pull SRC output with integrated 33ohm series resistor. No 50ohm resistor to GND needed. | 0.8 | N/A |
| 36 | *CR#2_1.5 | IN | 1.5V Clock request for SRC2, 0 = enable, 1 = disable | 1.5 | 1.5 |
| 37 | FSB_L_1.5 | IN | Low threshold input for CPU frequency selection. Refer to input electrical characteristics for V_{il_FS} and V_{ih_FS} values. 1.5V Max input voltage. | 1.5 | 1.5 |
| 38 | CPUC2_LPR | OUT | Complementary clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |
| 39 | CPUT2_LPR | OUT | True clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |
| 40 | GNDCPU | GND | Ground pin for the CPU outputs | 0 | N/A |
| 41 | VDDIO_1.5 | PWR | Power supply for low power differential outputs, nominal 1.5V. | 1.5 | 1.5 |
| 42 | VDDCORE_1.5 | PWR | 1.5V power for the PLL core | 1.5 | 1.5 |
| 43 | CPUC1_LPR | OUT | Complementary clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |
| 44 | CPUT1_LPR | OUT | True clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |
| 45 | GNDCPU | GND | Ground pin for the CPU outputs | 0 | N/A |
| 46 | VDDIO_1.5 | PWR | Power supply for low power differential outputs, nominal 1.5V. | 1.5 | 1.5 |
| 47 | CPUC0_LPR | OUT | Complementary clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |
| 48 | CPUT0_LPR | OUT | True clock of differential pair 0.8V push-pull CPU outputs with integrated 33ohm series resistor. No 50 ohm resistor to GND needed. | 0.8 | N/A |

Functional Block Diagram

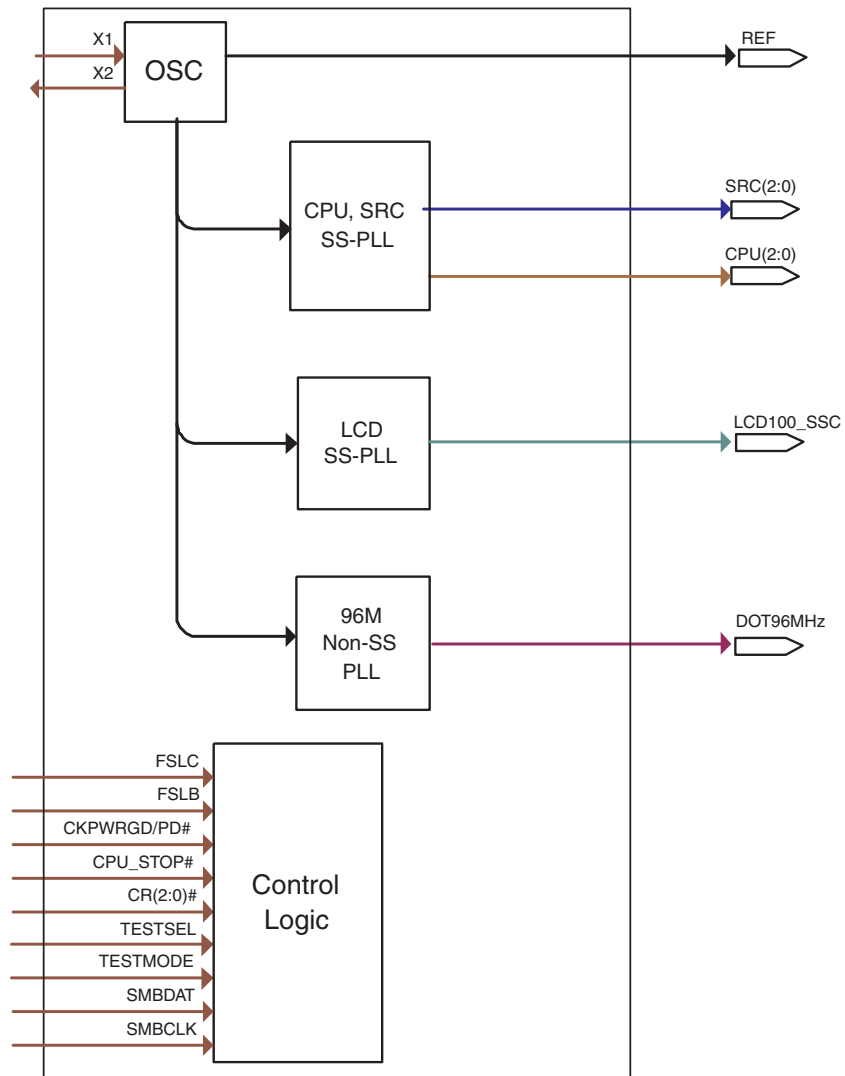

Power Groups

| Pin Number | | Description | |
|------------|--------|-------------|-------------------|
| VDD | GND | | |
| 41, 46 | 40, 45 | CPUCLK | Low power outputs |
| 42 | | | VDDCORE_1.5V |
| 30 | 25, 33 | SRCCLK | Low power outputs |
| 29 | | | VDDCORE_1.5V |
| 22 | 19 | LCDCLK | Low power outputs |
| 23 | | | VDDCORE_1.5V |
| 15 | 18 | DOT 96Mhz | Low power outputs |
| 14 | | | VDDCORE_1.5V |
| 5 | 7 | Xtal, REF | |

Absolute Maximum Ratings

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|------------------------|--------------------|------------------|-----------|--------------|-------|-------|
| 3.3V Supply Voltage | VDDxxx_3.3 | Supply Voltage | | 3.9 | V | 1,2 |
| 1.5V Supply Voltage | VDDxxx_1.5 | Supply Voltage | | 2.1 | V | 1,2 |
| 3.3_Input High Voltage | V _{IH3.3} | 3.3V Inputs | | VDD_3.3+0.3V | V | 1,2,3 |
| 1.5_Input High Voltage | V _{IH1.5} | 1.5V Inputs | | VDD_1.5+0.3V | V | 1,2,3 |
| Minimum Input Voltage | V _{IL} | Any Input | GND - 0.5 | | V | 1 |
| Storage Temperature | T _s | - | -65 | 150 | °C | 1,2 |
| Input ESD protection | ESD prot | Human Body Model | 2000 | | V | 1,2 |

Notes:

- ¹Guaranteed by design and characterization, not 100% tested in production.
²Operation under these conditions is neither implied, nor guaranteed.
³Maximum input voltage is not to exceed maximum VDD

Electrical Characteristics - Input/Supply/Common Output Parameters

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|--------------------------------------|----------------------------|--|-----------------------|----------------------------|-------|-------|
| Ambient Operating Temp | T _{ambient} | No Airflow | 0 | 85 | °C | 1 |
| 3.3V Supply Voltage | VDDxxx_3.3 | 3.3V +/- 5% | 3.135 | 3.465 | V | 1 |
| 1.5V Supply Voltage | VDDxxx_1.5 | 1.5V +/- 5% | 1.425 | 1.575 | V | 1 |
| 3.3V Input High Voltage | V _{IHSE3.3} | Single-ended inputs | 2 | V _{DDxx_3.3} +0.3 | V | 1 |
| 3.3V Input Low Voltage | V _{ILSE3.3} | Single-ended inputs | V _{SS} - 0.3 | 0.8 | V | 1 |
| 1.5V Input High Voltage | V _{IHSE1.5} | Single-ended inputs | 1.2 | V _{DDxx_1.5} +0.3 | V | 1 |
| 1.5V Input Low Voltage | V _{ILSE1.5} | Single-ended inputs | V _{SS} - 0.3 | 0.3 | V | 1 |
| Input Leakage Current | I _{IN} | V _{IN} = V _{DD} , V _{IN} = GND | -5 | 5 | uA | 1 |
| Input Leakage Current | I _{INRES} | Inputs with pull or pull down resistors V _{IN} = V _{DD} , V _{IN} = GND | -200 | 200 | uA | 1 |
| Output High Voltage | V _{OHSSE} | Single-ended output, I _{OH} = -1mA | 2.4 | | V | 1 |
| Output Low Voltage | V _{OLSSE} | Single-ended output, I _{OL} = 1 mA | | 0.4 | V | 1 |
| Low Threshold Input-High Voltage | V _{IH_FS} | 1.5 V +/-5% | 0.7 | 1.5 | V | 1 |
| Low Threshold Input-Low Voltage | V _{IL_FS} | 1.5 V +/-5% | V _{SS} - 0.3 | 0.35 | V | 1 |
| Operating Supply Current | I _{DD_3.3} | 3.3V supply | | 10 | mA | 1 |
| | I _{DD_DEFAULT1.5} | 1.5V core supply, LCDPLL off | | 45 | mA | 1 |
| | I _{DD_LCDEN1.5} | 1.5V core supply, LCDPLL enabled | | 55 | mA | 1 |
| | I _{DD_IO1.5} | 1.5V supply, Differential IO current, all outputs enabled | | 15 | mA | 1 |
| Power Down Current | I _{DD_PD3.3} | 3.3V supply, Power Down Mode | | 0.5 | mA | 1 |
| | I _{DD_PD1.5CORE} | 1.5V CORE supply, Power Down Mode | | 0.5 | mA | 1 |
| | I _{DD_PD1.5IO} | 1.5V IO supply, Power Down Mode | | 0.1 | mA | 1 |
| Input Frequency | F _i | V _{DD} = 3.3 V | | 15 | MHz | 2 |
| Pin Inductance | L _{pin} | | | 7 | nH | 1 |
| Input Capacitance | C _{IN} | Logic Inputs | 1.5 | 5 | pF | 1 |
| | C _{OUT} | Output pin capacitance | | 6 | pF | 1 |
| | C _{INX} | X1 & X2 pins | 3 | 5 | pF | 1 |
| Spread Spectrum Modulation Frequency | f _{SSMOD} | Triangular Modulation | 30 | 33 | kHz | 1 |

AC Electrical Characteristics - Input/Common Parameters

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|-------------------|-------------|---|-----|-----|--------|-------|
| Clk Stabilization | T_{STAB} | From VDD Power-Up or de-assertion of PD# to 1st clock | | 1.8 | ms | 1 |
| Tdrive_PD# | T_{DRPD} | Differential output enable after PD# de-assertion | | 300 | us | 1 |
| Tdrive_CPU | T_{DRSRC} | CPU output enable after CPU_STOP# de-assertion | 2 | 6 | Cycles | 1 |
| Tfall_PD# | T_{FALL} | Fall/rise time of PD# and CPU_STOP# inputs | | 5 | ns | 1 |
| Trise_PD# | T_{RISE} | | | 5 | ns | 1 |

AC Electrical Characteristics - Low Power Differential Outputs

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | NOTES |
|-----------------------------|----------------|--------------------------|------|------|-------|-------|
| Rising Edge Slew Rate | t_{SLR} | Differential Measurement | 0.6 | 4 | V/ns | 1,2 |
| Falling Edge Slew Rate | t_{FLR} | Differential Measurement | 0.6 | 4 | V/ns | 1,2 |
| Rise/Fall Time Variation | t_{SLVAR} | Single-ended Measurement | | 125 | ps | 1 |
| Maximum Output Voltage | V_{HIGH} | Includes overshoot | | 1150 | mV | 1 |
| Minimum Output Voltage | V_{LOW} | Includes undershoot | -300 | | mV | 1 |
| Differential Voltage Swing | V_{SWING} | Differential Measurement | 300 | | mV | 1 |
| Crossing Point Voltage | V_{XABS} | Single-ended Measurement | 300 | 550 | mV | 1,3,4 |
| Crossing Point Variation | $V_{XABSVAR}$ | Single-ended Measurement | | 140 | mV | 1,3,5 |
| Duty Cycle | D_{CYC} | Differential Measurement | 45 | 55 | % | 1 |
| CPU Jitter - Cycle to Cycle | $CPUJ_{C2C}$ | Differential Measurement | | 85 | ps | 1 |
| SRC Jitter - Cycle to Cycle | $SRCJ_{C2C}$ | Differential Measurement | | 125 | ps | 1 |
| DOT Jitter - Cycle to Cycle | $DOTJ_{C2C}$ | Differential Measurement | | 250 | ps | 1 |
| LCD Jitter - Cycle to Cycle | $LCDJ_{C2C}$ | Differential Measurement | | 85 | ps | 1 |
| CPU[2:0] Skew | CPU_{SKEW10} | Differential Measurement | | 100 | ps | 1 |
| SRC[2:0] Skew | SRC_{SKEW} | Differential Measurement | | 250 | ps | 1 |

Electrical Characteristics - REF-14.318MHz

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|-------------------------|-----------------|---|---------|----------|-------|-------|
| Long Accuracy | ppm | see Tperiod min-max values | -300 | 300 | ppm | 1,2 |
| Clock period | T_{period} | 14.318MHz output nominal | 69.8203 | 69.8622 | ns | 2 |
| Absolute min/max period | T_{abs} | 14.318MHz output nominal | 69.8203 | 70.86224 | ns | 2 |
| Output High Voltage | V_{OH} | $I_{OH} = -1$ mA | 2.4 | | V | 1 |
| Output Low Voltage | V_{OL} | $I_{OL} = 1$ mA | | 0.4 | V | 1 |
| Output High Current | I_{OH} | $V_{OH} @ MIN = 1.0$ V, $V_{OH} @ MAX = 3.135$ V | -33 | -33 | mA | 1 |
| Output Low Current | I_{OL} | $V_{OL} @ MIN = 1.95$ V, $V_{OL} @ MAX = 0.4$ V | 30 | 38 | mA | 1 |
| Rising Edge Slew Rate | t_{SLR} | Measured from 0.8 to 2.0 V | 1 | 4 | V/ns | 1 |
| Falling Edge Slew Rate | t_{FLR} | Measured from 2.0 to 0.8 V | 1 | 4 | V/ns | 1 |
| Duty Cycle | d_{11} | $V_T = 1.5$ V | 45 | 55 | % | 1 |
| Jitter | $t_{jycyc-cyc}$ | $V_T = 1.5$ V | | 1000 | ps | 1 |

Electrical Characteristics - SMBus Interface

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|---|--------------|---|-----|------|-------|-------|
| SMBus Voltage | V_{DD} | | 2.7 | 3.6 | V | 1 |
| Low-level Output Voltage | V_{OLSMB} | @ I_{PULLUP} | | 0.4 | V | 1 |
| Current sinking at $V_{OLSMB} = 0.4 V$ | I_{PULLUP} | SMB Data Pin | 4 | | mA | 1 |
| SCLK/SDATA Clock/Data Rise Time | T_{RI2C} | (Max $V_{IL} - 0.15$) to (Min $V_{IH} + 0.15$) | | 1000 | ns | 1 |
| SCLK/SDATA Clock/Data Fall Time | T_{FI2C} | (Min $V_{IH} + 0.15$) to (Max $V_{IL} - 0.15$) | | 300 | ns | 1 |
| Maximum SMBus Operating Frequency | F_{SMBUS} | Block Mode | | 100 | kHz | 1 |

Notes on Electrical Characteristics:

¹Guaranteed by design and characterization, not 100% tested in production.

²Slew rate measured through V_{swing} centered around differential zero

³ V_{xabs} is defined as the voltage where $CLK = CLK\#$

⁴Only applies to the differential rising edge (CLK rising and CLK# falling)

⁵Defined as the total variation of all crossing voltages of CLK rising and CLK# falling. Matching applies to rising edge rate of CLK and falling edge of CLK#. It is measured using a +/-75mV window centered on the average cross point where CLK meets CLK#. The average cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations.

⁶All Long Term Accuracy and Clock Period specifications are guaranteed assuming that REF is at 14.31818MHz

⁷Operation under these conditions is neither implied, nor guaranteed.

⁸Maximum input voltage is not to exceed maximum VDD

⁹See PCI Clock-to-Clock Delay Figure

Clock Periods Differential Outputs with Spread Spectrum Enabled

| Measurement Window | 1 Clock | 1us | 0.1s | 0.1s | 0.1s | 1us | 1 Clock | | | |
|--------------------|-------------------------|-------------------------|-------------------------|---------|-------------------|--------------------|----------|----------|-------|-----|
| Symbol | Lg- | -SSC | -ppm error | 0ppm | + ppm error | +SSC | Lg+ | | | |
| Definition | Absolute Period | Short-term Average | Long-Term Average | Period | Long-Term Average | Short-term Average | Period | Units | Notes | |
| | Minimum Absolute Period | Minimum Absolute Period | Minimum Absolute Period | Nominal | Maximum | Maximum | Maximum | | | |
| Signal Name | SRC 100 | 9.87400 | 9.99900 | 9.99900 | 10.00000 | 10.00100 | 10.05130 | 10.17630 | ns | 1,2 |
| | CPU 100 | 9.91400 | 9.99900 | 9.99900 | 10.00000 | 10.00100 | 10.05130 | 10.13630 | ns | 1,2 |
| | CPU 133 | 7.41425 | 7.49925 | 7.49925 | 7.50000 | 7.50075 | 7.53845 | 7.62345 | ns | 1,2 |

Clock Periods Differential Outputs with Spread Spectrum Disabled

| Measurement Window | 1 Clock | 1us | 0.1s | 0.1s | 0.1s | 1us | 1 Clock | | | |
|--------------------|-------------------------|-------------------------|-------------------------|----------|-------------------|--------------------|---------|----------|-------|-----|
| Symbol | Lg- | -SSC | -ppm error | 0ppm | + ppm error | +SSC | Lg+ | | | |
| Definition | Absolute Period | Short-term Average | Long-Term Average | Period | Long-Term Average | Short-term Average | Period | Units | Notes | |
| | Minimum Absolute Period | Minimum Absolute Period | Minimum Absolute Period | Nominal | Maximum | Maximum | Maximum | | | |
| Signal Name | SRC 100 | 9.87400 | | 9.99900 | 10.00000 | 10.00100 | | 10.17630 | ns | 1,2 |
| | CPU 100 | 9.91400 | | 9.99900 | 10.00000 | 10.00100 | | 10.13630 | ns | 1,2 |
| | CPU 133 | 7.41425 | | 7.49925 | 7.50000 | 7.50075 | | 7.62345 | ns | 1,2 |
| | DOT 96 | 10.16560 | | 10.41560 | 10.41670 | 10.41770 | | 10.66770 | ns | 1,2 |

¹Guaranteed by design and characterization, not 100% tested in production.

²All Long Term Accuracy and Clock Period specifications are guaranteed assuming that REFOUT is at 14.31818MHz

Table 1: CPU Frequency Select Table

| FS _L C ¹ | FS _L B ¹ | CPU MHz | SRC MHz | DOT MHz | LCD100 MHz | REF MHz |
|--------------------------------|--------------------------------|---------|---------|---------|------------|---------|
| 0 | 0 | 133.33 | 100.00 | 96.00 | 100.00 | 14.318 |
| 0 | 1 | 166.67 | | | | |
| 1 | 0 | 100.00 | | | | |
| 1 | 1 | 200.00 | | | | |

1. FS_LC is a low-threshold input. Please see V_{IL_FS} and V_{IH_FS} specifications in the Input/Supply/Common Output Parameters Table for correct values. Also refer to the Test Clarification Table.

Table 2: LCD Spread Select Table (Pin 20/21)

| B1b5 | B1b4 | B1b3 | Spread % | Comment |
|------|------|------|-----------|---------|
| 0 | 0 | 0 | -0.5% | LCD100 |
| 0 | 0 | 1 | -1% | LCD100 |
| 0 | 1 | 0 | -2% | LCD100 |
| 0 | 1 | 1 | -2.5% | LCD100 |
| 1 | 0 | 0 | +/- 0.25% | LCD100 |
| 1 | 0 | 1 | +/-0.5% | LCD100 |
| 1 | 1 | 0 | +/-1% | LCD100 |
| 1 | 1 | 1 | +/-1.25% | LCD100 |

General I²C serial interface information for the ICS9UMS9610

How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D2_(H)
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) sends the data byte count = X
- ICS clock will **acknowledge**
- Controller (host) starts sending **Byte N through Byte N + X - 1**
- ICS clock will **acknowledge** each byte **one at a time**
- Controller (host) sends a Stop bit

| Index Block Write Operation | | |
|---------------------------------|-----------|----------------------|
| Controller (Host) | | ICS (Slave/Receiver) |
| T | starT bit | |
| Slave Address D2 _(H) | | |
| WR | WRite | |
| | | ACK |
| Beginning Byte = N | | |
| | | ACK |
| Data Byte Count = X | | |
| | | ACK |
| Beginning Byte N | | X Byte |
| ○ | | |
| ○ | | |
| ○ | | |
| Byte N + X - 1 | | |
| | | ACK |
| P | stoP bit | |

How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the write address D2_(H)
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) will send a separate start bit.
- Controller (host) sends the read address D3_(H)
- ICS clock will **acknowledge**
- ICS clock will send the data byte count = X
- ICS clock sends **Byte N + X - 1**
- ICS clock sends **Byte 0 through byte X (if X_(H) was written to byte 8).**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a not acknowledge bit
- Controller (host) will send a stop bit

| Index Block Read Operation | | |
|---------------------------------|-----------------|----------------------|
| Controller (Host) | | ICS (Slave/Receiver) |
| T | starT bit | |
| Slave Address D2 _(H) | | |
| WR | WRite | |
| | | ACK |
| Beginning Byte = N | | |
| | | ACK |
| RT | Repeat starT | |
| Slave Address D3 _(H) | | |
| RD | ReaD | |
| | | ACK |
| | | Data Byte Count = X |
| ACK | | |
| | | X Byte |
| ACK | | |
| ○ | | |
| ○ | | |
| ○ | | |
| | | Byte N + X - 1 |
| N | Not acknowledge | |
| P | stoP bit | |

Byte 0 PLL & Divider Enable Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|---------------------------|---|------|--------------|-------------|---------|
| 7 | - | PLL1 Enable | This bit controls whether the PLL driving the CPU and SRC clocks is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 6 | - | PLL2 Enable | This bit controls whether the PLL driving the DOT and clock is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 5 | - | PLL3 Enable | This bit controls whether the PLL driving the LCD clock is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 4 | - | Reserved | | | | | 0 |
| 3 | - | CPU Divider Enable | This bit controls whether the CPU output divider is enabled or not. NOTE: This bit should be automatically set to '0' if bit 7 is set to '0'. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 2 | - | SRC Output Divider Enable | This bit controls whether the SRC output divider is enabled or not. NOTE: This bit should be automatically set to '0' if bit 7 is set to '0'. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 1 | - | LCD Output Divider Enable | This bit controls whether the LCD output divider is enabled or not. NOTE: This bit should be automatically set to '0' if bit 5 is set to '0'. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 0 | - | DOT Output Divider Enable | This bit controls whether the DOT output divider is enabled or not. NOTE: This bit should be automatically set to '0' if bit 6 is set to '0'. | RW | 0 = Disabled | 1 = Enabled | 1 |

Byte 1 PLL SS Enable/Control Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|----------------|---|------|--------------------------------------|-------------|---------|
| 7 | | PLL1 SS Enable | This bit controls whether PLL1 has spread enabled or not. Spread spectrum for PLL1 is set at -0.5% down-spread. Note that PLL1 drives the CPU and SRC clocks. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 6 | | PLL3 SS Enable | This bit controls whether PLL3 has spread enabled or not. Note that PLL3 drives the SSC clock, and that the spread spectrum amount is set in bits 3-5. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 5 | | PLL3 FS Select | These 3 bits select the frequency of PLL3 and the SSC clock when Byte 1 Bit 6 (PLL3 Spread Spectrum Enable) is set. | RW | See Table 2: LCD Spread Select Table | | 0 |
| 4 | 0 | | | | | | |
| 3 | 0 | | | | | | |
| 2 | | Reserved | | | | | 0 |
| 1 | | Reserved | | | | | 0 |
| 0 | | Reserved | | | | | 0 |

Byte 2 Output Enable Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|---------------|---|------|--------------|-------------|---------|
| 7 | | CPU0 Enable | This bit controls whether the CPU[0] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 6 | | CPU1 Enable | This bit controls whether the CPU[1] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 5 | | CPU2 Enable | This bit controls whether the CPU[2] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 4 | | SRC0 Enable | This bit controls whether the SRC[0] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 3 | | SRC1 Enable | This bit controls whether the SRC[1] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 2 | | SRC2 Enable | This bit controls whether the SRC[2] output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 1 | | DOT Enable | This bit controls whether the DOT output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 0 | | LCD100 Enable | This bit controls whether the LCD output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |

Byte 3 Output Control Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|------------------|--|------|--|-------------|---------|
| 7 | | Reserved | | | | | 0 |
| 6 | | Reserved | | | | | 0 |
| 5 | | REF Enable | This bit controls whether the REF output buffer is enabled or not. | RW | 0 = Disabled | 1 = Enabled | 1 |
| 4 | | REF Slew | These bits control the edge rate of the REF clock. | RW | 00 = Slow Edge Rate 01 = Medium Edge Rate 10 = Fast Edge Rate 11 = Reserved | | 10 |
| 3 | | | | | | | |
| 2 | | CPU0 Stop Enable | This bit controls whether the CPU[0] output buffer is free-running or stoppable. If it is set to stoppable the CPU[0] output buffer will be disabled with the assertion of CPU_STP#. | RW | Free Running | Stoppable | 0 |
| 1 | | CPU1 Stop Enable | This bit controls whether the CPU[1] output buffer is free-running or stoppable. If it is set to stoppable the CPU[1] output buffer will be disabled with the assertion of CPU_STP#. | RW | Free Running | Stoppable | 0 |
| 0 | | CPU2 Stop Enable | This bit controls whether the CPU[2] output buffer is free-running or stoppable. If it is set to stoppable the CPU[2] output buffer will be disabled with the assertion of CPU_STP#. | RW | Free Running | Stoppable | 0 |

Byte 4 CPU PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|------------|---------------------------------|------|--|---|---------|
| Bit 7 | | CPU N Div8 | N Divider Prog bit 8 | RW | The decimal representation of M and N Divider in Byte 4 and 5 will configure the CPU VCO frequency. Default at power up = latch-in. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | CPU N Div9 | N Divider Prog bit 9 | RW | | X | |
| Bit 5 | | CPU M Div5 | M Divider Programming bit (5:0) | RW | | X | |
| Bit 4 | | CPU M Div4 | | RW | | X | |
| Bit 3 | | CPU M Div3 | | RW | | X | |
| Bit 2 | | CPU M Div2 | | RW | | X | |
| Bit 1 | | CPU M Div1 | | RW | | X | |
| Bit 0 | | CPU M Div0 | | RW | | X | |

Byte 5 CPU PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|------------|---|------|--|---|---------|
| Bit 7 | | CPU N Div7 | N Divider Programming Byte5 bit(7:0) and Byte5 bit(7:6) | RW | The decimal representation of M and N Divider in Byte 4 and 5 will configure the CPU VCO frequency. Default at power up = latch-in. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | CPU N Div6 | | RW | | X | |
| Bit 5 | | CPU N Div5 | | RW | | X | |
| Bit 4 | | CPU N Div4 | | RW | | X | |
| Bit 3 | | CPU N Div3 | | RW | | X | |
| Bit 2 | | CPU N Div2 | | RW | | X | |
| Bit 1 | | CPU N Div1 | | RW | | X | |
| Bit 0 | | CPU N Div0 | | RW | | X | |

Byte 6 DOT96 PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|------------|---------------------------------|------|--|---|---------|
| Bit 7 | | DOT N Div8 | N Divider Prog bit 8 | RW | The decimal representation of M and N Divider in Byte 6 and 7 will configure the DOT VCO frequency. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | DOT N Div9 | N Divider Prog bit 9 | RW | | X | |
| Bit 5 | | DOT M Div5 | M Divider Programming bit (5:0) | RW | | X | |
| Bit 4 | | DOT M Div4 | | RW | | X | |
| Bit 3 | | DOT M Div3 | | RW | | X | |
| Bit 2 | | DOT M Div2 | | RW | | X | |
| Bit 1 | | DOT M Div1 | | RW | | X | |
| Bit 0 | | DOT M Div0 | | RW | | X | |

Byte 7 DOT96 PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|------------|---|------|--|---|---------|
| Bit 7 | | DOT N Div7 | N Divider Programming Byte7 bit(7:0) and Byte6 bit(7:6) | RW | The decimal representation of M and N Divider in Byte 6 and 7 will configure the DOT VCO frequency. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | DOT N Div6 | | RW | | X | |
| Bit 5 | | DOT N Div5 | | RW | | X | |
| Bit 4 | | DOT N Div4 | | RW | | X | |
| Bit 3 | | DOT N Div3 | | RW | | X | |
| Bit 2 | | DOT N Div2 | | RW | | X | |
| Bit 1 | | DOT N Div1 | | RW | | X | |
| Bit 0 | | DOT N Div0 | | RW | | X | |

Byte 8 LCD100 PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|---------------|---------------------------------|------|--|---|---------|
| Bit 7 | | LCD100 N Div8 | N Divider Prog bit 8 | RW | The decimal representation of M and N Divider in Byte 8 and 9 will configure the DOT VCO frequency. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | LCD100 N Div9 | N Divider Prog bit 9 | RW | | | X |
| Bit 5 | | LCD100 M Div5 | M Divider Programming bit (5:0) | RW | | | X |
| Bit 4 | | LCD100 M Div4 | | RW | | | X |
| Bit 3 | | LCD100 M Div3 | | RW | | | X |
| Bit 2 | | LCD100 M Div2 | | RW | | | X |
| Bit 1 | | LCD100 M Div1 | | RW | | | X |
| Bit 0 | | LCD100 M Div0 | | RW | | | X |

Byte 9 LCD100 PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|---------------|---|------|--|---|---------|
| Bit 7 | | LCD100 N Div7 | N Divider Programming Byte9 bit(7:0) and Byte8 bit(7:6) | RW | The decimal representation of M and N Divider in Byte 8 and 9 will configure the DOT VCO frequency. VCO Frequency = $14.318 \times [\text{NDiv}(11:0)] / [\text{MDiv}(5:0)]$ | | X |
| Bit 6 | | LCD100 N Div6 | | RW | | | X |
| Bit 5 | | LCD100 N Div5 | | RW | | | X |
| Bit 4 | | LCD100 N Div4 | | RW | | | X |
| Bit 3 | | LCD100 N Div3 | | RW | | | X |
| Bit 2 | | LCD100 N Div2 | | RW | | | X |
| Bit 1 | | LCD100 N Div1 | | RW | | | X |
| Bit 0 | | LCD100 N Div0 | | RW | | | X |

Byte 10 Status Readback Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|-------------|--------------------------------|------|---|--------------|---------|
| 7 | 37 | FSB | Frequency Select B | R | See Table 1: CPU Frequency Select Table | | Latch |
| 6 | 9 | FSC | Frequency Select C | R | | | Latch |
| 5 | 24 | CR0# Readbk | Real time CR0# State Indicator | R | CR0# is Low | CR0# is High | X |
| 4 | 28 | CR1# Readbk | Real time CR1# State Indicator | R | CR1# is Low | CR1# is High | X |
| 3 | 36 | CR2# Readbk | Real time CR2# State Indicator | R | CR2# is Low | CR2# is High | X |
| 2 | | Reserved | | | | | 0 |
| 1 | | Reserved | | | | | 0 |
| 0 | | Reserved | | | | | 0 |

Byte 11 Revision ID/Vendor ID Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default | |
|--------|-------|-----------------|-------------|------|-----------------|---|---------|---|
| 7 | | Rev Code Bit 3 | Revision ID | R | Vendor specific | | X | |
| 6 | | Rev Code Bit 2 | | R | | | X | |
| 5 | | Rev Code Bit 1 | | R | | | X | |
| 4 | | Rev Code Bit 0 | | R | | | X | |
| 3 | | Vendor ID bit 3 | Vendor ID | R | | | | 0 |
| 2 | | Vendor ID bit 2 | | R | | | | 0 |
| 1 | | Vendor ID bit 1 | | R | | | | 0 |
| 0 | | Vendor ID bit 0 | | R | | | | 1 |

Byte 12 Device ID Register

| Bit(s) | Pin # | Name | Description | Type | 0 | 1 | Default |
|--------|-------|----------|---------------|------|---|---|---------|
| 7 | | DEV_ID3 | Device ID MSB | R | | | 1 |
| 6 | | DEV_ID2 | Device ID 2 | R | | | 0 |
| 5 | | DEV_ID1 | Device ID 1 | R | | | 1 |
| 4 | | DEV_ID0 | Device ID LSB | R | | | 0 |
| 3 | | Reserved | | | | | 0 |
| 2 | | Reserved | | | | | 0 |
| 1 | | Reserved | | | | | 0 |
| 0 | | Reserved | | | | | 0 |

Byte 13 Reserved Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|----------|------------------|------|---|---|---------|
| Bit 7 | | Reserved | | | | | 0 |
| Bit 6 | | Reserved | | | | | 0 |
| Bit 5 | | Reserved | | | | | 0 |
| Bit 4 | | Reserved | | | | | 0 |
| Bit 3 | | Reserved | | | | | 0 |
| Bit 2 | | Reserved | | | | | 0 |
| Bit 1 | | Reserved | | | | | 0 |
| Bit 0 | | Reserved | | | | | 0 |

Byte 14 Reserved Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|----------|------------------|------|---|---|---------|
| Bit 7 | | Reserved | | | | | 0 |
| Bit 6 | | Reserved | | | | | 0 |
| Bit 5 | | Reserved | | | | | 0 |
| Bit 4 | | Reserved | | | | | 0 |
| Bit 3 | | Reserved | | | | | 0 |
| Bit 2 | | Reserved | | | | | 0 |
| Bit 1 | | Reserved | | | | | 0 |
| Bit 0 | | Reserved | | | | | 0 |

Byte 15 Byte Count Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|----------|--------------------|------|--|---|---------|
| Bit 7 | | Reserved | | | | | 0 |
| Bit 6 | | BC6 | Byte Count 6 (MSB) | RW | Specifies Number of bytes to be read back during an SMBus read. Default is 0xF. | | 0 |
| Bit 5 | | BC5 | Byte Count 5 | RW | | 0 | |
| Bit 4 | | BC4 | Byte Count 4 | RW | | 0 | |
| Bit 3 | | BC3 | Byte Count 3 | RW | | 1 | |
| Bit 2 | | BC2 | Byte Count 2 | RW | | 1 | |
| Bit 1 | | BC1 | Byte Count 1 | RW | | 1 | |
| Bit 0 | | BC0 | Byte Count LSB | RW | | 1 | |

Byte 16 M/N Enable Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|-----------|----------------------------|------|-------------|------------|---------|
| Bit 7 | | MN Enable | Enables PLL MN programming | RW | MN Disabled | MN Enabled | 0 |
| Bit 6 | | Reserved | | | | | 0 |
| Bit 5 | | Reserved | | | | | 0 |
| Bit 4 | | Reserved | | | | | 0 |
| Bit 3 | | Reserved | | | | | 0 |
| Bit 2 | | Reserved | | | | | 0 |
| Bit 1 | | Reserved | | | | | 0 |
| Bit 0 | | Reserved | | | | | 0 |

Byte 17 CPU PLL Spread Spectrum Index Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|---------|--|------|---|---|---------|
| Bit 7 | | CPUSSP7 | Spread Spectrum Programming bit(7:0) Contact IDT before editing these values. | RW | These Spread Spectrum bits in Byte 17 and 18 will program the spread percentage of the CPU and SRC outputs | | X |
| Bit 6 | | CPUSSP6 | | RW | | | X |
| Bit 5 | | CPUSSP5 | | RW | | | X |
| Bit 4 | | CPUSSP4 | | RW | | | X |
| Bit 3 | | CPUSSP3 | | RW | | | X |
| Bit 2 | | CPUSSP2 | | RW | | | X |
| Bit 1 | | CPUSSP1 | | RW | | | X |
| Bit 0 | | CPUSSP0 | | RW | | | X |

Byte 18 CPU PLL Spread Spectrum Index Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|----------|---|------|---|---|---------|
| Bit 7 | | CPUSSP15 | Spread Spectrum Programming bit(15:8) Contact IDT before editing these values. | RW | These Spread Spectrum bits in Byte 17 and 18 will program the spread percentage of the CPU and SRC outputs | | X |
| Bit 6 | | CPUSSP14 | | RW | | | X |
| Bit 5 | | CPUSSP13 | | RW | | | X |
| Bit 4 | | CPUSSP12 | | RW | | | X |
| Bit 3 | | CPUSSP11 | | RW | | | X |
| Bit 2 | | CPUSSP10 | | RW | | | X |
| Bit 1 | | CPUSSP9 | | RW | | | X |
| Bit 0 | | CPUSSP8 | | RW | | | X |

Byte 19 LCD100 PLL Spread Spectrum Index Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|---------|--|------|---|---|---------|
| Bit 7 | | LCDSSP7 | Spread Spectrum Programming bit(7:0) Contact IDT before editing these values. | RW | These Spread Spectrum bits in Byte 19 and 20 will program the spread percentage of the CPU and SRC outputs | | X |
| Bit 6 | | LCDSSP6 | | RW | | | X |
| Bit 5 | | LCDSSP5 | | RW | | | X |
| Bit 4 | | LCDSSP4 | | RW | | | X |
| Bit 3 | | LCDSSP3 | | RW | | | X |
| Bit 2 | | LCDSSP2 | | RW | | | X |
| Bit 1 | | LCDSSP1 | | RW | | | X |
| Bit 0 | | LCDSSP0 | | RW | | | X |

Byte 20 LCD100 PLL Spread Spectrum Index Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|----------|---|------|---|---|---------|
| Bit 7 | | LCDSSP15 | Spread Spectrum Programming bit(15:8) Contact IDT before editing these values. | RW | These Spread Spectrum bits in Byte 19 and 20 will program the spread percentage of the CPU and SRC outputs | | X |
| Bit 6 | | LCDSSP14 | | RW | | | X |
| Bit 5 | | LCDSSP13 | | RW | | | X |
| Bit 4 | | LCDSSP12 | | RW | | | X |
| Bit 3 | | LCDSSP11 | | RW | | | X |
| Bit 2 | | LCDSSP10 | | RW | | | X |
| Bit 1 | | LCDSSP9 | | RW | | | X |
| Bit 0 | | LCDSSP8 | | RW | | | X |

Byte 21 CPU PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|-------------|-----------------------|------|--------------------------|---|---------|
| Bit 7 | | CPU NDIV 10 | N Divider Prog bit 10 | RW | See Byte 4/5 Description | | X |
| Bit 6 | | CPU NDIV 11 | N Divider Prog bit 11 | RW | | | X |
| Bit 5 | | Reserved | | | | | 0 |
| Bit 4 | | Reserved | | | | | 0 |
| Bit 3 | | Reserved | | | | | 0 |
| Bit 2 | | Reserved | | | | | 0 |
| Bit 1 | | Reserved | | | | | 0 |
| Bit 0 | | Reserved | | | | | 0 |


Byte 22 LCD100 PLL M/N Register

| Bit(s) | Pin # | Name | Control Function | Type | 0 | 1 | Default |
|--------|-------|-------------|-----------------------|------|--------------------------|---|---------|
| Bit 7 | | LCD NDIV 10 | N Divider Prog bit 10 | RW | See Byte 8/9 Description | | X |
| Bit 6 | | LCD NDIV 11 | N Divider Prog bit 11 | RW | | | X |
| Bit 5 | | Reserved | | | | | 0 |
| Bit 4 | | Reserved | | | | | 0 |
| Bit 3 | | Reserved | | | | | 0 |
| Bit 2 | | Reserved | | | | | 0 |
| Bit 1 | | Reserved | | | | | 0 |
| Bit 0 | | Reserved | | | | | 0 |


Test Clarification Table

| Comments | HW | | OUTPUT |
|---|--------------------|---------------------|--------|
| | TEST_SEL HW PIN | TEST_MODE HW PIN | |
| | <0.35V | X | NORMAL |
| Power-up w/ TEST_SEL = 1 to enter test mode Cycle power to disable test mode TEST_MODE -->low Vth input TEST_MODE is a real time input | >0.7V | <0.35V | HI-Z |
| | >0.7V | >0.7V | REF/N |

MLF Top Mark Information (9UMS9610)

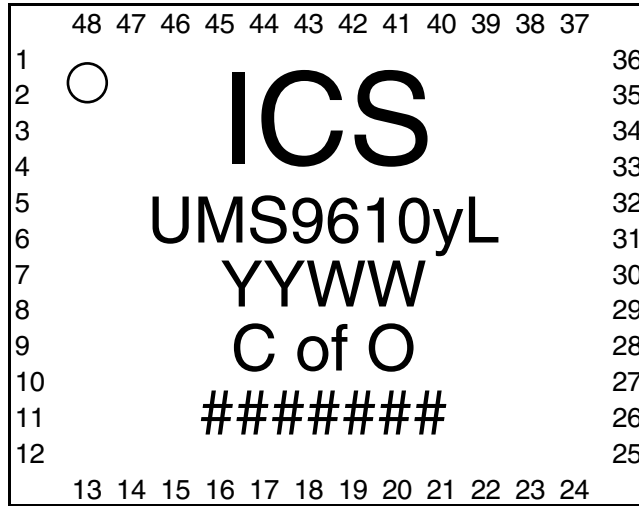

- Line 1. Company name
- Line 2. Part Number
- Line 3. YYWW = Date Code
- Line 3. Country of Origin
- Line 4. ##### = Lot Number

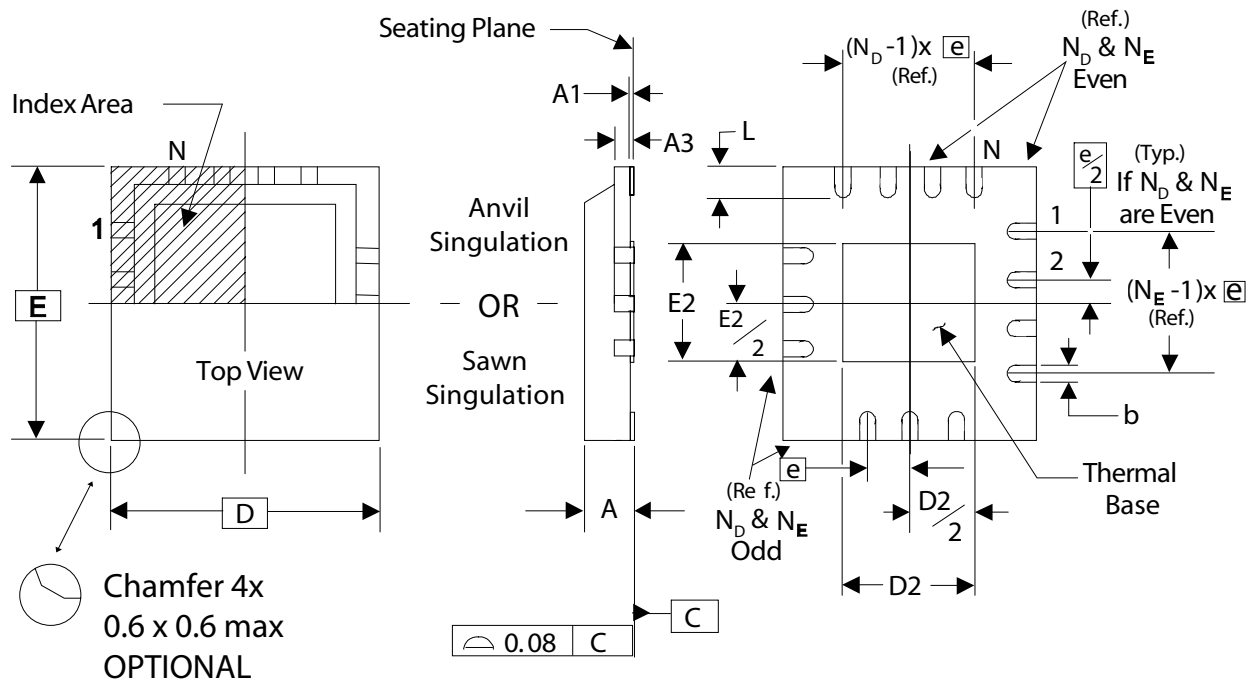

**THERMALLY ENHANCED, VERY THIN, FINE PITCH
QUAD FLAT / NO LEAD PLASTIC PACKAGE**

DIMENSIONS

| SYMBOL | MIN. | MAX. |
|--------|----------------|------|
| A | 0.8 | 1.0 |
| A1 | 0 | 0.05 |
| A3 | 0.20 Reference | |
| b | 0.18 | 0.3 |
| e | 0.40 BASIC | |

DIMENSIONS

| SYMBOL | 48L TOLERANCE |
|----------------|------------------|
| N | 48 |
| N_D | 12 |
| N_E | 12 |
| D x E BASIC | 6.00 x 6.00 |
| D2 MIN. / MAX. | 3.95 / 4.25 |
| E2 MIN. / MAX. | 3.95 / 4.25 |
| L MIN. / MAX. | 0.30 / 0.50 |

Ordering Information

| Part / Order Number | Marking | Shipping Packaging | Package | Temperature |
|---------------------|-------------|--------------------|------------|-------------|
| 9UMS9610CKLF | see page 18 | Tubes | 48-pin MLF | 0 to +85° C |
| 9UMS9610CKLFT | | Tape and Reel | 48-pin MLF | 0 to +85° C |

Parts that are ordered with a "LF" suffix to the part number are the Pb-Free configuration and are RoHS compliant.

Revision History

| Rev. | Issue Date | Description | Page # |
|------|------------|--|---------|
| 0.1 | 04/25/07 | Initial Release | - |
| 0.15 | 05/03/07 | Corrected CLKPWRGD#/PD polarity | 1 |
| 0.2 | 5/18/2007 | Updated Test Clarification Table with the correct voltage levels. | - |
| 0.3 | 8/31/2007 | Updated Input Pin names to indicate maximum Input voltage level | - |
| 0.4 | 9/11/2007 | Added Logic Level and Input Level Tolerance Columns to Pin Descriptions. | 2, 3 |
| 0.5 | 9/13/2007 | Clarified that X1 is 1.5V only input | 2 |
| 0.6 | 10/23/007 | 1. Byte Count in Byte 15 is 7 bits, not 8 bits. B15b7 is now reserved. 2. Modified PLL programming formulas in Bytes(4:9). N is 12 bits instead of 10 bits. 3. Changed REF_3.3 output name to reflect default drive strength (new name is REF_3.3_2x). | Various |
| 0.7 | 11/6/2007 | Updated Bytes [9:4]. | 12-13 |
| 0.8 | 11/29/2007 | Added Bytes 16-22 to the SMBUS. | 15-16 |
| 0.9 | 2/26/2008 | Added MLF Top Mark Information. | 18 |
| 0.91 | 7/8/2008 | Updated Electrical Specifications | 5-7 |
| 0.92 | 7/21/2008 | Updated Electrical Specifications | 5-7 |
| A | 5/21/2009 | Moved to final. | - |
| B | 6/1/2009 | Updated electrical specs; TA spec in ordering information. | Various |

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Clock Generators & Support Products](#) category:

Click to view products by [Renesas](#) manufacturer:

Other Similar products are found below :

[CV183-2TPAG](#) [950810CGLF](#) [9DBV0741AKILF](#) [9VRS4420DKLF](#) [CY25404ZXI226](#) [CY25422SXI-004](#) [MPC9893AE](#) [NB3H5150-01MNTXG](#) [PL602-20-K52TC](#) [ICS557GI-03LF](#) [PI6LC48P0101LIE](#) [82P33814ANLG](#) [840021AGLF](#) [ZL30244LFG7](#) [PI6LC48C21LE](#) [ZL30245LFG7](#) [PI6LC48P0405LIE](#) [PI6LC48P03LE](#) [MAX24505EXG+](#) [ZL30163GDG2](#) [5L1503L-000NVGI8](#) [ZL30156GGG2](#) [ZL30673LFG7](#) [MAX24188ETK2](#) [ZL30152GGG2](#) [5L1503-000NVGI8](#) [PI6C557-01BZHIEX](#) [PI6LC48C21LIE](#) [CY2542QC002](#) [5P35023-106NLGI](#) [5X1503L-000NLGI8](#) [ZL30121GGG2V2](#) [ZL30282LDG1](#) [ZL30102QDG1](#) [ZL30159GGG2](#) [DS1070K](#) [ZL30145GGG2](#) [ZL30312GKG2](#) [MAX24405EXG2](#) [ZL30237GGG2](#) [SY100EL34LZG](#) [9FGV1002BQ506LTGI](#) [AD9518-4ABCPZ](#) [MX852BB0030](#) [PI6LC4840ZHE](#) [AD9516-0BCPZ-REEL7](#) [AD9574BCPZ-REEL7](#) [PL602-21TC-R](#) [ZL30105QDG1](#) [ZL30100QDG1](#)