

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

HETERO JUNCTION FIELD EFFECT TRANSISTOR  
**NE3210S01**

**X to Ku BAND SUPER LOW NOISE AMPLIFIER  
 N-CHANNEL HJ-FET**

**DESCRIPTION**

The NE3210S01 is a Hetero Junction FET that utilizes the hetero junction to create high mobility electrons. Its excellent low noise and associated gain make it suitable for DBS and another commercial systems.

**FEATURES**

- Super Low Noise Figure & High Associated Gain  
 NF = 0.35 dB TYP. Ga = 13.5 dB TYP. at f = 12 GHz
- Gate Length:  $L_g \leq 0.20 \mu\text{m}$
- Gate Width :  $W_g = 160 \mu\text{m}$

**ORDERING INFORMATION (PLAN)**

Part Number	Supplying Form	Marking
NE3210S01-T1	Tape & reel 1 000 pcs./reel	K
NE3210S01-T1B	Tape & reel 4 000 pcs./reel	

**Remark** For sample order, please contact your local NEC sales office. (Part number for sample order: NE3210S01)

**ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)**

Parameter	Symbol	Ratings	Unit
Drain to Source Voltage	V <sub>DS</sub>	4.0	V
Gate to Source Voltage	V <sub>GS</sub>	-3.0	V
Drain Current	I <sub>D</sub>	IDSS	mA
Gate Current	I <sub>G</sub>	100	μA
Total Power Dissipation	P <sub>tot</sub>	165	mW
Channel Temperature	T <sub>ch</sub>	125	°C
Storage Temperature	T <sub>stg</sub>	-65 to +125	°C

**RECOMMENDED OPERATING CONDITIONS (T<sub>A</sub> = +25°C)**





Characteristics	Symbol	MIN.	TYP.	MAX.	Unit
★ Drain to Source Voltage	V <sub>DS</sub>	1	2	3	V
★ Drain Current	I <sub>D</sub>	5	10	15	mA
Input Power	P <sub>in</sub>	-	-	0	dBm

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
 Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = +25 °C)**

Characteristics	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Gate to Source Leak Current	I <sub>GSO</sub>	V <sub>GS</sub> = -3 V	-	0.5	10	μA
Saturated Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = 2 V, V <sub>GS</sub> = 0 V	15	40	70	mA
Gate to Source Cut off Voltage	V <sub>GS (off)</sub>	V <sub>DS</sub> = 2 V, I <sub>DS</sub> = 100 μA	-0.2	-0.7	-2.0	V
Transconductance	g <sub>m</sub>	V <sub>DS</sub> = 2 V, I <sub>DS</sub> = 10 mA	40	55	-	mS
Noise Figure	NF	V <sub>DS</sub> = 2 V, I <sub>DS</sub> = 10 mA	-	0.35	0.45	dB
Associated Gain	G <sub>a</sub>	f = 12 GHz	12.0	13.5	-	dB



TYPICAL CHARACTERISTICS (T<sub>A</sub> = +25 °C)

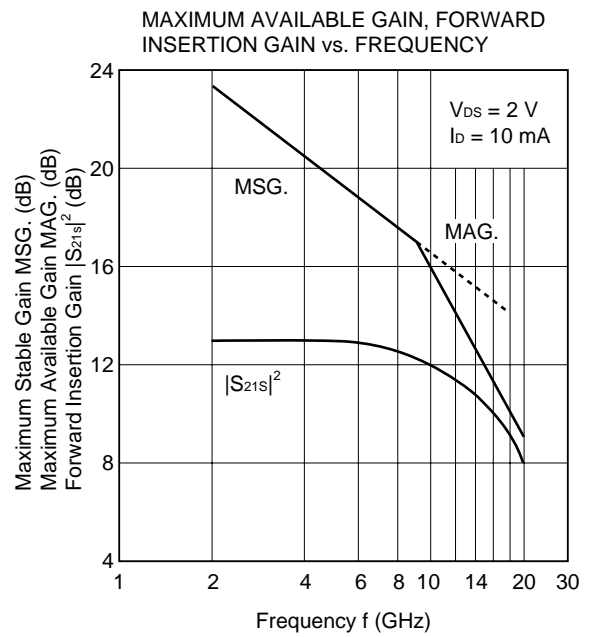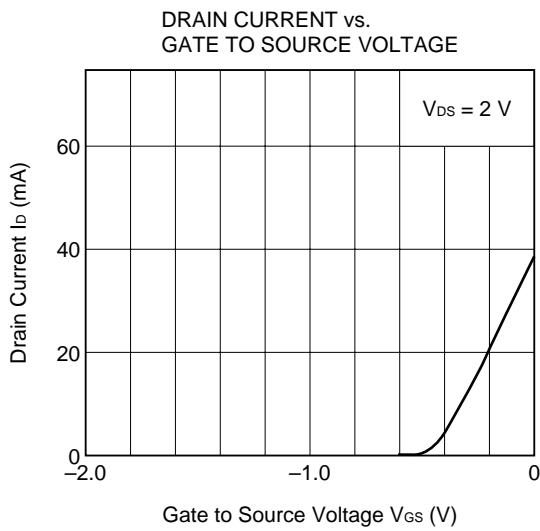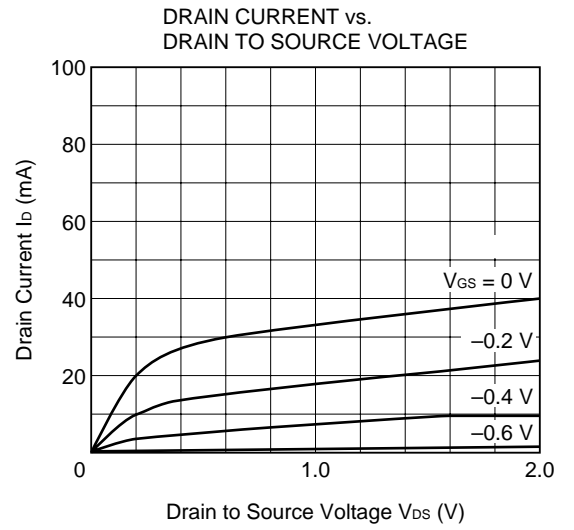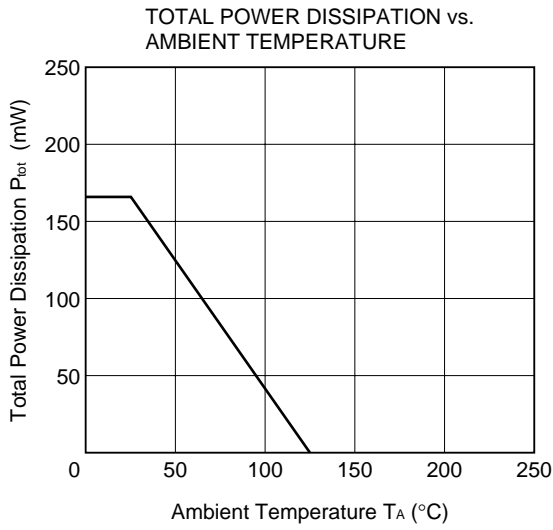

Gain Calculations

$$MSG. = \left| \frac{S_{21}}{S_{12}} \right| \quad K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}| |S_{21}|}$$

$$MAG. = \left| \frac{S_{21}}{S_{12}} \right| (k \pm \sqrt{k^2 - 1}) \quad \Delta = S_{11} \cdot S_{22} - S_{21} \cdot S_{12}$$

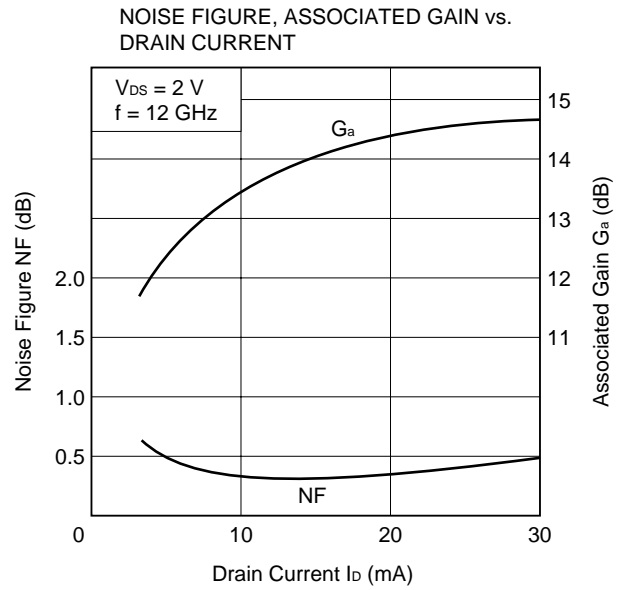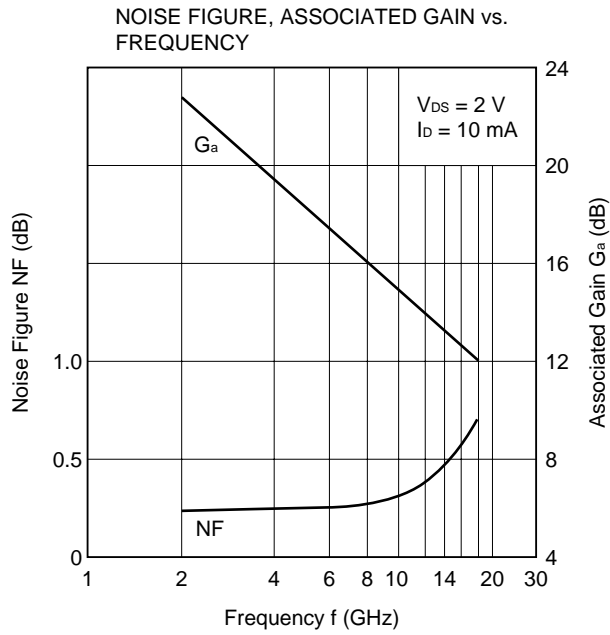

**S-PARAMETERS**

**MAG. AND ANG.**

**V<sub>DS</sub> = 2 V, I<sub>D</sub> = 10 mA**

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
2000.0000	0.973	-21.2	4.450	154.2	0.022	75.9	0.550	-15.2
2500.0000	0.951	-27.7	4.453	147.1	0.028	71.2	0.538	-19.9
3000.0000	0.935	-34.3	4.439	140.3	0.033	66.7	0.523	-25.2
3500.0000	0.914	-40.6	4.389	133.5	0.038	63.5	0.511	-30.3
4000.0000	0.893	-46.3	4.314	127.3	0.042	57.7	0.500	-34.9
4500.0000	0.872	-51.4	4.230	121.1	0.045	54.5	0.495	-39.1
5000.0000	0.848	-55.9	4.158	115.3	0.048	49.7	0.492	-42.9
5500.0000	0.829	-60.0	4.118	109.9	0.050	48.2	0.484	-45.8
6000.0000	0.814	-64.8	4.130	104.3	0.053	46.1	0.482	-48.8
6500.0000	0.781	-70.1	4.149	98.3	0.058	42.8	0.472	-52.6
7000.0000	0.745	-76.3	4.180	91.8	0.063	40.4	0.450	-56.3
7500.0000	0.699	-82.7	4.170	85.3	0.065	36.6	0.423	-59.2
8000.0000	0.660	-90.3	4.184	78.7	0.070	33.7	0.393	-62.6
8500.0000	0.635	-99.8	4.197	71.7	0.074	29.4	0.360	-67.3
9000.0000	0.602	-109.5	4.171	64.7	0.077	25.4	0.327	-72.4
9500.0000	0.578	-118.3	4.109	57.9	0.081	22.3	0.290	-78.8
10000.0000	0.554	-127.2	4.063	51.3	0.086	18.9	0.268	-86.8
10500.0000	0.537	-135.2	4.030	44.6	0.092	15.3	0.251	-96.2
11000.0000	0.507	-144.1	3.978	37.6	0.095	10.8	0.233	-105.3
11500.0000	0.477	-154.0	3.950	30.8	0.099	5.9	0.224	-114.3
12000.0000	0.445	-166.2	3.906	23.5	0.103	2.1	0.211	-123.1
12500.0000	0.428	-179.6	3.851	16.0	0.108	-2.2	0.187	-132.5
13000.0000	0.418	165.3	3.762	8.5	0.110	-6.6	0.157	-146.2
13500.0000	0.430	150.6	3.642	1.1	0.111	-10.3	0.123	-164.0
14000.0000	0.453	137.9	3.517	-6.1	0.110	-14.8	0.110	169.0
14500.0000	0.486	126.7	3.395	-13.0	0.112	-19.6	0.125	141.4
15000.0000	0.513	116.7	3.259	-19.9	0.111	-22.0	0.161	121.7
15500.0000	0.526	108.4	3.150	-26.4	0.113	-25.6	0.207	113.4
16000.0000	0.531	100.4	3.046	-33.3	0.110	-29.3	0.255	109.0
16500.0000	0.539	91.1	2.911	-40.7	0.112	-32.1	0.299	105.4
17000.0000	0.533	82.1	2.739	-48.0	0.111	-36.1	0.329	101.5
17500.0000	0.537	72.2	2.573	-54.3	0.110	-40.1	0.343	95.9
18000.0000	0.546	64.7	2.400	-59.4	0.106	-41.6	0.347	90.6

**AMPLIFIER PARAMETERS**

**V<sub>DS</sub> = 2 V, I<sub>D</sub> = 10 mA**

FREQUENCY MHz	GU <sub>max</sub> dB	GA <sub>max</sub> dB	S <sub>21</sub>   <sup>2</sup> dB	S <sub>12</sub>   <sup>2</sup> dB	K	Delay nsec	Mason's U dB	G1 dB	G2 dB
2000.0000	27.26		12.97	-33.03	0.27	0.389	31.735	12.72	1.56
2500.0000	24.63		12.97	-31.20	0.38	0.040	27.870	10.18	1.48
3000.0000	23.33		12.95	-29.75	0.42	0.038	26.985	9.00	1.39
3500.0000	21.99		12.85	-28.44	0.47	0.038	26.594	7.83	1.32
4000.0000	20.87		12.70	-27.53	0.54	0.035	24.253	6.92	1.25
4500.0000	19.95		12.53	-26.98	0.60	0.034	23.581	6.21	1.22
5000.0000	19.11		12.38	-26.29	0.67	0.032	22.154	5.53	1.21
5500.0000	18.50		12.29	-26.00	0.73	0.030	22.043	5.05	1.16
6000.0000	18.19		12.32	-25.48	0.74	0.031	22.571	4.73	1.15
6500.0000	17.54		12.36	-24.70	0.79	0.034	21.992	4.09	1.09
7000.0000	16.92		12.42	-24.08	0.84	0.036	21.786	3.51	0.98
7500.0000	16.18		12.40	-23.76	0.94	0.036	20.486	2.92	0.86
8000.0000	15.65		12.43	-23.13	0.98	0.037	20.250	2.49	0.73
8500.0000	15.30		12.46	-22.59	1.00	0.039	20.283	2.24	0.60
9000.0000	14.85	16.16	12.40	-22.22	1.04	0.039	20.009	1.96	0.49
9500.0000	14.42	15.56	12.27	-21.80	1.06	0.038	19.986	1.77	0.38
10000.0000	14.09	15.25	12.18	-21.32	1.06	0.037	20.235	1.59	0.32
10500.0000	13.87	15.24	12.11	-20.75	1.04	0.037	21.050	1.48	0.28
11000.0000	13.52	14.66	11.99	-20.46	1.07	0.039	20.646	1.29	0.24
11500.0000	13.28	14.39	11.93	-20.07	1.07	0.038	20.667	1.12	0.22
12000.0000	12.99	13.98	11.83	-19.76	1.09	0.041	20.584	0.96	0.20
12500.0000	12.74	13.69	11.71	-19.35	1.09	0.042	20.774	0.88	0.15
13000.0000	12.45	13.26	11.51	-19.17	1.12	0.042	20.290	0.83	0.11
13500.0000	12.18	12.87	11.23	-19.12	1.14	0.041	19.748	0.89	0.07
14000.0000	11.97	12.58	10.92	-19.15	1.16	0.040	19.301	1.00	0.05
14500.0000	11.86	12.48	10.62	-19.02	1.15	0.038	19.613	1.17	0.07
15000.0000	11.70	12.27	10.26	-19.06	1.16	0.039	19.428	1.33	0.11
15500.0000	11.56	12.16	9.97	-18.90	1.14	0.036	19.651	1.41	0.19
16000.0000	11.41	11.97	9.67	-19.17	1.16	0.038	18.875	1.44	0.29
16500.0000	11.18	11.75	9.28	-19.03	1.16	0.041	18.560	1.49	0.41
17000.0000	10.70	11.16	8.75	-19.11	1.21	0.041	16.897	1.45	0.50
17500.0000	10.23	10.54	8.21	-19.15	1.27	0.035	15.483	1.48	0.54
18000.0000	9.70	9.85	7.60	-19.53	1.39	0.028	13.782	1.54	0.56



**S-PARAMETERS**

**MAG. AND ANG.**

**V<sub>DS</sub> = 0 V, V<sub>GS</sub> = 0 V**

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
2000.0000	0.987	-21.3	0.013	103.3	0.015	109.1	0.775	151.9
2500.0000	0.984	-27.9	0.019	103.6	0.020	102.3	0.786	145.8
3000.0000	0.978	-34.8	0.024	106.2	0.026	106.6	0.786	140.4
3500.0000	0.973	-41.5	0.031	102.7	0.033	105.2	0.787	134.6
4000.0000	0.967	-47.7	0.039	99.2	0.039	101.9	0.786	129.0
4500.0000	0.964	-53.6	0.048	97.3	0.048	99.3	0.783	123.0
5000.0000	0.959	-59.1	0.056	95.2	0.057	94.9	0.782	116.4
5500.0000	0.954	-64.8	0.067	90.9	0.068	90.9	0.781	109.7
6000.0000	0.948	-70.7	0.077	85.9	0.079	86.8	0.782	103.2
6500.0000	0.944	-77.9	0.087	81.4	0.090	81.4	0.781	96.6
7000.0000	0.934	-85.5	0.102	76.1	0.104	76.8	0.785	90.2
7500.0000	0.920	-95.5	0.117	70.0	0.118	70.2	0.796	84.7
8000.0000	0.906	-106.1	0.132	62.7	0.132	62.9	0.802	80.4
8500.0000	0.893	-117.9	0.144	55.8	0.144	55.2	0.814	76.7
9000.0000	0.885	-129.6	0.155	48.4	0.158	48.7	0.819	73.8
9500.0000	0.877	-140.4	0.167	41.9	0.166	42.2	0.830	70.7
10000.0000	0.873	-151.4	0.177	35.7	0.179	35.9	0.832	67.9
10500.0000	0.876	-162.1	0.190	28.8	0.193	29.2	0.836	64.3
11000.0000	0.874	-173.2	0.205	21.9	0.206	21.4	0.838	60.7
11500.0000	0.874	174.1	0.219	13.9	0.218	13.5	0.837	56.5
12000.0000	0.867	160.1	0.228	5.1	0.229	5.2	0.839	52.1
12500.0000	0.870	146.2	0.232	-4.0	0.232	-3.5	0.838	47.3
13000.0000	0.872	132.8	0.230	-11.4	0.232	-11.6	0.845	42.8
13500.0000	0.874	121.0	0.227	-19.4	0.227	-19.7	0.854	38.5
14000.0000	0.884	110.6	0.218	-26.4	0.221	-25.5	0.862	35.9
14500.0000	0.899	101.9	0.211	-30.5	0.215	-30.6	0.871	34.0
15000.0000	0.904	92.9	0.208	-35.0	0.208	-35.4	0.879	33.5
15500.0000	0.907	85.1	0.201	-39.5	0.201	-40.0	0.882	33.0
16000.0000	0.907	77.7	0.198	-43.9	0.200	-44.0	0.876	32.4
16500.0000	0.900	69.3	0.198	-49.3	0.198	-49.5	0.877	30.8
17000.0000	0.881	60.5	0.192	-54.4	0.194	-54.5	0.878	28.5
17500.0000	0.860	52.8	0.183	-59.2	0.186	-60.2	0.875	25.4
18000.0000	0.846	46.0	0.176	-63.5	0.176	-63.9	0.866	21.4

AMPLIFIER PARAMETERS

V<sub>DS</sub> = 0 V, V<sub>GS</sub> = 0 V

FREQUENCY MHz	GU <sub>max</sub> dB	GA <sub>max</sub> dB	S <sub>21</sub>   <sup>2</sup> dB	S <sub>12</sub>   <sup>2</sup> dB	K	Delay nsec	Mason's U dB	G1 dB	G2 dB
2000.0000	-18.01	-18.00	-37.95	-36.77	27.53	-0.027	-32.707	15.95	3.98
2500.0000	-15.58	-15.57	-34.65	-34.03	16.79	-0.001	-37.496	14.90	4.17
3000.0000	-14.62	-14.69	-32.43	-31.68	13.52	-0.015	-35.198	13.63	4.18
3500.0000	-13.19	-13.31	-30.17	-29.75	10.24	0.019	-36.355	12.79	4.19
4000.0000	-12.04	-12.23	-28.13	-28.14	8.39	0.019	-38.318	11.90	4.18
4500.0000	-10.79	-11.09	-26.37	-26.30	6.41	0.011	-39.156	11.45	4.13
5000.0000	-9.94	-10.33	-24.99	-24.83	5.35	0.011	-43.704	10.95	4.11
5500.0000	-8.97	-9.49	-23.51	-23.31	4.40	0.024	-41.071	10.45	4.09
6000.0000	-8.21	-8.84	-22.26	-22.06	3.82	0.028	-38.980	9.93	4.11
6500.0000	-7.41	-8.19	-21.17	-20.87	3.27	0.025	-36.002	9.66	4.09
7000.0000	-6.75	-7.66	-19.85	-19.67	2.94	0.029	-38.253	8.95	4.15
7500.0000	-6.16	-7.19	-18.62	-18.54	2.69	0.034	-44.914	8.11	4.35
8000.0000	-5.64	-6.76	-17.60	-17.59	2.48	0.041	-52.360	7.48	4.48
8500.0000	-5.17	-6.40	-16.82	-16.81	2.30	0.038	-43.933	6.94	4.71
9000.0000	-4.71	-6.06	-16.18	-16.03	2.11	0.041	-38.048	6.65	4.83
9500.0000	-4.13	-5.61	-15.56	-15.61	1.97	0.036	-45.414	6.36	5.07
10000.0000	-3.68	-5.31	-15.03	-14.94	1.83	0.035	-41.367	6.22	5.13
10500.0000	-2.85	-4.73	-14.41	-14.28	1.64	0.038	-36.934	6.34	5.22
11000.0000	-2.26	-4.30	-13.78	-13.72	1.52	0.039	-40.336	6.26	5.27
11500.0000	-1.68	-3.90	-13.20	-13.21	1.43	0.044	-41.533	6.28	5.25
12000.0000	-1.53	-3.82	-12.86	-12.82	1.41	0.049	-46.170	6.04	5.29
12500.0000	-1.29	-3.67	-12.68	-12.69	1.38	0.051	-40.248	6.14	5.25
13000.0000	-1.13	-3.65	-12.75	-12.71	1.37	0.041	-43.093	6.20	5.43
13500.0000	-0.94	-3.56	-12.88	-12.86	1.35	0.044	-43.034	6.27	5.68
14000.0000	-0.70	-3.47	-13.21	-13.13	1.33	0.039	-32.688	6.62	5.89
14500.0000	-0.17	-3.27	-13.51	-13.33	1.28	0.023	-31.483	7.15	6.19
15000.0000	0.15	-3.09	-13.65	-13.66	1.27	0.025	-40.622	7.39	6.42
15500.0000	0.09	-3.15	-13.95	-13.92	1.27	0.025	-38.265	7.51	6.52
16000.0000	-0.24	-3.31	-14.06	-14.00	1.30	0.024	-39.573	7.50	6.32
16500.0000	-0.48	-3.42	-14.06	-14.05	1.32	0.030	-46.013	7.22	6.35
17000.0000	-1.43	-4.00	-14.34	-14.24	1.44	0.028	-37.600	6.51	6.40
17500.0000	-2.60	-4.72	-14.76	-14.60	1.63	0.027	-33.228	5.85	6.31
18000.0000	-3.60	-5.38	-15.08	-15.09	1.87	0.024	-44.662	5.47	6.01

**S-PARAMETERS**

**MAG. AND ANG.**

**V<sub>DS</sub> = 0 V, V<sub>GS</sub> = -2.5 V**

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
2000.0000	0.993	-13.3	0.041	75.0	0.041	75.0	0.986	-15.4
2500.0000	0.987	-17.7	0.051	70.4	0.052	70.7	0.982	-19.9
3000.0000	0.982	-22.2	0.062	65.3	0.062	65.9	0.979	-24.7
3500.0000	0.978	-26.7	0.072	60.3	0.072	59.3	0.974	-29.7
4000.0000	0.975	-30.7	0.080	55.1	0.080	54.9	0.969	-34.6
4500.0000	0.970	-34.4	0.088	50.6	0.087	50.1	0.968	-39.2
5000.0000	0.968	-37.5	0.095	46.0	0.095	46.5	0.967	-43.4
5500.0000	0.965	-40.3	0.103	42.9	0.102	42.5	0.965	-47.5
6000.0000	0.966	-43.4	0.111	40.2	0.111	40.2	0.957	-50.8
6500.0000	0.963	-45.9	0.123	37.4	0.122	37.0	0.961	-54.9
7000.0000	0.959	-48.8	0.136	33.0	0.137	32.9	0.955	-59.3
7500.0000	0.947	-52.6	0.149	27.8	0.148	28.0	0.950	-63.5
8000.0000	0.944	-57.6	0.164	23.0	0.162	23.0	0.939	-68.5
8500.0000	0.939	-63.2	0.180	17.7	0.178	17.9	0.930	-74.1
9000.0000	0.928	-69.2	0.196	12.0	0.196	12.0	0.920	-80.4
9500.0000	0.922	-75.5	0.212	5.5	0.211	5.2	0.915	-87.9
10000.0000	0.913	-81.2	0.224	-1.0	0.224	-1.2	0.903	-95.8
10500.0000	0.912	-86.2	0.240	-7.0	0.239	-7.3	0.899	-104.5
11000.0000	0.913	-91.2	0.255	-13.1	0.257	-13.3	0.906	-111.8
11500.0000	0.909	-96.6	0.271	-19.6	0.273	-20.1	0.906	-119.1
12000.0000	0.904	-102.7	0.289	-27.3	0.288	-27.0	0.913	-126.6
12500.0000	0.905	-109.8	0.307	-34.7	0.305	-34.6	0.900	-134.7
13000.0000	0.897	-118.1	0.324	-43.7	0.324	-43.6	0.887	-143.4
13500.0000	0.884	-127.9	0.339	-53.8	0.338	-53.7	0.879	-153.5
14000.0000	0.869	-139.1	0.346	-64.3	0.343	-64.5	0.874	-164.8
14500.0000	0.868	-150.3	0.345	-76.4	0.345	-76.3	0.875	-177.8
15000.0000	0.866	-161.6	0.333	-88.1	0.334	-88.3	0.877	169.0
15500.0000	0.867	-172.6	0.311	-99.3	0.313	-98.7	0.882	156.9
16000.0000	0.872	177.4	0.294	-109.3	0.289	-109.7	0.897	146.1
16500.0000	0.885	166.6	0.269	-119.0	0.268	-119.1	0.905	136.8
17000.0000	0.870	153.6	0.251	-129.3	0.246	-129.4	0.926	128.7
17500.0000	0.871	139.7	0.226	-140.8	0.227	-140.2	0.927	122.1
18000.0000	0.855	124.6	0.198	-151.5	0.198	-152.4	0.923	115.3

AMPLIFIER PARAMETERS

V<sub>DS</sub> = 0 V, V<sub>GS</sub> = -2.5 V


FREQUENCY MHz	GU <sub>max</sub> dB	GA <sub>max</sub> dB	S <sub>21</sub>   <sup>2</sup> dB	S <sub>12</sub>   <sup>2</sup> dB	K	Delay nsec	Mason's U dB	G1 dB	G2 dB
2000.0000	6.59	-1.81	-27.69	-27.72	1.09	0.037	-41.579	18.66	15.62
2500.0000	4.66	-2.29	-25.78	-25.76	1.14	0.026	-37.612	15.91	14.53
3000.0000	4.16	-2.37	-24.10	-24.15	1.16	0.028	-32.931	14.46	13.79
3500.0000	3.77	-2.45	-22.90	-22.89	1.16	0.027	-30.070	13.70	12.97
4000.0000	3.27	-2.57	-21.96	-21.97	1.18	0.029	-46.684	13.12	12.12
4500.0000	3.06	-2.59	-21.12	-21.17	1.19	0.025	-36.484	12.23	11.95
5000.0000	3.35	-2.46	-20.43	-20.42	1.16	0.026	-36.357	11.96	11.82
5500.0000	3.47	-2.35	-19.76	-19.86	1.16	0.017	-32.225	11.57	11.66
6000.0000	3.33	-2.41	-19.10	-19.12	1.16	0.015	-46.847	11.70	10.73
6500.0000	4.33	-2.04	-18.22	-18.27	1.12	0.015	-34.379	11.37	11.18
7000.0000	4.16	-2.07	-17.36	-17.24	1.11	0.025	-30.925	10.93	10.58
7500.0000	3.50	-2.14	-16.54	-16.59	1.13	0.029	-37.284	9.90	10.14
8000.0000	3.26	-2.14	-15.68	-15.80	1.13	0.026	-31.894	9.67	9.28
8500.0000	3.09	-2.15	-14.91	-15.00	1.13	0.030	-33.177	9.30	8.70
9000.0000	2.57	-2.31	-14.16	-14.16	1.14	0.032	-60.851	8.60	8.13
9500.0000	2.64	-2.21	-13.47	-13.52	1.13	0.036	-37.108	8.25	7.87
10000.0000	2.13	-2.37	-13.01	-13.00	1.15	0.036	-47.342	7.79	7.36
10500.0000	2.50	-2.17	-12.40	-12.44	1.13	0.033	-36.990	7.72	7.18
11000.0000	3.39	-1.82	-11.86	-11.80	1.09	0.034	-33.577	7.81	7.45
11500.0000	3.74	-1.63	-11.33	-11.29	1.07	0.036	-31.606	7.62	7.45
12000.0000	4.38	-1.32	-10.79	-10.80	1.05	0.043	-33.886	7.37	7.79
12500.0000	4.37	-1.23	-10.26	-10.32	1.04	0.041	-33.321	7.42	7.22
13000.0000	4.00	-1.27	-9.79	-9.78	1.04	0.050	-40.261	7.08	6.71
13500.0000	3.67	-1.30	-9.38	-9.42	1.05	0.056	-36.338	6.61	6.44
14000.0000	3.15	-1.46	-9.22	-9.30	1.06	0.059	-31.349	6.12	6.25
14500.0000	3.16	-1.48	-9.24	-9.24	1.06	0.067	-48.824	6.09	6.31
15000.0000	2.83	-1.66	-9.54	-9.52	1.07	0.065	-38.005	6.02	6.35
15500.0000	2.44	-1.92	-10.14	-10.09	1.10	0.062	-31.130	6.05	6.53
16000.0000	2.65	-1.85	-10.64	-10.80	1.10	0.055	-27.440	6.21	7.08
16500.0000	2.64	-2.01	-11.41	-11.43	1.11	0.054	-47.034	6.65	7.40
17000.0000	2.61	-1.99	-12.01	-12.17	1.12	0.057	-28.001	6.14	8.48
17500.0000	1.77	-2.46	-12.90	-12.88	1.16	0.064	-33.848	6.18	8.49
18000.0000	-0.05	-3.35	-14.05	-14.06	1.31	0.059	-33.797	5.71	8.29

**NOISE PARAMETERS**


**$V_{DS} = 2\text{ V}$ ,  $I_D = 10\text{ mA}$**

Freq. (GHz)	NF <sub>min.</sub> (dB)	G <sub>a</sub> (dB)	Γ <sub>opt</sub>		R <sub>n</sub> /50
			MAG.	ANG.	
2.0	0.25	21.2	0.94	12	0.38
4.0	0.26	19.5	0.80	26	0.33
6.0	0.28	18.2	0.66	44	0.26
8.0	0.30	16.2	0.50	68	0.18
10.0	0.32	14.7	0.38	97	0.11
12.0	0.34	13.5	0.29	133	0.09
14.0	0.42	12.9	0.27	177	0.08
16.0	0.56	12.3	0.33	-129	0.11
18.0	0.72	11.9	0.39	-82	0.23

TYPICAL MOUNT PAD LAYOUT

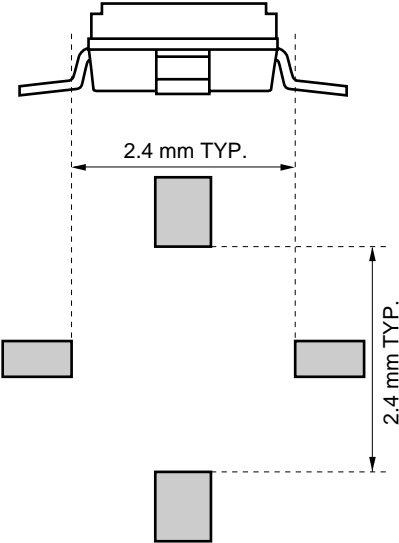

PACKAGE DIMENSIONS (Unit: mm)

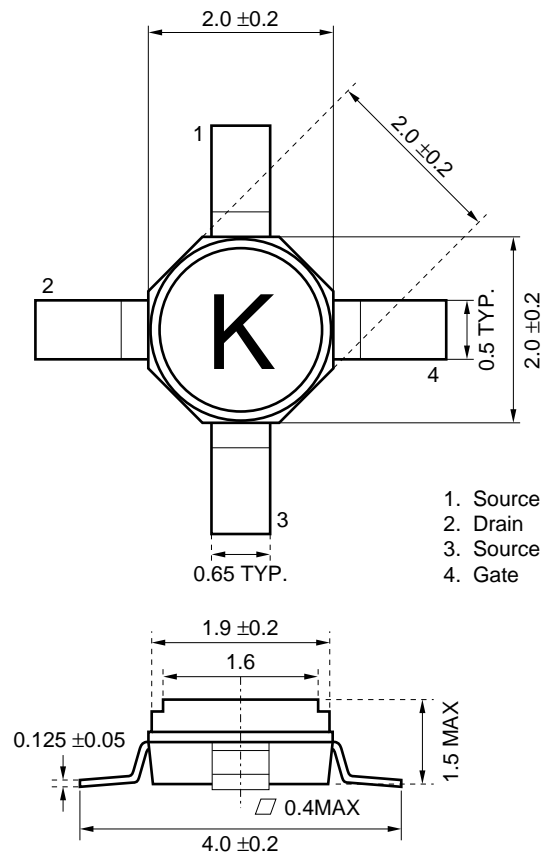

**RECOMMENDED SOLDERING CONDITIONS**

This product should be soldered under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your NEC sales representative.

Soldering Method	Soldering Conditions	Recommended Condition Symbol
Infrared Reflow	Package peak temperature: 230 °C or below Time: 30 seconds or less (at 210 °C) Count: 1, Exposure limit <sup>Note</sup> : None	IR30-00-1
Partial Heating	Pin temperature: 230 °C Time: 10 seconds or less (per pin row) Exposure limit <sup>Note</sup> : None	–

**Note** After opening the dry pack, keep it in a place below 25 °C and 65 % RH for the allowable storage period.

**Caution** Do not use different soldering methods together (except for partial heating).



[MEMO]

## CAUTION

**The Great Care must be taken in dealing with the devices in this guide.**

**The reason is that the material of the devices is GaAs (Gallium Arsenide), which is designated as harmful substance according to the law concerned.**

**Keep the law concerned and so on, especially in case of removal.**

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
  - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
  - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
  - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
  - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
  - NEC devices are classified into the following three quality grades:  
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
    - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
    - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
    - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF JFET Transistors](#) category:*

*Click to view products by [Renesas](#) manufacturer:*

Other Similar products are found below :

[XF1001-SC-EV1](#) [CE3514M4](#) [CE3514M4-C2](#) [CE3520K3-C1](#) [CE3521M4](#) [CE3521M4-C2](#) [CE3512K2-C1](#) [NPT25100B](#) [CE3520K3](#)  
[CGH55030F1](#) [CGH27030F](#) [QPD0020](#) [CGH25120F](#) [CMPA801B030F](#) [TGF2023-2-01](#) [TGF2023-2-02](#) [CGH40006P](#) [QPD1009](#) [MAGX-](#)  
[011086](#) [QPD1014SR](#) [T2G6000528-Q3](#) [CG2H40025F](#) [CGHV40200PP](#) [CGHV40050F](#) [CGHV14800F](#) [CGH27030P](#) [CGH09120F](#)  
[CG2H80015D-GP4](#) [CG2H40045F](#) [T2G4003532-FL](#) [TGF2942](#) [T2G6003028-FS](#) [T2G6000528-Q3 28V](#) [T2G4003532-FS](#) [T1G2028536-FL](#)  
[QPD1015](#) [QPD1010](#) [QPD1008L](#) [QPD1008](#) [QPD1000](#) [JANTXV2N4858](#) [ATF-521P8-BLK](#) [J175D26Z](#) [AGX-1/2](#) [CE3512K2](#) [2N3819](#)  
[CGH55030F2](#) [CGHV40180F](#) [CGHV27015S](#) [MMZ25332BT1](#)