

Category 6 Keystone Panel Mount Coupler (Shielded)



Category 6 Keystone Panel Mount Coupler Shielded (SACK3S, SACK3S-24)

Features

- Designed to fit US industry standard keystone mount outlets wall plates and patch panels
- RJ45 complies with FCC68
- High performance data throughput, meets Category 6 data transfer rates
- Operating temperature: ~40°C ~ +60°C
- Jack insertion life > 750 mating cycles
- Available as part of our innovative Panel Mount and D UNIVERSAL ranges

Packaging:

• Standard product is supplied in individual polythene bags. To save time for panel assemblers, SACK3S-24 is available as a "bulk pack" of 24 pieces without individual bags.


Specifications

- Materials:
 - Housing: Nickel plated zinc alloy Contacts: 50μ "/ 1.27µm gold plating over nickel plated phosphor bronze Earthing lug material: Stainless steel SUS304
- Weight: SACK3S: 18g approx.

SACK3S-24: 460g approx.

• Dimensions SACK3S: 29.7 x 17 x 16.1 mm approx.

SACK3S-24: 280 x 70 x 35mm approx.

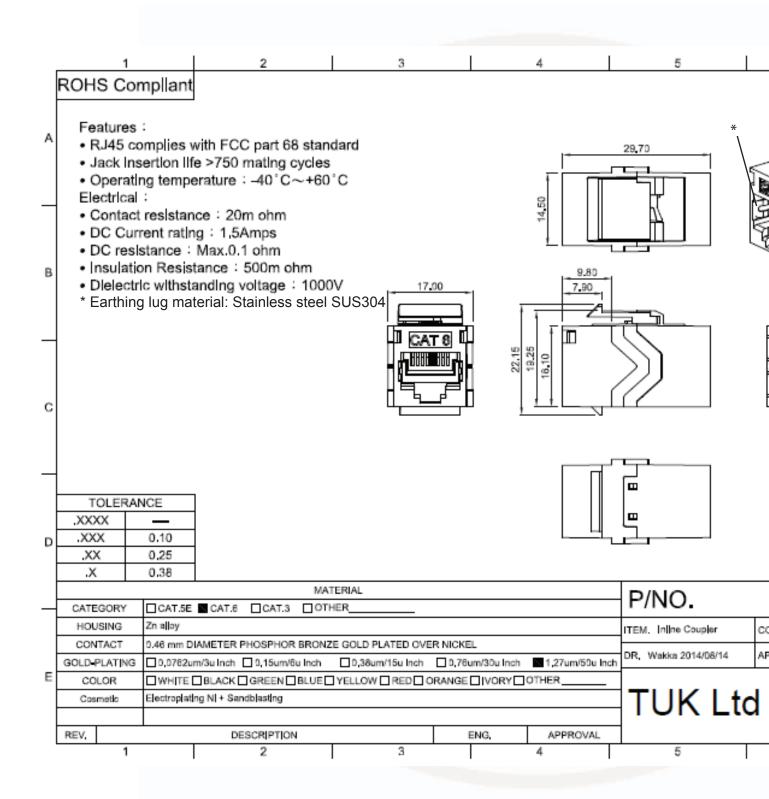

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for tuk manufacturer:

Other Similar products are found below :

SP0.5BL FJKPT SKMCBKDPM PXCAT6S8XL2 KRCAWHBKDPM SP3RD SP5RD OT45BK SP5YW SKFYW SP10GY TSY PXSPDY6S#100 PSPDY5#100 PSDL-6#20 WJOL F78BKB FACK2BKDPM FJP2 SKFBKDPM SPDL5BK SP10BK SKH1LJ PXSPDY5#10 PSDL-5#100 WJSG FJ445 SP2GN SP10GN SGKSSUPM SLJBKDPM SP10RD SILS SP5GN SGPZ10BK MGOP6 PXSPDY6#10 TRCSPDY3 SKH4 SGKSSU-45WH SP10BL SGPZ3BK ADF CPR2 SEKEI-45WH SGKH2 TRCSPDYBP SP10YW KPJ2BK KH2