

# rotronic

Datenblatt - Fiche technique - Data sheet


11.02.8322



**ROLINE USB 2.0 Sync- & Ladekabel  
für Apple Geräte mit Lightning Connector, 1,8 m**

**ROLINE Câble de charge et synchronisation  
pour appareils Apple à connecteur Lightning, 1,8 m**

**Lightning to USB Cable for iPhone, iPod, iPad, 1.8 m**

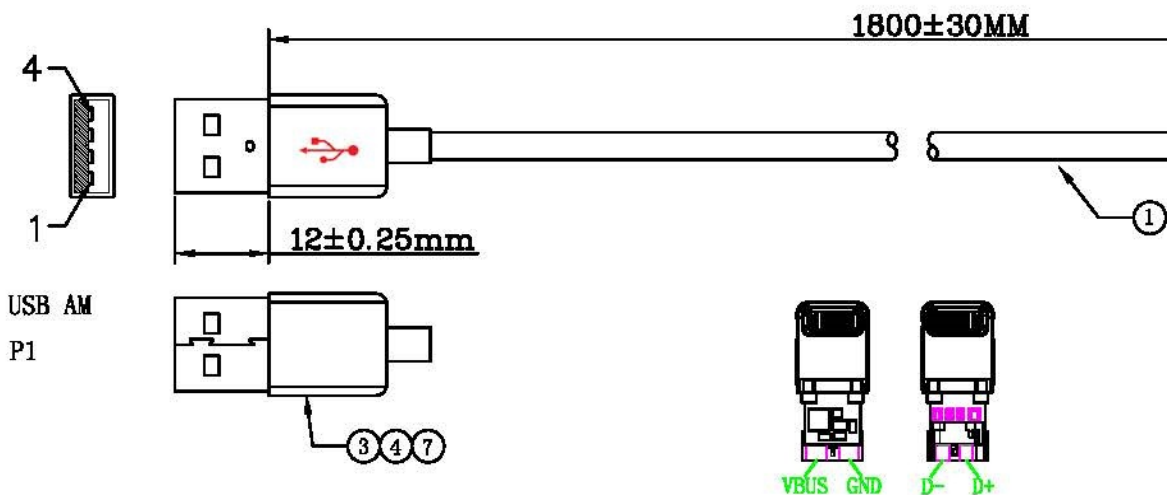

6.6  
9 8 7

Pin Assi

| REV.  | ECN. | TOLERANCE INCHES |
|-------|------|------------------|
| 1     |      | .X .015          |
| 2     |      | .XX .010         |
| 3     |      | .XXX .005        |
| 4     |      |                  |
| SHELL |      |                  |

| NO | Description  | Q'ty | unit |
|----|--|------|------|
| 9  | C48 pin connector black insulation, pin plated: tin  | 1    | pcs  |
| 8  | 15 C48 block head ABS snow white   | 1    | pcs  |
| 7  | 45P Apple snow white, PVC  | 5    | g    |
| 6  | 15 C48 one-piece   | 1    | pcs  |
| 5  | 15 C48 ABS shell snow white 17*10.4*5.9mm logo print: roline® (red 485C)   | 1    | pcs  |
| 4  | USB AM ABS shell snow white 14.5*17.9*7.15mm print: USB logo (red 485C)  | 1    | pcs  |
| 3  | USB AM connector L=18.1mm white insulation, shell plated: nickel (shell and pin4 short)                              | 1    | pcs  |
| 2  | Connector C48 Lightning MFI : MFI677-2166  | 1    | pcs  |
| 1  | non-U128(19/0.08TC)*2C #20(68/0.10TC 250D nylon)*1C+3E(19/0.05+250D)AB(16/9/0.06TC 95% TC) OD: 3.2mm snow white, PVC | 1.62 | m    |

| REV.  | ECN. | TOLERANCE INCHES |
|-------|------|------------------|
| 1     |      | .X .015          |
| 2     |      | .XX .010         |
| 3     |      | .XXX .005        |
| 4     |      |                  |
| SHELL |      |                  |

DRAWN BY ZHOUWENL  
CHECK BY  
APPD BY

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Cables / IEEE 1394 Cables category](#):*

*Click to view products by [Roline manufacturer](#):*

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [13805532](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [AC102012-2](#) [IP-USB1\(C10\)S-RW](#)  
[CABLE/RTP/USB/DT](#) [0847290003](#) [10115240-12200LF](#) [RS232-GTD](#) [USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [1689404-1](#) [FTP-](#)  
[629Y401](#) [FTP-628Y402](#) [943301-001](#) [FNY-W6022](#) [FNY-W6003-03](#) [1310-1015-05](#) [1310-1018-04](#) [1310-1019-04](#) [0887283402](#) [UA-](#)  
[30AMFM-SL7B02](#) [UA-30AMFM-SL7B01](#) [UA-30AFM-LD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [UES-1001A160](#) [UES-](#)  
[1003A160](#) [USBFTVX7SA2N20A](#) [USBFTVX2SA2N20A](#) [USBFTV2PEMSA2N10A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F\\*2 to 2.54](#)  
[2\\*5P-SH L=400mm](#) [EP-CBUSB10P2FLT](#) [1310-1033-01](#) [1310-1037-04](#) [ASR-USB](#) [68784-0075](#) [17-241361](#) [17-230471](#) [217B-BC02](#) [USB-29](#)  
[19800-010500-200-RS](#) [USB+MINI DIN 6P WITH BKT](#)