


SPECIFICATION CONTROL DRAWING

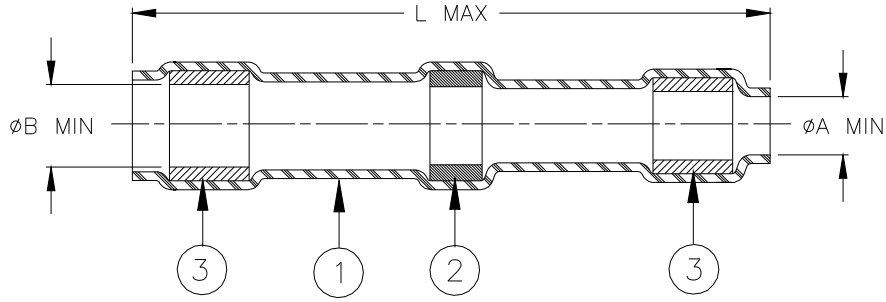

Product Revision		Product Dimensions			Wire Dimensions		CMA Range
Product Name		L max	øA min	øB min	øD		
					max	min	
D-1744-01	B	29.70 (1.170)	1.90 (0.075)	2.40 (0.095)	1.90 (0.075)	0.50 (0.020)	350 to 2000
D-1744-02	C	30.15 (1.187)	2.80 (0.110)	3.15 (0.125)	2.80 (0.110)	0.80 (0.030)	2000 to 4000
D-1744-03	B	29.60 (1.165)	4.60 (0.180)	5.10 (0.200)	4.57 (0.180)	1.30 (0.050)	4000 to 10000
D-1744-04	B	30.00 (1.180)	7.11 (0.280)	7.62 (0.300)	7.11 (0.280)	2.00 (0.080)	10000 to 13000


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
 SOLDER: TYPE Sn63 per ANSI/J-STD-006.
 FLUX: TYPE ROL1 per ANSI/J-STD-004.
 THERMAL INDICATOR: Violet
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: gray.

APPLICATION

- These parts are designed to provide an environment resistant in-line splice in wires having tin or silver-plated conductors and insulation rated for at least 125°C.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity/ Raychem-approved convection or infrared tools in accordance with TE Connectivity/ Raychem installation procedure RPIP-850-00.
- Assemblies will meet requirements of TE Connectivity / Raychem specification RT-1404 and National Aerospace Standard NAS-1744.

For best results, prepare the wire(s) as shown:

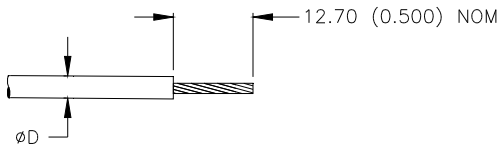

		TE Connectivity 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		TITLE: SOLDERSLEEVE WIRE SPLICE			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-1744-01/-02/-03/-04			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.:	DOC. ISSUE:	DATE:	
ROUGHNESS IN MICRON				SEE TABLE	6	15-Apr-11	
PREPARED BY: mforonda	DCR NUMBER: D040063	REPLACES: D030265	CAGE CODE :	SCALE:	SIZE:	SHEET:	
			06090	---	A	1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#)