




NTE5346 & NTE5348 Silicon Bridge Rectifier

Features:

- High Surge Current

Electrical Characteristics:

Maximum Repetitive Peak Reverse Voltage, P_{RV}	600V
Maximum DC Output Current ($T_C = +85^\circ\text{C}$), I_D	
NTE5346	80A
NTE5348	100A
Maximum Non-Repetitive Surge Current (1/2 Cycle, 60Hz), I_{TSM}	1500A
Maximum I^2t for Fusing ($t = 8.3\text{ms}$), I^2t9350A ² sec
Maximum Voltage Drop (at 100A Peak), V_F	1.2V
Operating Junction Temperature Range, T_J	-40°C to 125°C
Maximum Thermal Resistance (Per Chip), Junction-to-Case, R_{thJC}	0.3°C/W
Isolation Voltage, V_{ISOL}	2500V _{RMS}

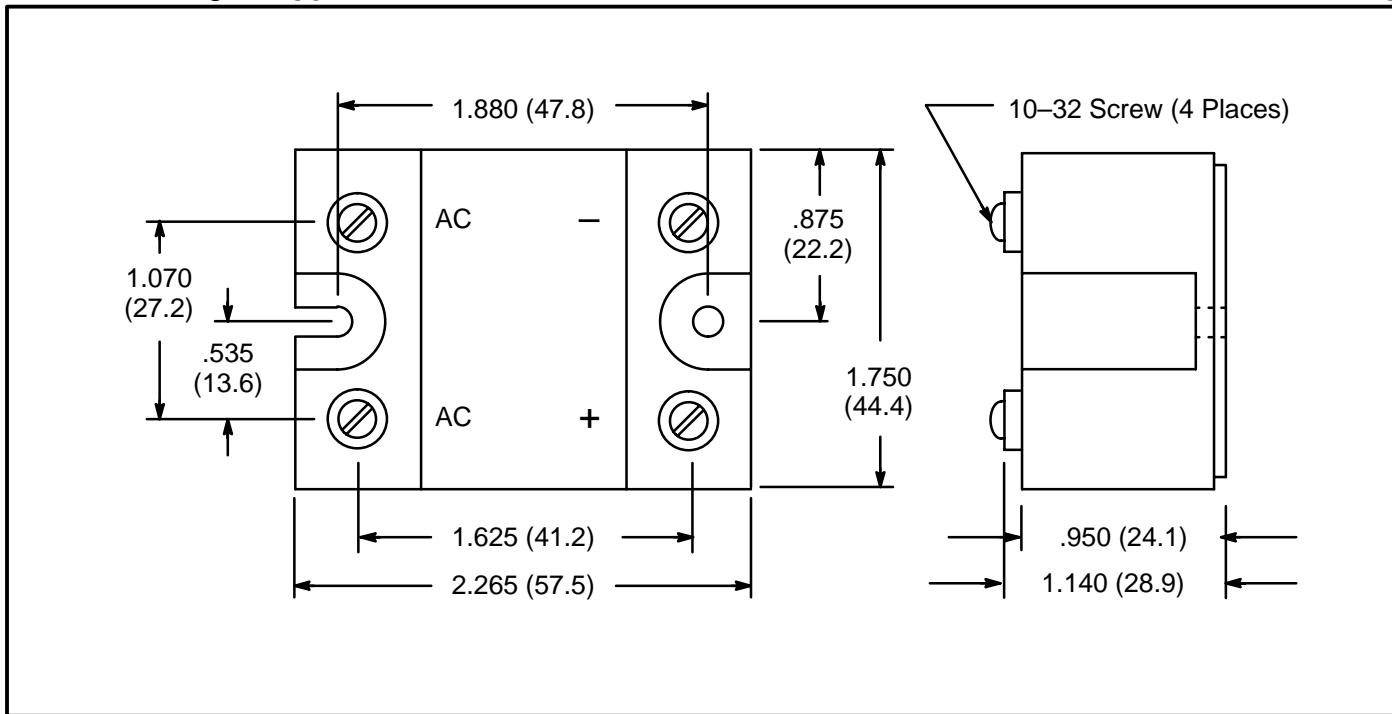

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [NTE manufacturer:](#)

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)