



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE968 Integrated Circuit 3-Terminal Positive Voltage Regulator, 15V

The NTE968 fixed-voltage regulator is a monolithic integrated circuit in a TO220 type package designed for use in a wide variety of applications including local, on-card regulation. This regulator employs internal current limiting, thermal shutdown, and safe-area compensation. With adequate heat-sinking it can deliver output currents in excess of 1.0 ampere. Although designed primarily as a fixed voltage regulator, this device can be used with external components to obtain adjustable voltages and currents.

Features:

- Output Current in Excess of 1.0 Ampere
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Input Voltage, V_{in}	35Vdc
Power Dissipation ($T_A = +25^\circ\text{C}$), P_D	Internally Limited
Derate above $+25^\circ\text{C}$	15.4mW/ $^\circ\text{C}$
Power Dissipation ($T_C = +25^\circ\text{C}$), P_D	Internally Limited
Derate above $+75^\circ\text{C}$	200mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient, R_{thJA}	65 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Case, R_{thJC}	5 $^\circ\text{C}/\text{W}$
Operating Junction Temperature Range, T_J	-55 $^\circ$ to +150 $^\circ\text{C}$
Storage Junction Temperature Range, T_{stg}	-65 $^\circ$ to +150 $^\circ\text{C}$


Electrical Characteristics: ($V_{in} = 23\text{V}$, $I_O = 500\text{mA}$, $T_J = 0^\circ$ to +125 $^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Output Voltage	V_O	$T_J = +25^\circ\text{C}$	14.4	15.0	15.6	V	
		$5\text{mA} \leq I_O \leq 1\text{A}$, $P_O \leq 15\text{W}$, $17.5\text{V} \leq V_{in} \leq 30\text{V}$	14.25	15.0	15.75	V	
Line Regulation	Reg_{line}	$T_J = +25^\circ\text{C}$, Note 1	$17.5\text{V} \leq V_{in} \leq 30\text{V}$	-	13	300	mV
			$20\text{V} \leq V_{in} \leq 26\text{V}$	-	6	150	mV
Load Regulation	Reg_{load}	$T_J = +25^\circ\text{C}$, Note 1	$5\text{mA} \leq I_O \leq 1.5\text{A}$	-	52	300	mV
			$250\text{mA} \leq I_O \leq 750\text{mA}$	-	20	150	mV

Note 1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

Electrical Characteristics (Cont'd): ($V_{in} = 23V$, $I_O = 500mA$, $T_J = 0^\circ$ to $+125^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Current	I_B	$T_J = +25^\circ C$	-	4.4	8.0	mA
Quiescent Current Change	ΔI_B	$17.5V \leq V_{in} \leq 30V$	-	-	1.0	mA
		$5mA \leq I_O \leq 1A$	-	-	0.5	mA
Ripple Rejection	RR	$18.5V \leq V_{in} \leq 28.5V$, $f = 120Hz$	-	58	-	dB
Dropout Voltage	$V_{in} - V_O$	$T_J = +25^\circ C$, $I_O = 1A$	-	2	-	V
Output Noise Voltage	V_n	$T_A = +25^\circ C$, $10Hz \leq f \leq 100kHz$	-	10	-	$\mu V/V_O$
Output Resistance	r_O	$f = 1kHz$	-	19	-	$m\Omega$
Short-Circuit Current Limit	I_{sc}	$T_A = +25^\circ C$, $V_{in} = 35V$	-	0.2	-	A
Peak Output Current	I_{max}	$T_J = +25^\circ C$	-	2.2	-	A
Average Temperature Coefficient of Output Voltage	TCV_O		-	-1.0	-	$mV/^\circ C$

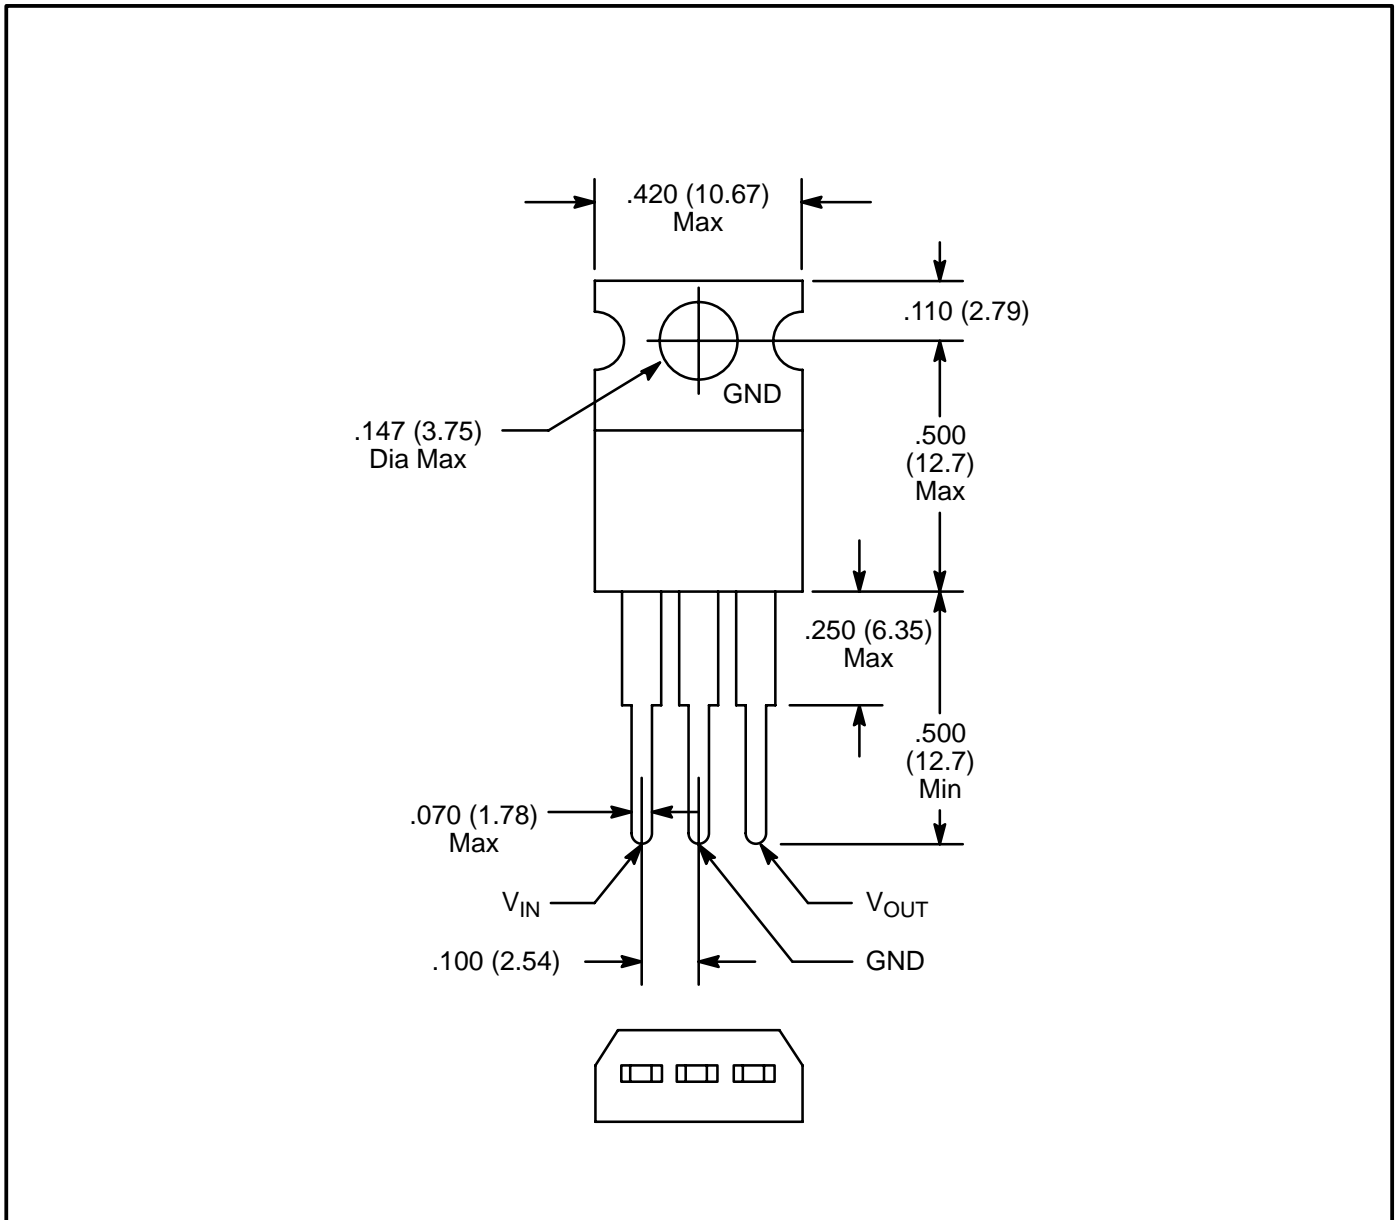

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [NTE manufacturer](#):

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MAX202ECWE-LF](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#)
[TCR3DF13,LM\(CT](#) [TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#)
[636416C](#) [NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#)