

NPN Medium Power Transistor (Switching)

UMT2222A/SST2222A/MMST2222A/RXT2222A/PN2222A

●Features

- 1) $BV_{CEO} < 40V$ ($I_C = 10mA$)
- 2) Complements the UMT2907A/SST2907A/MMST2907A /RXT2907A/PN2907A.

●Package, marking and packaging specifications

Type	UMT2222A	SST2222A	MMST2222A	RXT2222A	PN2222A
Package	UMT3	SST3	SMT3	MPT3	TO-92
Marking	R1P	R1P	R1P	CB*	—
Code	T106	T116	T146	T100	T93
Basic ordering unit (pieces)	3000	3000	3000	1000	3000


* Indicates lot number.

●Absolute maximum ratings ($T_a = 25^\circ C$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	75	V
Collector-emitter voltage	V_{CEO}	40	V
Emitter-base voltage	V_{EBO}	6	V
Collector current	I_C	0.6	A
Collector power dissipation	UMT2222A, SST2222AV, MMST2222A	0.2	W *
	SST2222A	0.35	
	RXT2222A	0.5	
	PN2222A	0.625	
Junction temperature	T_J	150	$^\circ C$
Storage temperature	T_{stg}	-55~150	$^\circ C$

* On 7 x 5 x 0.6 mm ceramic board

●External dimensions (Units : mm)

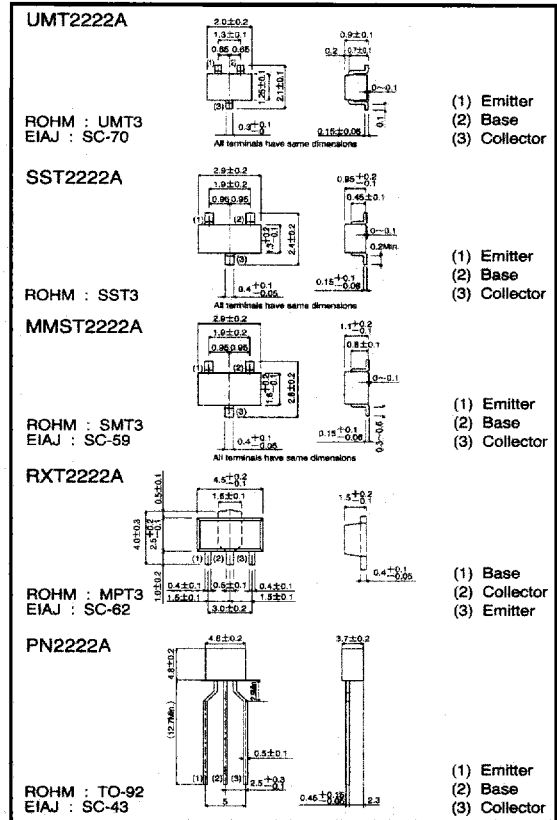

●Electrical characteristics ($T_a = 25^\circ C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV_{CBO}	75	—	—	V	$I_C = 10 \mu A$
Collector-emitter breakdown voltage	BV_{CEO}	40	—	—	V	$I_C = 10mA$
Emitter-base breakdown voltage	BV_{EBO}	6	—	—	V	$I_E = 10 \mu A$
Collector cutoff current	I_{CBO}	—	—	100	nA	$V_{CB} = 60V$
Emitter cutoff current	I_{EBO}	—	—	100	nA	$V_{EB} = 3V$
Collector-emitter saturation voltage	$V_{CE(SAT)}$	—	—	0.3	V	$I_C/I_B = 150mA/15mA$
		—	—	1	V	$I_C/I_B = 500mA/50mA$
Base-emitter saturation voltage	$V_{BE(SAT)}$	0.6	—	1.2	V	$I_C/I_B = 150mA/15mA$
		—	—	2	V	$I_C/I_B = 500mA/50mA$
DC current transfer ratio	h_{FE}	35	—	—	—	$V_{CE} = 10V, I_C = 0.1mA$
		50	—	—	—	$V_{CE} = 10V, I_C = 1mA$
		75	—	—	—	$V_{CE} = 10V, I_C = 10mA$
		50	—	—	—	$V_{CE} = 1V, I_C = 150mA$
		100	—	300	—	$V_{CE} = 10V, I_C = 150mA$
		40	—	—	—	$V_{CE} = 10V, I_C = 500mA$
Transition frequency	f_T	300	—	—	MHz	$V_{CE} = 20V, I_C = 20mA, f = 100MHz$
Output capacitance	C_{ob}	—	—	8	pF	$V_{CB} = 10V, f = 100kHz$
Emitter input capacitance	C_{ib}	—	—	25	pF	$V_{EB} = 0.5V, f = 100kHz$
Delay time	t_d	—	—	10	ns	$V_{CC} = 30V, V_{BE(OFF)} = 0.5V, I_C = 150mA, I_{B1} = 15mA$
Rise time	t_r	—	—	25	ns	$V_{CC} = 30V, V_{BE(OFF)} = 0.5V, I_C = 150mA, I_{B1} = 15mA$
Storage time	t_{stg}	—	—	225	ns	$V_{CC} = 30V, I_C = 150mA, I_{B1} = -I_{B2} = 15mA$
Fall time	t_f	—	—	60	ns	$V_{CC} = 30V, I_C = 150mA, I_{B1} = -I_{B2} = 15mA$

● Electrical characteristic curves

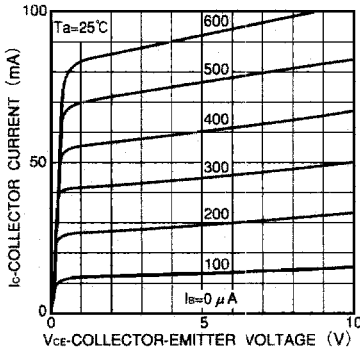


Fig.1 Grounded emitter output characteristics

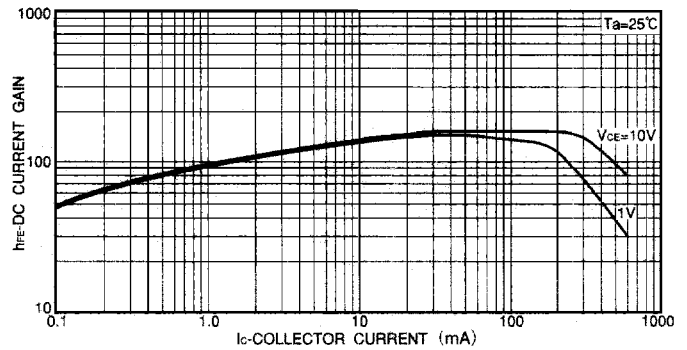


Fig.3 DC current gain vs. collector current (I)

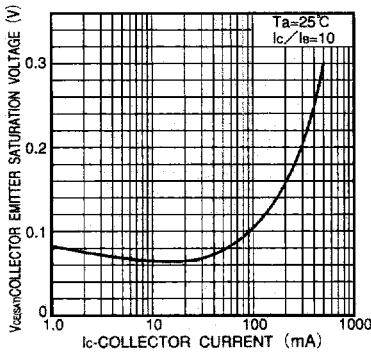


Fig.2 Collector-emitter saturation voltage vs. collector current

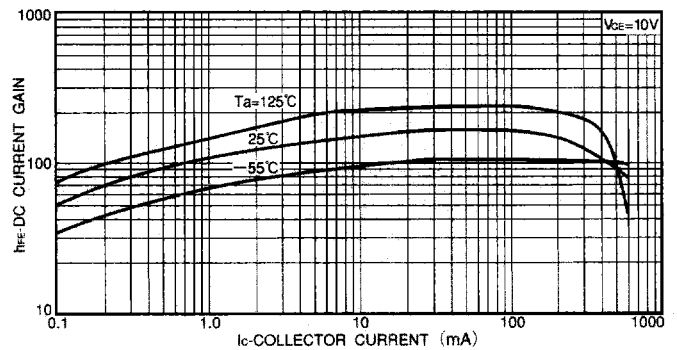


Fig.4 DC current gain vs. collector current (II)

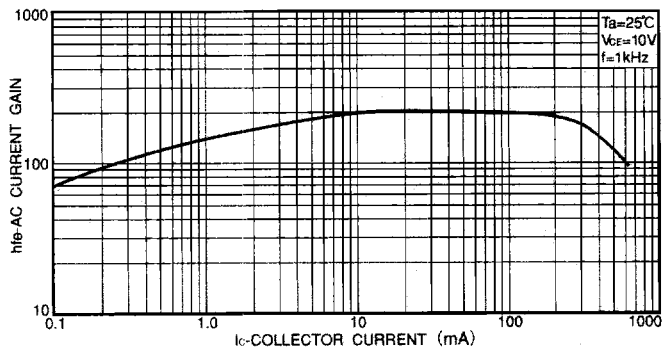


Fig.5 AC current gain vs. collector current

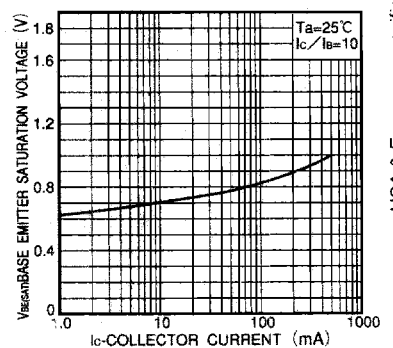


Fig.6 Base-emitter saturation voltage vs. collector current

USA & European specification models

● Electrical characteristic curves

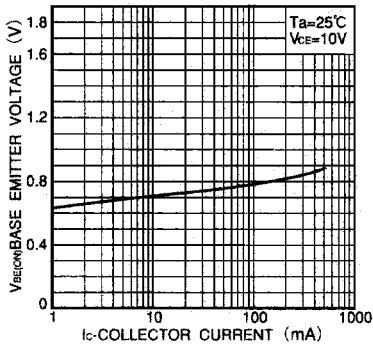


Fig. 7 Grounded emitter propagation characteristics

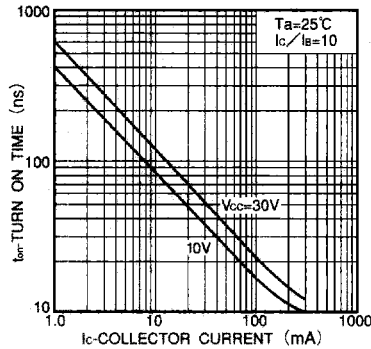


Fig. 8 Turn-on time vs. collector current

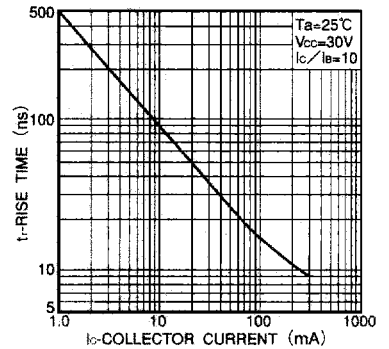


Fig. 9 Rise time vs. collector current

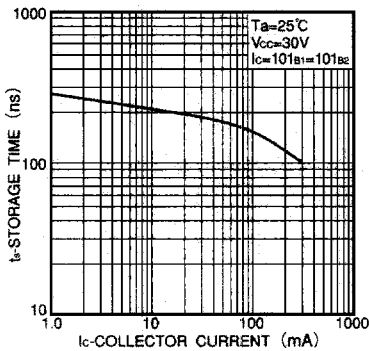


Fig. 10 Storage time vs. collector current

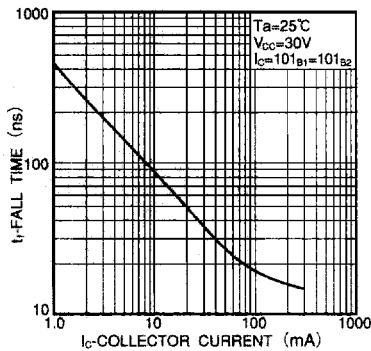


Fig. 11 Fall time vs. collector current

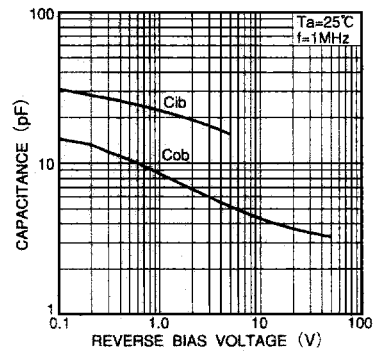


Fig. 12 Input/output capacitance vs. voltage

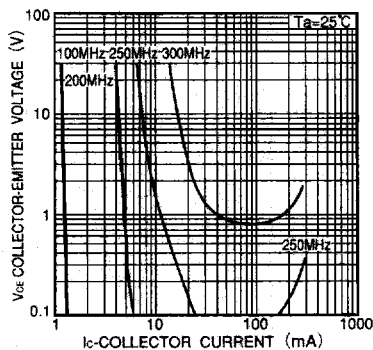


Fig. 13 Gain bandwidth product

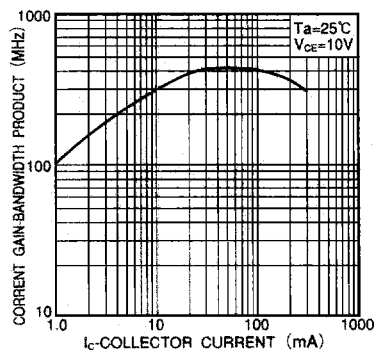


Fig. 14 Gain bandwidth product vs. collector current

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [ROHM manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)