



### ●Features

- 1) Bottom electrode configuration results in significantly greater compactness.
- 2) Fillet formation enables easy visibility after mounting.
- 3) Ideal for noise removal on power supply lines with limited space.
- 4) Eco-friendly halogen-free products.

### ●Dimensions

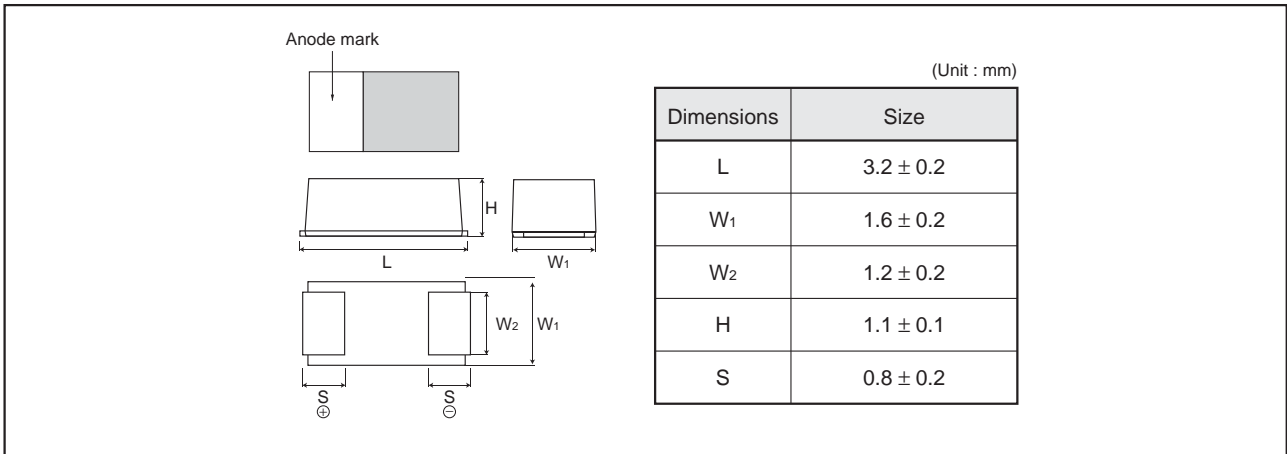

### ●Part No. Explanation

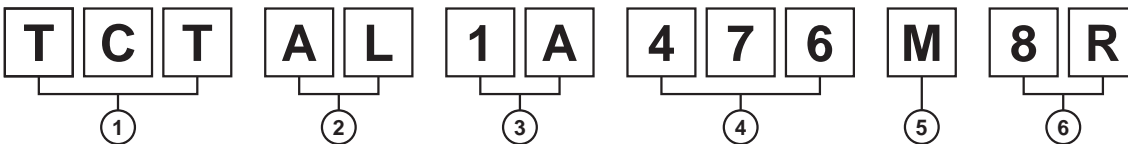

① Series name  
TCT

② Case style  
AL : 3216-12 (1206) size

③ Rated voltage

Rated voltage (V)	2.5	4	6.3	10	16	20	25	35
CODE	0E	0G	0J	1A	1C	1D	1E	1V

④ Nominal capacitance  
Nominal capacitance in pF in 3 digits:  
2 significant figures followed by the figure  
representing the number of 0's.

⑤ Capacitance tolerance  
M : ± 20%

⑥ Taping  
8 : Tape width  
R : Positive electrode on the side opposite to sprocket hole

\*This specification has possibility of charge, due to underdevelopment product.  
Please ask for latest specification to our sales.

●Rated table

(ESR : mΩ)

Capacitance (μF)	Rated voltage (V.DC)							
	2.5	4	6.3	10	16	20	25	35
1.0 (105)								☆AL
1.5 (155)								☆AL
2.2 (225)								☆AL
3.3 (335)								AL
4.7 (475)							AL	
10 (106)						AL		
15 (156)					AL	☆AL		
22 (226)					AL	AL		
33 (336)				AL	AL			
47 (476)				AL				
100 (107)		AL	AL	AL				
150 (157)		AL	AL					
220 (227)	AL	AL	AL					
330 (337)	AL							

Remark) Case size codes (AL) in the above show products line-up.

☆ Under development

●Marking

The indications listed below should be given on the surface of a capacitor.

- (1) Polarity : The polarity should be shown by □ bar. (on the anode side)
- (2) Rated DC voltage : A voltage code is shown as below table.
- (3) Capacitance : A capacitance code is shown as below table.

Visual typical example  
voltage code and capacitance code are variable with parts number.


[AL case]

EX.)  $\frac{A}{(1)} \frac{s}{(2)}$

(1) voltage code (2) capacitance code

Voltage Code	Rated DC Voltage (V)
e	2.5
g	4
j	6.3
A	10
C	16
D	20
E	25
V	35

Capacitance Code	Nominal Capacitance (μF)
A	1.0
J	2.2
N	3.3
S	4.7
a	10
e	15
j	22
n	33
s	47
ā	100
ē	150
ĵ	220
ñ	330

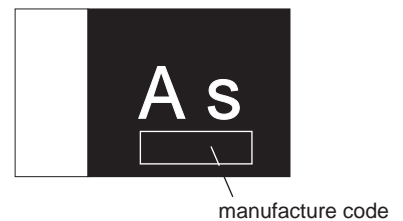

## ●Characteristics

Item		Performance	Test conditions (based on JIS C 5101-1 and JIS C 5101-3)															
Operating Temperature		-55°C to +125°C	Voltage reduction when temperature exceeds +85°C															
Maximum operating temperature with no voltage derating		+85°C																
Rated voltage (V.DC)		2.5   4   6.3   10   16   20   25   35	at 85°C															
Category voltage (V.DC)		1.6   2.5   4   6.3   10   13   16   22	at 125°C															
Surge voltage (V.DC)		3.2   5.0   8   13   20   26   32   44	at 85°C															
DC Leakage current		Shall be satisfied the value on " Standard list "	As per 4.9 JIS C 5101-1 As per 4.5.1 JIS C 5101-3 Voltage : Rated voltage for 5min															
Capacitance tolerance		Shall be satisfied allowance range. ±20%	As per 4.7 JIS C 5101-1 As per 4.5.2 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms +1.5V.DC Measuring circuit : DC Equivalent series circuit															
Tangent of loss angle (Df, tan δ)		Shall be satisfied the value on " Standard list "	As per 4.8 JIS C 5101-1 As per 4.5.3 JIS C 5101-3 Measuring frequency : 120±12Hz Measuring voltage : 0.5Vrms +1.5V.DC Measuring circuit : DC Equivalent series circuit															
Impedance		Shall be satisfied the value on " Standard list "	As per 4.10 JIS C 5101-1 As per 4.5.4 JIS C 5101-3 Measuring frequency : 100±10kHz Measuring voltage : 0.5Vrms or less Measuring circuit : DC Equivalent series circuit															
Resistance to Soldering heat	Appearance	There should be no significant abnormality. The indications should be clear.	As per 4.14 JIS C 5101-1 As per 4.6 JIS C 5101-3 Dip in the solder bath Solder temp : 260±5°C Duration : 5±0.5s Repetition : 1 After the specimens, leave it at room temperature for over 24h and then measure the sample.															
	L.C.	Less than initial limit																
	ΔC / C	Within ±20% of initial value AL0E337 : Within +20/-30% of initial value AL0J157 : Within +20/-30% of initial value AL0J227 : Within +20/-30% of initial value AL1A107 : Within +20/-30% of initial value																
	Df (tan δ)	Less than 200% of initial limit																
Temperature cycle	Appearance	There should be no significant abnormality. The indications should be clear.	As per 4.16 JIS C 5101-1 As per 4.10 JIS C 5101-3 Repetition : 5 cycles (1 cycle : steps 1 to 4) without discontinuation. <table border="1" data-bbox="901 1370 1206 1529"> <thead> <tr> <th></th> <th>Temp.</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-55±3°C</td> <td>30±3min.</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>3min. or less</td> </tr> <tr> <td>3</td> <td>125±2°C</td> <td>30±3min.</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>3min. or less</td> </tr> </tbody> </table> After the specimens, leave it at room temperature for over 24h and then measure the sample.		Temp.	Time	1	-55±3°C	30±3min.	2	Room temp.	3min. or less	3	125±2°C	30±3min.	4	Room temp.	3min. or less
		Temp.		Time														
	1	-55±3°C		30±3min.														
	2	Room temp.		3min. or less														
3	125±2°C	30±3min.																
4	Room temp.	3min. or less																
L.C.	Less than 200% of initial limit																	
ΔC / C	Within ±20% of initial value AL0E337 : Within ±30% of initial value AL0J157 : Within ±30% of initial value AL0J227 : Within ±30% of initial value AL1A107 : Within ±30% of initial value																	
Df (tan δ)	Less than 200% of initial limit																	
Moisture resistance	Appearance	There should be no significant abnormality. The indications should be clear.	As per 4.22 JIS C 5101-1 As per 4.12 JIS C 5101-3 After leaving the sample under such atmospheric condition that the temperature and humidity are 60±2°C and 90 to 95% RH, respectively, for 500±12h leave it at room temperature for over 24h and then measure the sample.															
	L.C.	Less than 200% of initial limit																
	ΔC / C	Within ±20% of initial value																
	Df (tan δ)	Less than 200% of initial limit AL0E337 : Less than 300% of initial limit AL0J157 : Less than 300% of initial limit AL0J227 : Less than 300% of initial limit AL1A107 : Less than 300% of initial limit																


Item	Performance	Test conditions (based on JIS C 5101-1 and JIS C 5101-3)
Temperature Stability	Temp.	-55°C
	$\Delta C / C$	Within 0/-15% of initial value
	Df (tan $\delta$ )	Shall be satisfied the voltage on " Standard list "
	L.C.	-
	Temp.	+85°C
	$\Delta C / C$	Within +15/0% of initial value
	Df (tan $\delta$ )	Shall be satisfied the voltage on " Standard list "
	L.C.	Less than 1000% of initial limit
	Temp.	+125°C
	$\Delta C / C$	Within +20/0% of initial value
Df (tan $\delta$ )	Shall be satisfied the voltage on " Standard list "	
L.C.	Less than 1250% of initial limit	
Surge voltage	Appearance	There should be no significant abnormality.
	L.C.	Less than 200% of initial value
	$\Delta C / C$	Within $\pm 20\%$ of initial value
	Df (tan $\delta$ )	Less than 200% of initial limit
Loading at High temperature	Appearance	There should be no significant abnormality.
	L.C.	Less than 200% of initial limit
	$\Delta C / C$	Within $\pm 20\%$ of initial value AL0E337 : Within +20/-30% of initial value AL0J157 : Within +20/-30% of initial value AL0J227 : Within +20/-30% of initial value AL1A107 : Within +20/-30% of initial value
	Df (tan $\delta$ )	Less than 200% of initial limit AL0E337 : Less than 300% of initial limit AL0J157 : Less than 300% of initial limit AL0J227 : Less than 300% of initial limit AL1A107 : Less than 300% of initial limit
Terminal strength	Capacitance	The measured value should be stable.
	Appearance	There should be no significant abnormality.
Adhesiveness		The terminal should not come off.

As per 4.29 JIS C 5101-1  
As per 4.13 JIS C 5101-3


As per 4.26 JIS C 5101-1  
As per 4.14 JIS C 5101-3  
Apply the specified surge voltage every 5±0.5 min. for 30±5 s. each time in the atmospheric condition of 85±2°C. Repeat this procedure 1,000 times.  
After the specimens, leave it at room temperature for over 24h and then measure the sample.

As per 4.23 JIS C 5101-1  
As per 4.15 JIS C 5101-3  
After applying the rated voltage for 2000+72/0 h without discontinuation via the serial resistance of 3Ω or less at a temperature of 85±2°C, leave the sample at room temperature / humidity for over 24h and measure the value.

As per 4.35 JIS C 5101-1  
As per 4.9 JIS C 5101-3  
A force is applied to the terminal until it bends to 1mm and by a prescribed tool maintain the condition for 5s.  
(See the figure below)



As per 4.34 JIS C 5101-1  
As per 4.8 JIS C 5101-3  
Apply force of 5N in the two directions shown in the figure below for 10±1s after mounting the terminal on a circuit board.




Item		Performance	Test conditions (JIS C 5101-1 and JIS C 5101-3)
Dimensions		Refer to "External dimensions"	Measure using a caliper of JIS B 7507 Class 2 or higher grade.
Resistance to solvents		The indication should be clear	As per 4.32 JIS C 5101-1 As per 4.18 JIS C 5101-3 Dip in the isopropyl alcohol for 30±5s, at room temperature.
Solderability		3/4 or more surface area of the solder coated terminal dipped in the soldering bath should be covered with the new solder.	As per 4.15.2 JIS C 5101-1 As per 4.7 JIS C 5101-3 Dip speed=25±2.5mm / s Pre-treatment (accelerated aging): Leave the sample on the boiling distilled water for 1 h. Solder temp. : 245±5°C Duration : 3±0.5s Solder : M705 Flux : Rosin 25% IPA 75%
Vibration	Capacitance	Measure value should not fluctuate during the measurement.	As per 4.17 JIS C 5101-1 Frequency : 10 to 55 to 10Hz/min. Amplitude : 1.5mm Time : 2h each in X and Y directions Mounting : The terminal is soldered on a print circuit board.
	Appearance	There should be no significant abnormality.	

### ●Standard products list


Part No.	Rated voltage 85°C (V)	Category voltage 125°C (V)	Surge voltage 85°C (V)	Cap. 120Hz (μF)	Tolerance (%)	Leakage current 25°C 1WV,5min (μA)	Df 120Hz (%)			Impedance 100kHz (Ω)
							-55°C	25°C 85°C	125°C	
TCT AL 0E 227 M8R	2.5	1.6	3.3	220	± 20	5.5	35	20	25	2.5
TCT AL 0E 337 M8R	2.5	1.6	3.3	330	± 20	16.5	80	30	40	2.5
TCT AL 0G 107 M8R	4	2.5	5.2	100	± 20	4	35	20	25	3
TCT AL 0G 157 M8R	4	2.5	5.2	150	± 20	6	35	20	25	2.7
TCT AL 0G 227 M8R	4	2.5	5.2	220	± 20	8.8	35	20	25	2.5
TCT AL 0J 107 M8R	6.3	4	8	100	± 20	6.3	34	18	24	3
TCT AL 0J 157 M8R	6.3	4	8	150	± 20	94.5	80	30	40	2.7
TCT AL 0J 227 M8R	6.3	4	8	220	± 20	280	80	30	40	2.5
TCT AL 1A 336 M8R	10	6.3	13	33	± 20	3.3	35	15	20	4
TCT AL 1A 476 M8R	10	6.3	13	47	± 20	4.7	35	20	25	4
TCT AL 1A 107 M8R	10	6.3	13	100	± 20	50	80	30	40	2.5
TCT AL 1C 156 M8R	16	10	20	15	± 20	2.4	30	15	20	4
TCT AL 1C 226 M8R	16	10	20	22	± 20	3.6	35	20	25	4
TCT AL 1C 336 M8R	16	10	20	33	± 20	5.3	35	20	25	4
TCT AL 1D 106 M8R	20	13	26	10	± 20	2	30	15	20	8
* TCT AL 1D 156 M8R	20	13	26	15	± 20	3	30	15	20	4
TCT AL 1D 226 M8R	20	13	26	22	± 20	4.4	35	20	25	4
TCT AL 1E 475 M8R	25	16	33	4.7	± 20	1.2	30	15	20	8
* TCT AL 1V 105 M8R	35	22	45	1	± 20	0.5	30	15	20	8
* TCT AL 1V 155 M8R	35	22	45	1.5	± 20	0.5	30	15	20	8
* TCT AL 1V 225 M8R	35	22	45	2.2	± 20	0.8	30	15	20	8
TCT AL 1V 335 M8R	35	22	45	3.3	± 20	1.2	30	15	20	8

\* = Under development

●Packaging specifications

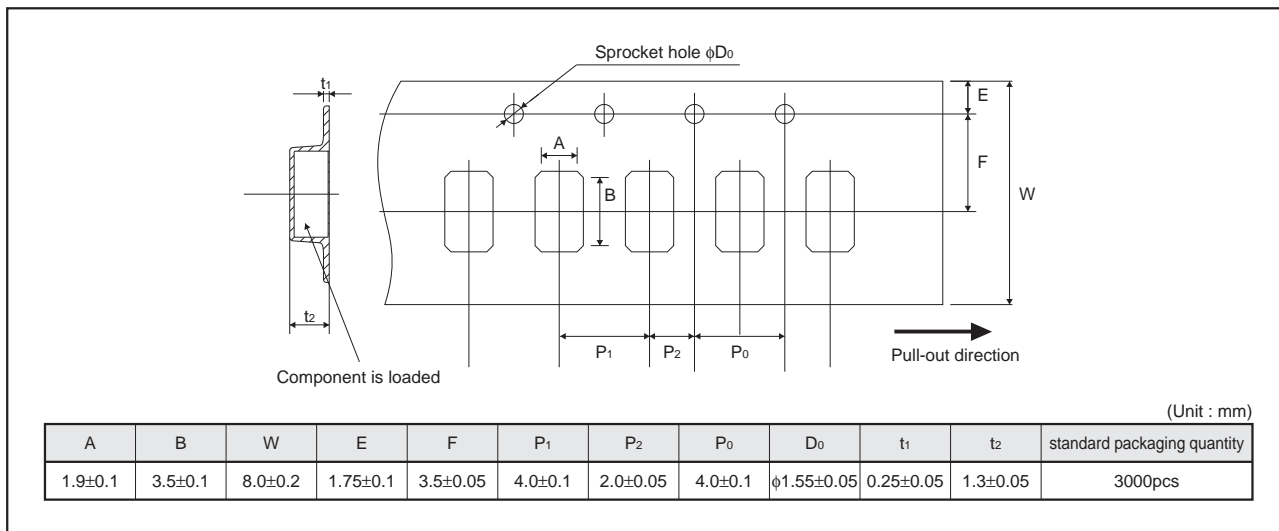

●Reel dimensions

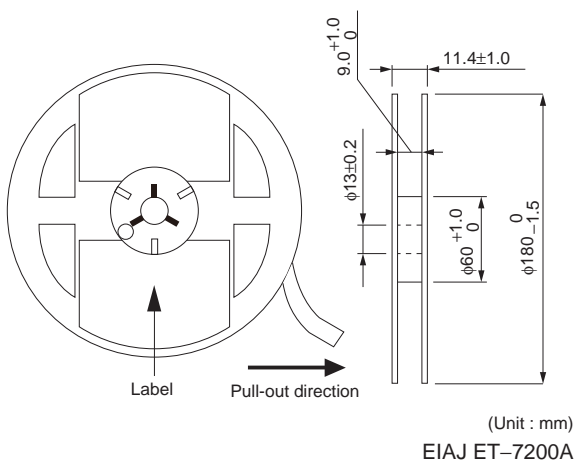

## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Tantalum Capacitors - Solid SMD category:](#)*

*Click to view products by [ROHM manufacturer:](#)*

Other Similar products are found below :

[CWR06HC106KB](#) [B45197-A2157-M509](#) [B45197A5226M409](#) [NTC-T476K10TRDF](#) [CWR06KC106KP](#) [CWR09KB106KCA](#)  
[TCSCS1A336KBAR](#) [TCTP0J336M8R](#) [B45196-H5106-K309](#) [B45196-H6226-K509](#) [CWR09JC225JBB](#) [T83D475K050RCCL](#)  
[TCSCS1A476KBAR](#) [T83E107K016RCCL](#) [T83D685K035RCCL](#) [595D107X0004B2T](#) [CWR11HH105KB](#) [293D155X9020A2DE3](#)  
[CWR09NC224KB](#) [CWR11MC685KCB](#) [CWR29FC685KCEC](#) [CWR09NC684KM](#) [CWR19MH106KCHB](#) [CWR29HH155KCBB](#)  
[CWR29FC336KDGC](#) [CWR09NC225KDB](#) [CWR29FC475KDDC](#) [CWR29HC225KCAC](#) [CWR11KC106KBB](#) [CWR09JH105KC](#)  
[293D476X9035E2TE3](#) [CWR29JC335KDDC](#) [CWR29KC226JCGC](#) [CWR29FC105KDAC](#) [CWR29DC337KCHC](#) [NTC-T686K6.3TRBF](#)  
[595D686X9010B2T](#) [595D106X0025C8T](#) [TAZH685K035LBSB0824](#) [TAZG107K010LBSB0800](#) [TAZH475K050LBSB0H23](#)  
[TAJD107K016KNJ](#) [TAZH227K010LBSB0024](#) [TAZH156K025CBSZ0824](#) [TAZH227J010LBSZ0800](#) [TPSE687M006H0045](#)  
[TBJD156K025CBSZ0824](#) [TMCSA1V154MTRF](#) [TMCSA0G335MTRF](#) [TMCSB1C335MTRF](#)