

ATEX Torch

Zones: 1, 2, 21 and 22





Product Overview

The ATEX Safety Torch is a reliable, simple and cost effective portable light and is available with a straight or right-angle body style and vacuum or xenon bulbs and is CE marked to the ATEX directive and IECEx certified for safe use in Zones 1 and 2 potentially explosive gas, vapour and mist atmosphere, where a T6 or T4 class permits, and Zones 21 and 22 dust atmospheres, with certified maximum surface temperatures of 65° C or 95° C.

T4 models give outstanding light output using advanced, long life xenon bulbs, set in a high quality parabolic reflector, coupled with alkaline cell approval, giving up to 12 hours of light output. Alternatively T6 allows use in any Zone 1 or 2 atmospheres, with optimum light output in this temperature class, and a 5 hour duration.

The compact torch design has a high-grip ergonomic form with easy single-handed switching, even with gloved hands. The torch body offers high strength, and proven impact resistance even at sub zero temperatures, using carefully selected thermoplastic resins with excellent chemical resistance. Additionally, the rubber armoured lens ring and end cap give enhanced grip and shock protection. The lens is scratch and chemical resistant.

The torch is sealed dust tight and protected from water immersion, with a certified IP67 enclosure. Right angle models incorporate a replaceable high strength thermoplastic belt clip for hands free use. Both models allow straightforward battery and bulb replacement, a spare bulb is fitted in the bulbholder for quick and convenient replacement. All models are supplied with wrist straps and clip rings.

Features & Benefits

- T6 and T4 models
- Simple, robust design
- Ultimate light output
- High energy alkaline cell certified
- ATEX explosive gas and dust approval
- IECEx Scheme certified

Certifications




Product Reference		TS-26B	TR-26B	TS-24B	TR-24B	
Product Description		Safety Torch, Primary Cell Powered, Straight or Right-Angle				
		Straight	Right-Angle	Straight	Right-Angle	
Code		II 2GD Ex eb ib IIB T6 Gb Ex tb IIIC T65°C Db (-10°C ≤ Ta ≤ +40°C)	II 2GD Ex eb ib IIB T6 Gb Ex tb IIIC T65°C Db (-20°C ≤ Ta ≤ +40°C)	II 2GD Ex eb ib IIB T4 Gb Ex tb IIIC T95°C Db (-10°C ≤ Ta ≤ +40/55°C)	II 2GD Ex eb ib IIB T4 Gb Ex tb IIIC T95°C Db (-20°C ≤ Ta ≤ +40/55°C)	
Type of Protection		Increased safety, intrinsic safety				
Area of Class (Gas)		Zones 1 & 2 Gas Groups IIA, IIB				
Max Surface Temp (Gas)		T6		Τ4		
Ambient Temp. (Gas)		-10°C to +40°C	-20°C to +40°C	-10°C to +40°C/+55°C*	-20°C to +40°C/+55°C*	
Area of Class (Dust)		Zones 21 and 22 Dust Groups IIIA, IIIB, IIIC				
Temp. Class (Dust)		65°C		95°C		
Certificate		BAS02ATEX2220X / IECEx BAS 15.0033X				
Enclosure		Impact Resistant Thermoplastic, Electrostatic Non-hazardous				
Lens		Toughened Glass				
Beam Type			Mediu	ım Spot		
Light Source:	Part No.	TP-406		TP-404		
	Bulb Type	Vacuum Filament		Xenon Filled Filament		
	Rating	2.4V, 0.5A		2.4V, 0.7A		
	Output	11.4 lm (at nom voltage)		16 lm (at nom voltage)		
	Life	15 hrs		50 hrs		
	Spare	TP-406		TP-404		
Power Source:	Part No.	2 x T-20 (R20)		2 x H-20 (LR20)		
	Type R20 Primary Cells to IEC60086		ells to IEC60086	R20/LR20 Primary Cells to IEC60086		
	Volts	2 x	1.5v	2 x	1.5v	
	1					

Light Duration	Up to 5 hrs		Up to 12 hrs		
Ingress Protection	IP67				
Weight (excl. cells)	150g	190g	150g	190g	
Weight (inc. cells)	350g	390g	450g	490g	


- *Dependent on battery selection.
- All information has been gathered under laboratory conditions, the user must regard the values given as approximate.
- Changes may be made to the above specification without notification, details are available on request.

Product Dimensions

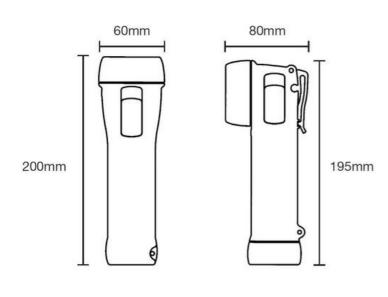

Light Output

- TS-26B & TR-26B 1.2W Beam (approx 5°) Peak luminous intensity at 5m 170lux
- TS-24B & TR-24B 1.7W Beam (approx 5°) Peak luminous intensity at 5m 230lux

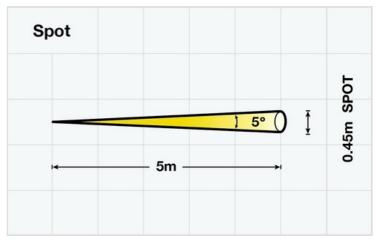

Version: SL013 DF418 Issue 11



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for wolf manufacturer:

Other Similar products are found below :

<u>M-20</u>