

MULTI-FUNCTION M18 SENSORS



- *Wide versatility of optic functions and connections*
- *High operating distances for all functions*
- *Models with trimmer adjustment and stability LED*
- *Rugged and impermeable plastic housing*



S5 SERIES

The **S5** series offers the most complete range of plastic tubular M18 photoelectric sensors.

The most varied optic functions can be chosen amongst the fixed focus or diffuse proximity models with short, medium or long operating distances reaching 60 cm; the 4 m retroreflex, 3 m polarised retroreflex and 1 m for detection of transparent materials; the 12 m through beam and models with optic fibre connection.


Different versions with either axial or radial optics are available. The series offers connector or cable connection, with 3 wires Vac or Vdc, or with 4 wires Vdc with complete configuration of the NPN/PNP output and dark/light mode.

A red LED indicating the output status is visible on the bottom side of the sensor.

The versions with trimmer adjustment present also a green LED signalling the switching stability according to the received signal's intensity.








The rugged ABS housing always guarantees IP67 protection.

TECHNICAL DATA

Power supply:	10 ... 30 Vdc (d.c. vers.), reverse polarity protection 15 ... 264 Vac (a.c. vers.)
Consumption:	30 mA max. (d.c. vers.) 10 mA max. (a.c. vers.)
Light emission:	infrared LED 880 nm red LED 660 nm (B, E1 vers.)
Diffuse proximity operating distance:	1 ... 10 cm (C10 vers.) 1 ... 35 cm (C35 vers.) 1 ... 60 cm (C60 vers.)
Limited proximity operating distance:	2 ... 15 mm (L2 vers.)
Fixed focus operating distance:	15 mm with 1 mm spot (D15 vers.)
Retroreflex operating distance:	0.1 ... 4 m (on R2)
Polarised retroreflex operating distance:	0.1 ... 3 m (on R2)
Retroreflex for transparents op. distance:	0.1 ... 0.8 m (on R2)
Through beam operating distance:	0 ... 12 m
Operating distance with optic fibres:	22 mm proximity (with OF-18-ST) 85 mm through beam (with OF-19-ST) <i>refer to OF series for other fibres</i>
Setting:	sensitivity trimmer (A, C8, D15, L2, G vers. excluded)
Indicators:	red OUTPUT LED green STABILITY LED (d.c. vers.) red POWER LED (G vers.)
Output type:	NPN or PNP configurable (d.c. vers.) SCR + bridge rectifier (a.c. vers.)
Saturation voltage:	2.5 V max. (vers. d.c.)
Output current:	150 mA max. (vers. d.c.), short-circuit prot. 100 mA max. (vers. a.c.)
Response time:	1 ms max. 2 ms (F vers. in d.c.) 20 ms max. (c.a. vers.)
Switching frequency:	500 Hz max. 250 Hz max. (F vers. in d.c.) 25 Hz max. (a.c. vers.)
Operating mode:	dark/light (configurable in 4 wires d.c. vers.)
Auxiliary functions:	'test +' and 'test -' inputs (G vers. in c.c.)
Connection:	4-pole M12 connector or 2 m Ø 5 mm cable
Electrical protection:	class 1 (vers. a.c.) class 2 (vers. d.c.)
Mechanical protection:	IP67
Housing material:	ABS
Lens material:	PMMA plastic
Weight:	25 g max. (connector vers.) 100 g max. (cable vers.)
Operating temperature:	-25 ... +55°C
Storage temperature:	-25 ... +70°C
Reference standard:	EN 60947-5-2
Certifications:	CE (c  us vers.d.c.)

The operating distances indicate the detection distance with excess gain 2.

DETECTION DIAGRAMS

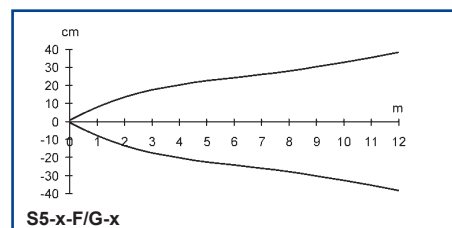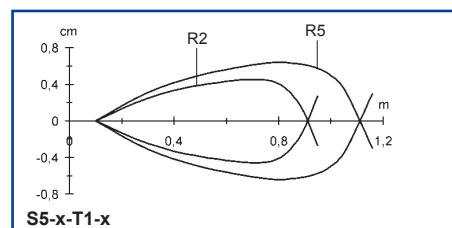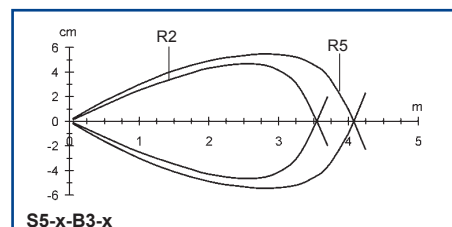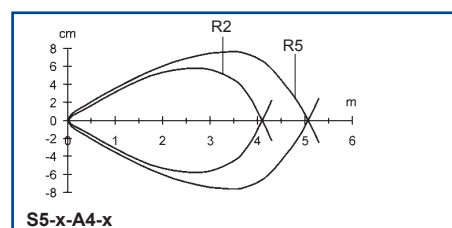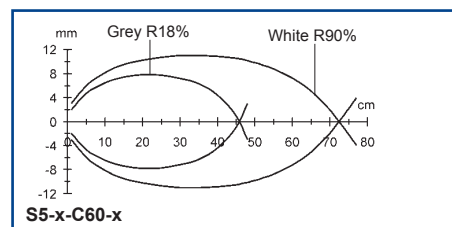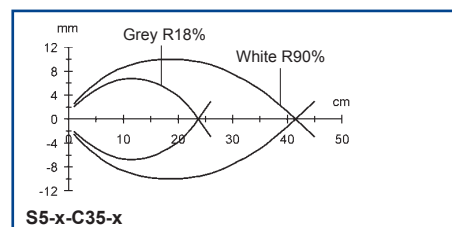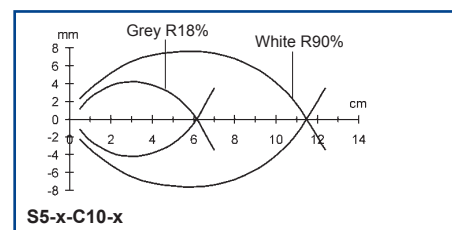

The detection diagrams indicate the typical operating distance with excess gain 1.

mm

MODELS

	AXIAL OPTIC VERSIONS		RADIAL OPTIC VERSIONS	
4 WIRE CONNECTION				
10 - 30 Vdc	4 POLE CABLE	M12 CONN.	4 POLE CABLE	M12 CONN.
Short distance	S5-5-C10-30	S5-5-C10-32	S5-5-C8-35	S5-5-C8-37
diffuse proximity	(G5210530)	(G5210532)	(G5210535)	(G5210537)
Medium distance	S5-5-C35-30	S5-5-C35-32	S5-5-C30-35	S5-5-C30-37
diffuse proximity	(G5210630)	(G5210632)	(G5210635)	(G5210637)
Long distance	S5-5-C60-30	S5-5-C60-32	S5-5-C60-35	S5-5-C60-37
diffuse proximity	(952051640)	(952051650)	(952051660)	(952051670)
Fixed focus proximity	S5-5-D15-30	S5-5-D15-32	S5-5-D15-35	S5-5-D15-37
	(G5210430)	(G5210432)	(G5210435)	(G5210437)
Retroreflex	S5-5-A4-30	S5-5-A4-32	S5-5-A2-35	S5-5-A2-37
	(G5210230)	(G5210232)	(G5210235)	(G5210237)
Polarised	S5-5-B3-30	S5-5-B3-32	S5-5-B1,5-35	S5-5-B1,5-37
Retroreflex	(G5210730)	(G5210732)	(G5210735)	(G5210737)
Retroreflex for	S5-5-T1-30	S5-5-T1-32	-	-
transparents	(952051680)	(952051690)		
Through beam receiver	S5-5-F12-30	S5-5-F12-32	S5-5-F8-35	S5-5-F8-37
	(G5210130)	(G5210132)	(G5210135)	(G5210137)
Through beam emitter	S5-5-G12-00	S5-5-G12-02	S5-5-G8-05	S5-5-G8-07
	(G5210000)	(G5210002)	(G5210005)	(G5210007)
Fibre optic	S5-5-E1-30	S5-5-E1-32	-	-
amplifier	(G5210830)	(G5210832)		
3 WIRE CONNECTION				
10 - 30 Vdc	M12 CONN. - NPN	M12 CONN. - PNP	M12 CONN. - NPN	M12 CONN. - PNP
Diffuse proximity	S5-5-C35-72	S5-5-C35-92	S5-5-C30-77	S5-5-C30-97
light mode	(G5210672)	(G5210692)	(G5210677)	(G5210697)
Limited proximity	S5-5-L2-72	S5-5-L2-92	S5-5-L2-77	S5-5-L2-97
light mode	(G5210972)	(G5210992)	(G5210977)	(G5210997)
Retroreflex	S5-5-A4-62	S5-5-A4-82	S5-5-A2-67	S5-5-A2-87
dark mode	(G5210262)	(G5210282)	(G5210267)	(G5210287)
Retroreflex	S5-5-A4-72	S5-5-A4-92	S5-5-A2-77	S5-5-A2-97
light mode	(G5210272)	(G5210292)	(G5210277)	(G5210297)
Through beam receiver	S5-5-F12-62	S5-5-F12-82	S5-5-F8-67	S5-5-F8-87
dark mode	(G5210162)	(G5210182)	(G5210167)	(G5210187)
Through beam emitter	use 4 wire 10 - 30 Vdc models		use 4 wire 10 - 30 Vdc models	
3 WIRE CONNECTION				
15 - 264 Vac	CABLE - dark mode	CABLE - light mode	CABLE - dark mode	CABLE - light mode
Short distance	S5-1-C8-10	S5-1-C8-20	S5-1-C8-15	S5-1-C8-25
diffuse proximity	(G5110510)	(G5110520)	(G5110515)	(G5110525)
Medium distance	S5-1-C30-10	S5-1-C30-20	S5-1-C30-15	S5-1-C30-25
diffuse proximity	(G5110610)	(G5110620)	(G5110615)	(G5110625)
Fixed focus proximity	S5-1-D15-10	S5-1-D15-20	-	-
	(G5110410)	(G5110420)		
Retroreflex	S5-1-A2-10	S5-1-A2-20	S5-1-A2-15	S5-1-A2-25
	(G5110210)	(G5110220)	(G5110215)	(G5110225)
Through beam receiver	S5-1-F8-10	S5-1-F8-20	S5-1-F8-15	S5-1-F8-25
	(G5110110)	(G5110120)	(G5110115)	(G5110125)
Through beam emitter	S5-1-G8-00 (G5110000)		S5-1-G8-05 (G5110005)	

ACCESSORIES

MODEL	DESCRIPTION	CODE N°
SP-40	fixed support for tubular M18 sensors	95ACC1370
SWING-18	adjustable support for plastic tubular M18 sensors	895000006

Please refer also to **Sensor Accessories**

Distributed by:

	<p>HEADQUARTERS</p> <p>INDUSTRIE ELETTRONICHE SENSOR S.p.A. via Lavino, 265 - 40050 Monte San Pietro, BO - Italy Tel. +39-051-6765611 • Fax +39-051-6759324 http://www.sensor.it • e-mail: headquarters@sensor.it</p> <p><small>IES SpA endeavours to continuously improve and renew its products; for this reason the technical data and contents of this catalogue may undergo variations without prior notice. For correct installation and use IES SpA can guarantee only the data indicated in the instruction manual supplied with the products.</small></p>
--	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [datasensor](#) manufacturer:

Other Similar products are found below :

[S5-5-E1-30](#) [S5-1C8-20](#) [S50-PA-5-C01-PP](#) [S51-PA-2-A00-PK](#) [S51-PA-2-C10-PK](#) [S15-PA-2-A00-NK](#) [S5-5C35-30](#) [S51-PA-2-A00-NK](#)