

500kHz, Rail-to-Rail I/O CMOS Operational Amplifier

FEATURES

- **GAIN BANDWIDTH:** 500kHz
- **RAIL-TO-RAIL INPUT AND OUTPUT**
0.8mV Typical Vos
- **INPUT VOLTAGE RANGE:** -0.1V to +5.6V
with Vs = 5.5V
- **SUPPLY RANGE:** +1.8V to +5.5V
- **SPECIFIED UP TO +125°C**
- **MicroSIZE PACKAGES:** TDFN2x2-6

DESCRIPTION


The RS221B families of products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (500kHz) and slew rate of 0.18V/us. The op-amps are unity gain stable and feature an ultra-low input bias current.

The devices are ideal for sensor interfaces, active filters and portable applications.

APPLICATIONS

- **SENSORS**
- **PHOTODIODE AMPLIFICATION**
- **ACTIVE FILTERS**
- **TEST EQUIPMENT**
- **DRIVING A/D CONVERTERS**

PIN CONFIGURATIONS

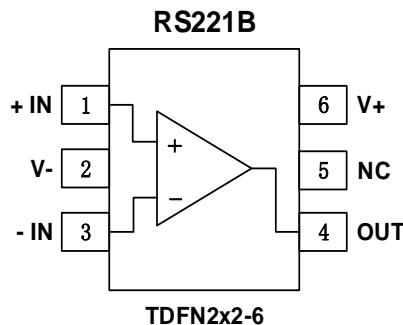

Note: NC indicates no internal connection

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Supply Voltage, V+ to V-.....	7.0V
Input Terminals, Voltage ⁽²⁾	- 0.5 to (V+) + 0.5V
Current ⁽²⁾	±10mA
Storage Temperature	-65°C to +150°C
Operating Temperature	-40°C to +125°C
Junction Temperature.....	150°C
Package Thermal Resistance @ TA = +25°C	
TDFN2x2-6.....	200°C/W
MSOP-10, SOIC-8	150°C/W
SOIC-14, TSSOP-14.....	100°C/W
Lead Temperature (Soldering, 10s)	260°C
ESD Susceptibility	
HBM	5000V
MM	400V

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.



ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGE/ORDERING INFORMATION

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING	PACKAGE OPTION
RS221	RS221BXTDE6	-40°C~125°C	TDFN2x2-6	221B	Tape and Reel,3000







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_s=5\text{V}$, $R_L = 200\text{k}\Omega$ connected to $V_s/2$, and $V_{OUT} = V_s/2$, unless otherwise noted.)

PARAMETER	CONDITIONS	T_J	RS221B			UNIT
			MIN	TYP	MAX	
POWER SUPPLY						
V_s	Operating Voltage Range		25°C	1.8		5.5
I_Q	Quiescent Current/Amplifier		25°C		18	32
PSRR	Power-Supply Rejection Ratio	$V_s=2.5\text{V to }5.5\text{V}$, $V_{cm}=(V_-)+0.5\text{V}$	25°C	73	90	dB
			$-40^\circ\text{C to }125^\circ\text{C}$	67		
INPUT						
V_{os}	Input Offset Voltage		25°C		0.8	3.5
$V_{os\ TC}$	Input Offset Voltage Average Drift	$-40^\circ\text{C to }125^\circ\text{C}$			2.9	$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current		25°C		1	10
I_{os}	Input Offset Current		25°C		1	10
V_{cm}	Common-Mode Voltage Range	$V_s = 5.5\text{V}$	25°C	-0.1		5.6
CMRR	Common-Mode Rejection Ratio	$V_s = 5.5\text{V}, V_{cm} = -0.1\text{V to }4\text{V}$	25°C	74	90	dB
			$-40^\circ\text{C to }125^\circ\text{C}$	70		
		$V_s = 5.5\text{V}, V_{cm} = -0.1\text{V to }5.6\text{V}$	25°C	62	75	
			$-40^\circ\text{C to }125^\circ\text{C}$	60		
OUTPUT						
AOL	Open-Loop Voltage Gain	$R_L = 2\text{K}\Omega, V_o = 0.15\text{V to }4.85\text{V}$	25°C	88	98	dB
			$-40^\circ\text{C to }125^\circ\text{C}$	82		
		$R_L = 10\text{K}\Omega, V_o = 0.05\text{V to }4.95\text{V}$	25°C	92	110	
			$-40^\circ\text{C to }125^\circ\text{C}$	88		
	Output Swing From Rail	$R_L = 2\text{K}\Omega$	25°C		26	mV
		$R_L = 10\text{K}\Omega$			6	
I_{out}	Output Current Source		25°C		27	mA
FREQUENCY RESPONSE						
SR	Slew Rate		25°C		0.18	$\text{V}/\mu\text{s}$
GBP	Gain-Bandwidth Product		25°C		500	kHz
PM	Phase Margin		25°C		64	°
ts	Setting Time, 0.1%				14	us
	Overload Recovery Time	$V_{IN} \cdot \text{Gain} \geq V_s$			5	us
NOISE						
en	Input Voltage Noise Density	$f = 1\text{KHz}$	25°C		30	$\text{nV}/\sqrt{\text{Hz}}$
		$f = 10\text{KHz}$	25°C		20	$\text{nV}/\sqrt{\text{Hz}}$







TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_s = 5\text{V}$, $R_L = 200\text{k}\Omega$ connected to $V_s/2$, $V_{\text{out}} = V_s/2$, unless otherwise noted.

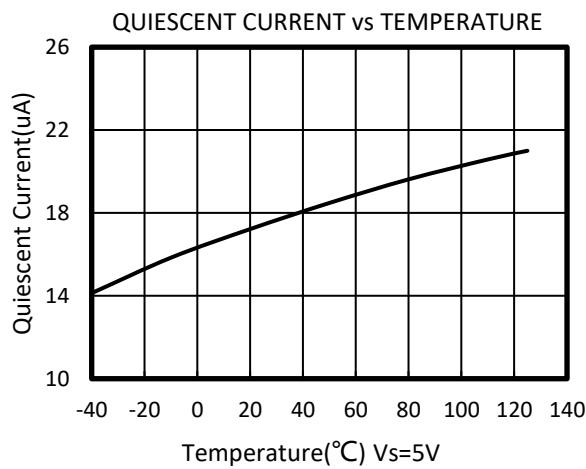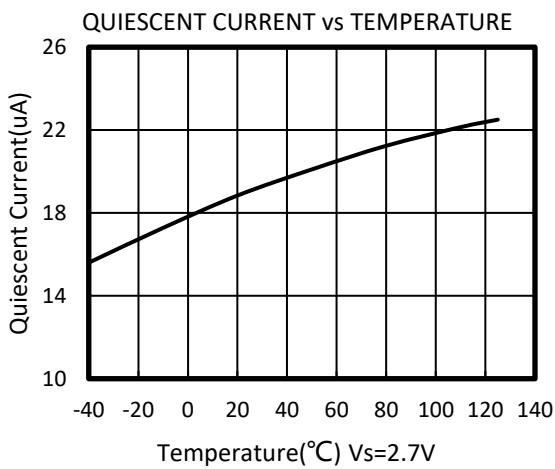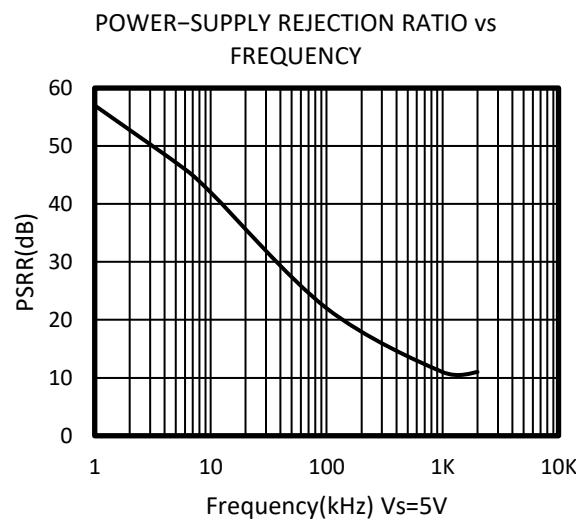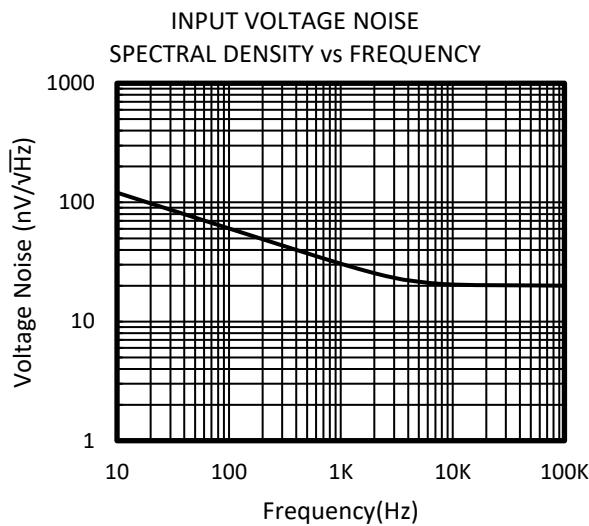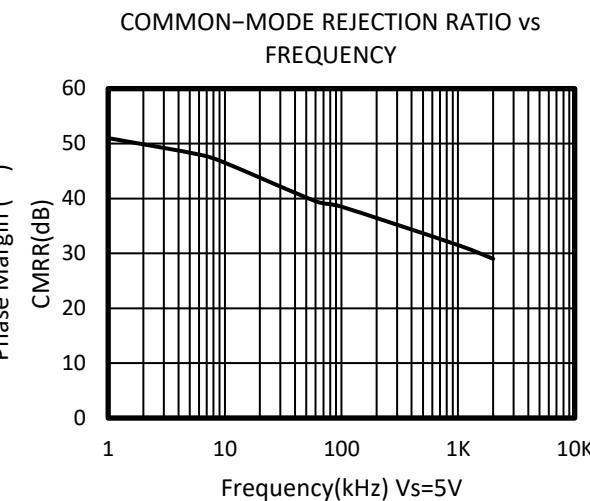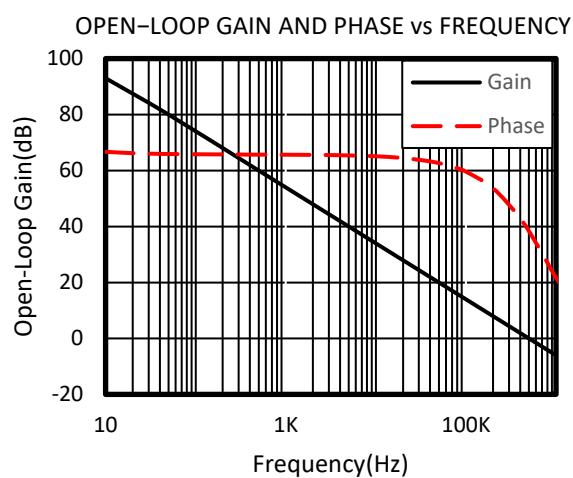



TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_s = 5\text{V}$, $R_L = 200\text{k}\Omega$ connected to $V_s/2$, $V_{\text{OUT}} = V_s/2$, unless otherwise noted.

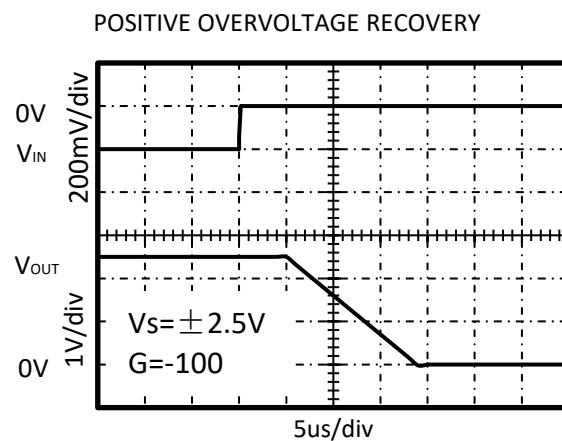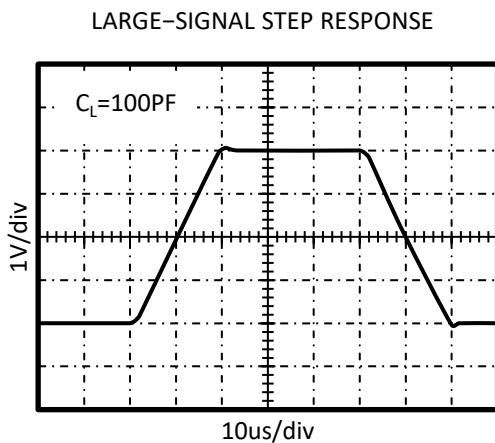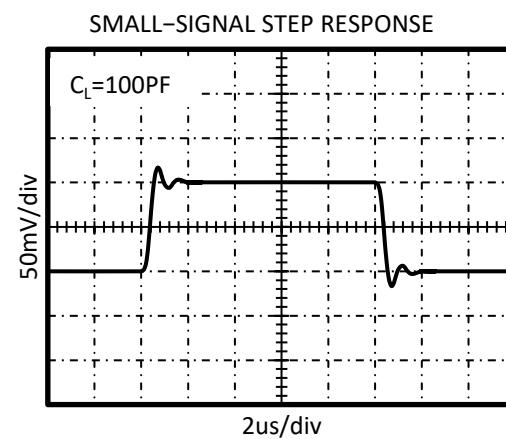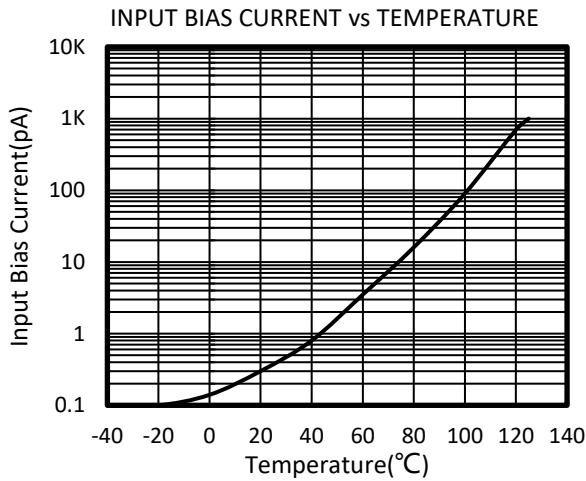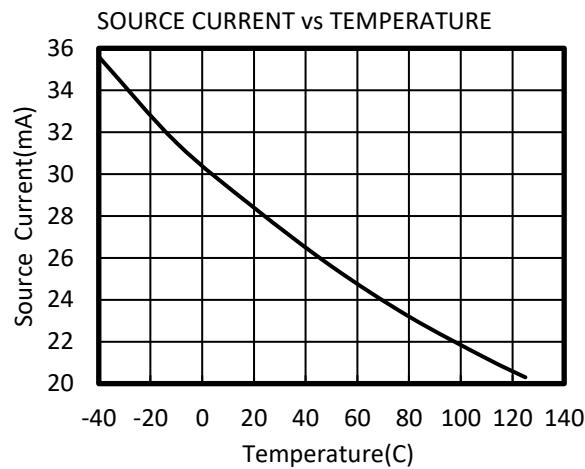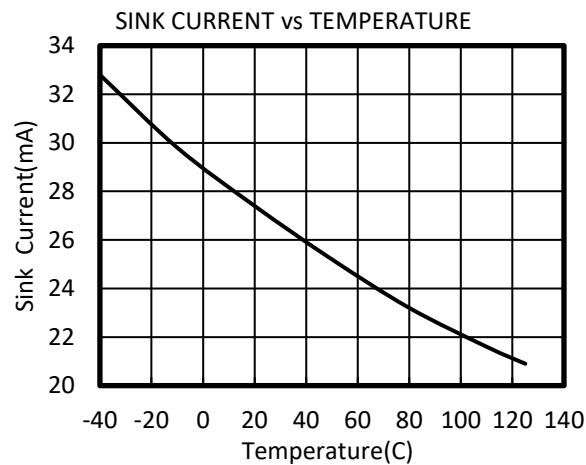

TYPICAL CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 200\text{k}\Omega$ connected to $V_S/2$, $V_{\text{OUT}} = V_S/2$, unless otherwise noted.

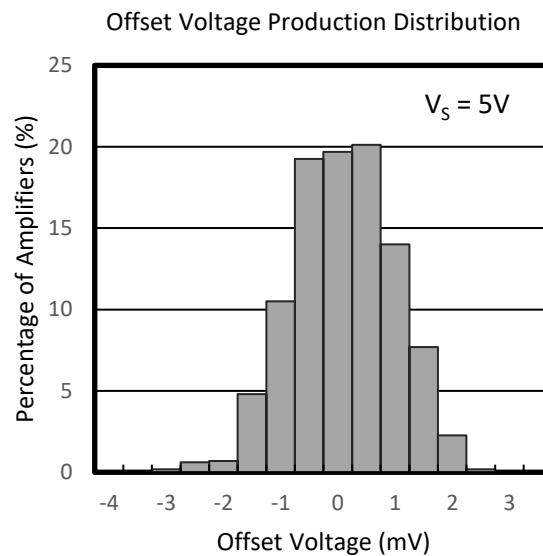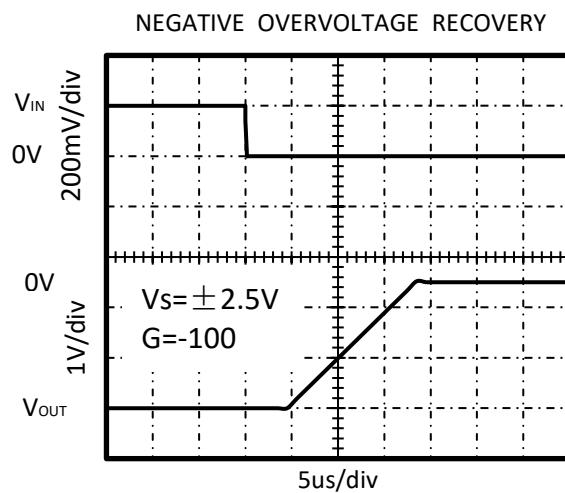

APPLICATION NOTES

The RS221B is rail-to-rail operational amplifiers that can be run from a single-supply voltage 1.8V to 5.5V ($\pm 0.9V$ to $\pm 2.75V$).

Supply voltages higher than 7V (absolute maximum) can permanently damage the amplifier.

Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Good layout practice mandates use of a 0.1uF capacitor place closely across the supply pins.

LAYOUT GUIDELINS

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1uF capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

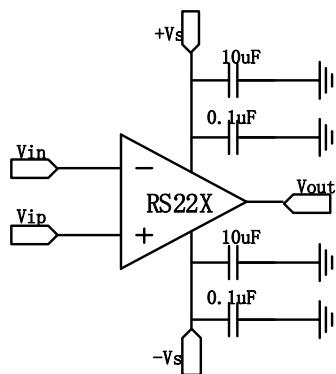


Figure1. Amplifier with Bypass Capacitors

INSTRUMENTATION AMPLIFIER

In the three-op amp, instrumentation amplifier configuration shown in Figure2,


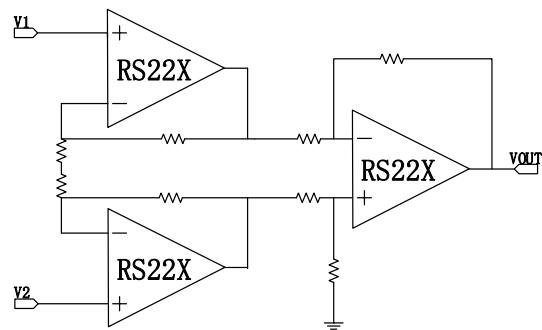



Figure2. Amplifier instrumentation amplifier

PACKAGE OUTLINE DIMENSIONS

TDFN2x2-6

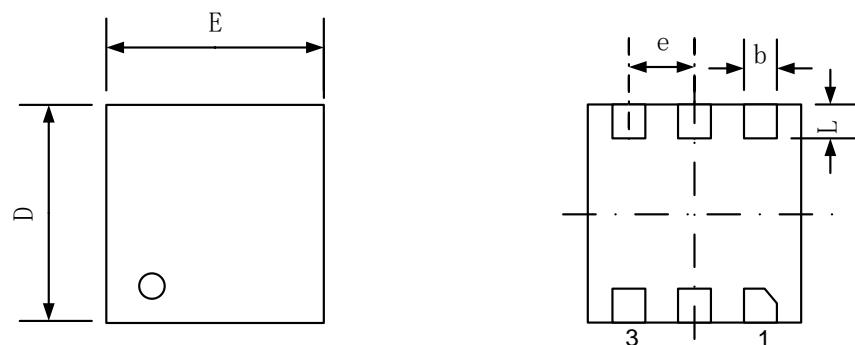


TOP VIEW

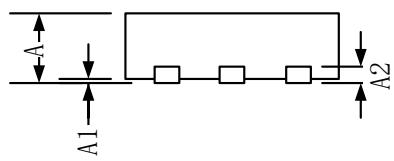

SIDE VIEW

BOTTOM VIEW

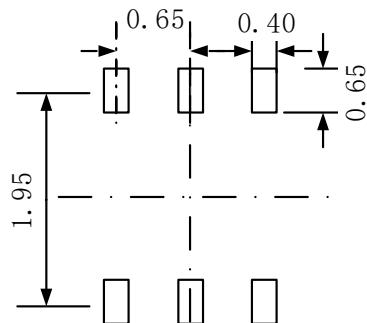

**RECOMMENDED LAND
PATTERN (Unit: mm)**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203(TYP)		0.008(TYP)	
b	0.250	0.350	0.010	0.012
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
e	0.650(TYP)		0.026(TYP)	
L	0.250	0.400	0.010	0.018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Operational Amplifiers - Op Amps category:

Click to view products by RUNCIC manufacturer:

Other Similar products are found below :

[430227FB](#) [LT1678IS8](#) [NCV33202DMR2G](#) [NJM324E](#) [M38510/13101BPA](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#)
[AZV358MMTR-G1](#) [SCY33178DR2G](#) [NCV20034DR2G](#) [NTE778S](#) [NTE871](#) [NTE937](#) [NJU7057RB1-TE2](#) [SCY6358ADR2G](#)
[NJM2904CRB1-TE1](#) [UPC4570G2-E1-A](#) [UPC4741G2-E1-A](#) [NJM8532RB1-TE1](#) [EL2250CS](#) [EL5100IS](#) [EL5104IS](#) [EL5127CY](#) [EL5127CYZ](#)
[EL5133IW](#) [EL5152IS](#) [EL5156IS](#) [EL5162IS](#) [EL5202IY](#) [EL5203IY](#) [EL5204IY](#) [EL5210CS](#) [EL5210CYZ](#) [EL5211IYE](#) [EL5220CY](#)
[EL5223CLZ](#) [EL5223CR](#) [EL5224ILZ](#) [EL5227CLZ](#) [EL5227CRZ](#) [EL5244CS](#) [EL5246CS](#) [EL5246CSZ](#) [EL5250IY](#) [EL5251IS](#) [EL5257IS](#)
[EL5260IY](#) [EL5261IS](#) [EL5300IU](#)