

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0304902002](#)
Status: **Active**
Overview: [Mini-Fit Jr.™ Power Connectors](#)
Description: Mini-Fit® Crimp Grounding Terminal, Male, with Tin (Sn) Plated Phosphor Bronze Contact, 18-24 AWG, Reel

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	30490
Application	Power
Comments	Grounding Pin
Crimp Quality Equipment	Yes
Overview	Mini-Fit Jr.™ Power Connectors
Product Name	Mini-Fit®
UPC	800754319294

Physical

Gender	Male
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.153/g
Packaging Type	Reel
Plating min - Mating	2.540µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A

Electrical

Current - Maximum per Contact	9.0A
-------------------------------	------


Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-30490-***2
---------------	---------------

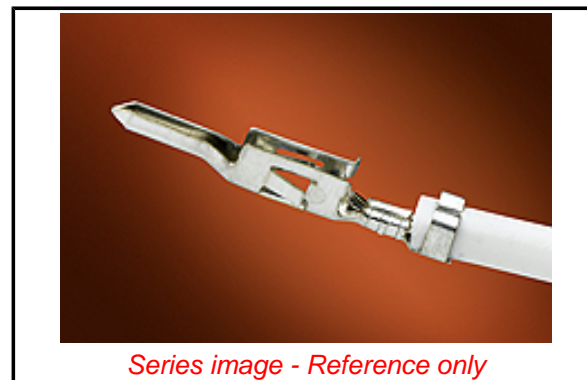

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

No -ED/39/2015 (15 June 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
ELV

China RoHS
Green Image
Not Relevant

Search Parts in this Series

[30490](#) Series

Mates With

[5556](#) Mini-Fit® Crimp Terminal

Use With

Mini-Fit Jr.™ Plug Housing [5559](#) Single Row, [30068](#) , [5559d](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

FineAdjust™
Applicator for
Insulation OD
2.50-2.95mm

Product #

[0639024800](#)

Optimized for 18 AWG Only T2 Terminator™ for insulation OD 2.50-2.95mm - 18-24 AWG	<u>0639102600</u>
T2 Terminator™ for insulation OD 2.50-2.95mm optimized for 18 AWG only	<u>0639124800</u>
T2 Terminator™ for insulation OD 2.30-2.60mm - 18-24 AWG	<u>0639124900</u>
Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire	<u>0638190900</u>
T2 Terminator™ for insulation OD 1.65 – 2.05mm – 18 – 24 AWG	<u>0639102900</u>
T2 Terminator™ for insulation OD 1.40-1.70mm - 18-24 AWG	<u>0639123900</u>
Extraction Tool	<u>0011030044</u>
T2 Terminator™ for insulation OD 1.90-2.30mm - 18-24 AWG	<u>0639115600</u>
FineAdjust™ Applicator for Insulation OD 2.50-2.95mm, 18-24 AWG Wire	<u>0639002600</u>
FineAdjust™ Applicator for Insulation OD 1.65-2.05mm, 18-24 AWG Wire	<u>0639002900</u>
FineAdjust™ Applicator for Insulation OD 1.90-2.30mm - 18-24 AWG	<u>0639015600</u>
FineAdjust™ Applicator for Insulation OD 1.40-1.70mm - 18-24 AWG	<u>0639023900</u>
FineAdjust™ Applicator for Insulation OD 2.30-2.60mm - 18-24 AWG	<u>0639024900</u>

This document was generated on 12/10/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [molex](#) manufacturer:

Other Similar products are found below :

[1201140065](#) [90814-0008](#) [38210-0105](#) [60506-C-50](#) [69008-0971](#) [73108](#) [79516-1043](#) [72903](#) [1062837003](#) [0533241060](#) [68301-1017](#)
[03-12-1016](#) [71506-C](#) [90835-0003](#) [02-09-8104](#) [880504](#) [67490-3220](#) [387790039](#) [53254-0710](#) [85071-0017](#) [70984-4008](#) [387204903](#)
[03-12-2022](#) [783472003](#) [89674-0805](#) [514412093](#) [0026482195](#) [0191310031](#) [503308-4410](#) [02-09-6102](#) [0008650814](#) [0039000218](#) [89762-1403](#)
[89762-1542](#) [89762-1582](#) [0011404526](#) [00136](#) [0022173102](#) [0026615060](#) [CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#)
[0008520123](#) [0011030025](#) [0011184017](#) [0022162060](#) [0022552102](#) [01312](#) [M15730061](#)