

9150 SERIES UNI-SEAL TOOL

Compression tool for RG 6/59, 7/11 & RCA connectors


Instructions for compression style connectors manufactured by Thomas & Betts (Snap-N-Seal), Gilbert (Ultra Seal) and PPC (EXXL)

SARGENT QUALITY TOOLS


Made in the U.S.A.
Patent Pending

TO COMPRESS RG 6/59, 7/11 AND RCA CONNECTORS


1) Open the compression chamber by activating the handle to the open position.

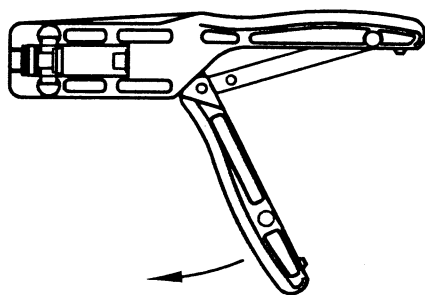

2) Push the slide up from the bottom until it clicks into the RG 6/59-RCA position or down for the RG 7/11 position.




RG 6/59-RCA position

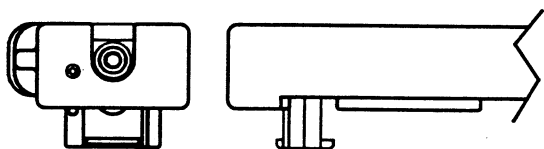


RG 7/11 position

3) Install the un-compressed connector and cable by inserting the center conductor into the hole in the compression tip while rotating downward as shown.

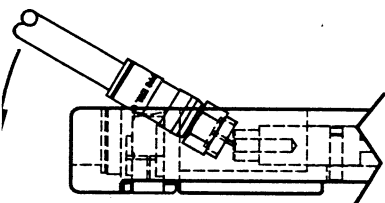


RG 6/59-RCA position

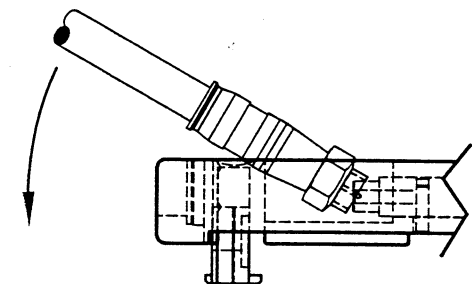


RG 7/11 position

4) Press the cable into the saddle. The connector must be fully seated to assure a uniform compression.




6/59 position





7/11 position

5) With the cable/connector pre-assembly in place squeeze the tool handle to the closed position. A toggle action is evident as the handle approaches its full movement and the handles butt.

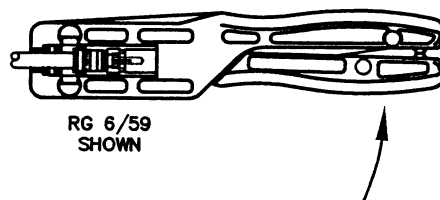

RG 6/59
SHOWN

6) Release the handle to the open position and lift the cable in a radial motion up and out of the compression chamber.

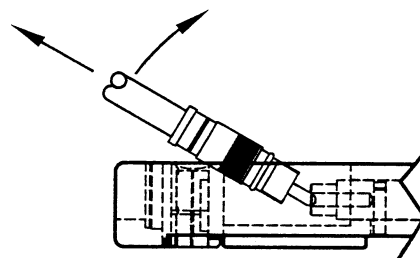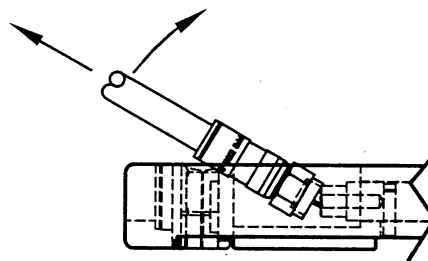

Manufactured by Rostra Tool Co., 30 East Industrial Road, Branford, Ct 06405

INS9150 (TEL) 203-488-8665 (FAX) 203-488-8665 or on the web @WWW.ROSTRATOOL.COM

04/05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Sargent](#) manufacturer:

Other Similar products are found below :

[CR-0AFL4--332K](#) [568681-1](#) [5800-0090](#) [58061-1](#) [59065-5](#) [59085](#) [00-8273-RDPP](#) [00-8729-WHPP](#) [593033](#) [593072](#) [593564100](#) [593575](#)
[593593](#) [011349-000](#) [CRCW08052740FRT1](#) [LUC-012S070DSM](#) [LUC-018S070DSP](#) [LUC-024S105DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#)
[00-5080-YWPP](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [603-JJ-07-FP](#) [603-](#)
[JJY-04](#) [M15570-25](#) [CRTN1013](#) [CS16](#) [6-1579014-0](#) [6203](#) [62200-5709](#) [6240-1](#) [M43435](#) [TY 2 SZ 3 FIN B BLK](#) [M-5Z](#) [M6816](#) [M7298](#)
[M7456](#) [M7976](#) [660-29ABT1](#) [662508-1](#) [CVHD-950X-93.333](#) [CW104-01X](#) [671-GP-04-KT39-73207](#) [CW307-01A](#)