



Current-compensated choke series for lighting applications



- Common and differential mode inductance
- Very high differential-mode inductance
- Rated currents up to 2 A
- Broadband attenuation characteristics

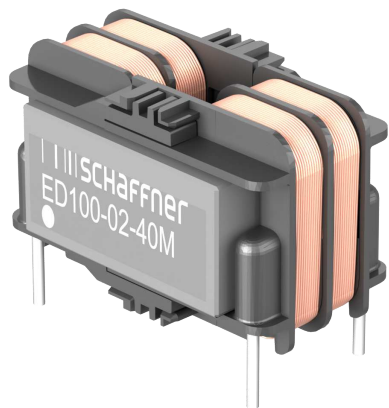

Performance indicators

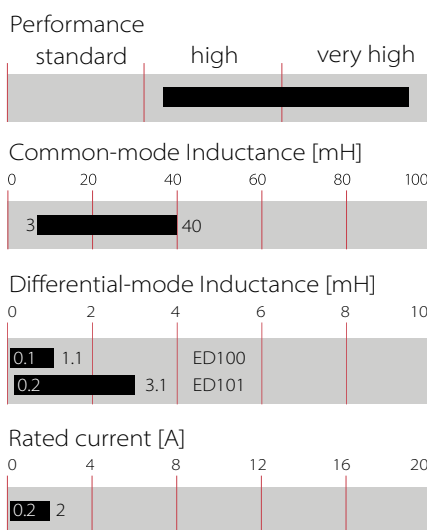

Approvals & Compliances

ROHS

Lighting LED drivers need to be high in efficiency, low in cost and compliant to EMC regulations. The ED100 / ED101 series increases the efficiency of a LED driver circuit by reducing the need for X-capacitors. Thus, the power factor rises, and less unwanted reactive power is generated. The inductor is a combination of a strong common-mode inductance with a significant differential-mode inductance. It offers two filtering elements in one component. This helps the circuit designer to reduce the number of elements on the PCB, to reduce space requirement as well as lowering costs. Combined with the high MTBF value of the ED100 / ED101 series, a circuit design with reduced number of components profits for its overall reliability and lifetime.

Features and benefits

- Increases power factor
- Combination of common- and differential-mode inductances
- Rated currents up to 2 A
- Compact and light-weight
- Small PCB footprint


Technical specifications

Maximum continuous operating voltage	300 VAC, 50/60 Hz
Rated currents	0.2 to 2 A @ 65°C
Rated inductance	3 to 40 mH common-mode
Stray inductance	0.1 - 3.1 mH
Operating frequency	DC to 60 Hz
Temperature range (operation and storage)	-40°C to 125°C
Climatic class	40/125/56 acc. IEC 60068-1
High potential test voltage winding-to-winding @ 25°C	1500 VAC, 2 sec
Creepage and clearance distances	Creepage > 3 mm / Clearance > 2.5 mm between windings
Overvoltage category	II acc. IEC 60664-1
Design corresponding to	IEC 60938-1/-2
Inductance reduction (DC bias with IN)	Less than 10% at rated current
Cooling	AN - natural convection
Flammability corresponding to	UL 94 V-0
Altitude	Derating above 2,000 m
Protection category	IP 00
Pollution degree	PD2 acc. IEC 60664-1
MTBF	> 13,000,000 hours acc. MIL-HDBK-217
Vibration and shock	3M4 acc. IEC 60721-3-3

Typical applications

- Mains operated LED drivers
- Electronic ballasts
- Input filters for switch mode power supplies

Typical electrical schematic

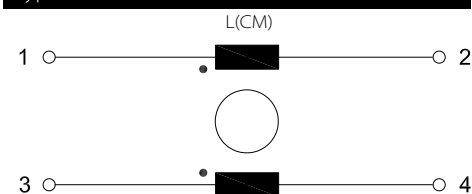

Choke selection table - ED100 - High Differential-Mode Inductance


ED100 choke	Buy	Rated current I (@65°C) [A]	Common- Mode Inductance L (CM) (@10kHz) [mH]	Differential- Mode Inductance L (DM) (@10kHz) [mH]	DC resistance R (@25°C) [Ω]	Weight [g]
ED100-0.2-40M		0.2	40	1.1	10.0	10
ED100-0.3-27M		0.3	27	0.8	5.5	10
ED100-0.4-20M		0.4	20	0.6	3.7	10
ED100-0.5-15M		0.5	15	0.4	2.0	10
ED100-0.75-12M		0.75	12	0.3	1.2	11
ED100-1-9M0		1	9	0.3	0.6	12
ED100-1.25-7M0		1.25	7	0.2	0.4	13
ED100-1.5-5M0		1.5	5	0.1	0.3	13
ED100-2-3M0		2	3	0.1	0.2	13

Choke selection table - ED101 - Very High Differential-Mode Inductance

ED101 choke	Buy	Rated current I (@65°C) [A]	Common- Mode Inductance L (CM) (@10kHz) [mH]	Differential- Mode Inductance L (DM) (@10kHz) [mH]	DC resistance R (@25°C) [Ω]	Weight [g]
ED101-0.2-40M		0.2	40	3.1	10.0	11
ED101-0.3-27M		0.3	27	2.1	5.5	11
ED101-0.4-20M		0.4	20	1.5	3.7	11
ED101-0.5-15M		0.5	15	1.2	2.0	12
ED101-0.75-12M		0.75	12	0.9	1.2	12
ED101-1-9M0		1	9	0.7	0.6	13
ED101-1.25-7M0		1.25	7	0.5	0.4	14
ED101-1.5-5M0		1.5	5	0.4	0.3	14
ED101-2-3M0		2	3	0.2	0.2	14

Test conditions: Measuring frequency: 10 kHz; 50 mV; Inductance tolerance: +50%, -30%; Resistance tolerance: ±15% @ 25°C; Electrical characteristics @ 25°C: ±2°C;
Differential-mode inductance measurement between pin 1 and 2 (pin 3 and 4 shorted)
For mechanical tolerances refer to mechanical data section.

Current derating



Derating curve normalized to 1 A

Distribution inventory


Up-to-date inventory levels for global distributors is available at

<https://products.schaffner.com/stock>




Typical choke attenuation - ED100 - High Differential-Mode Inductance


Per CISPR 17; 50 Ω/50 Ω asym

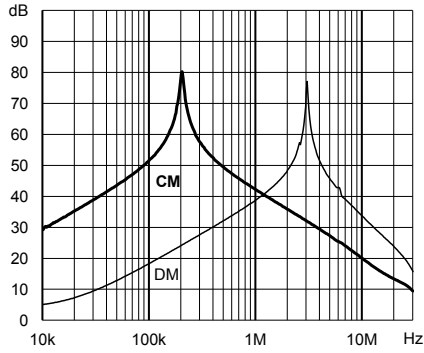


ED100-0.2-40M

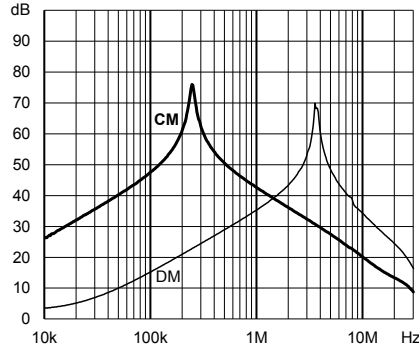


ED100-0.3-27M

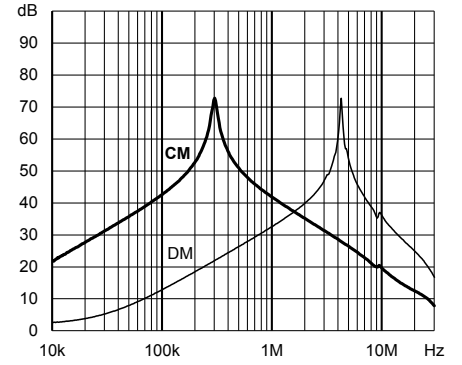


ED100-0.4-20M

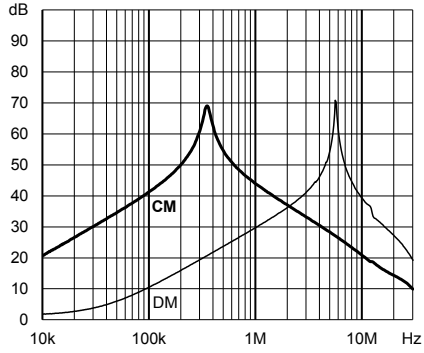


ED100-0.5-15M

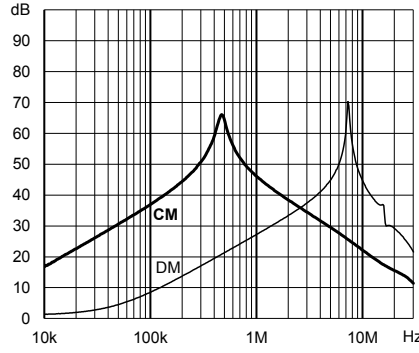


ED100-0.75-12M

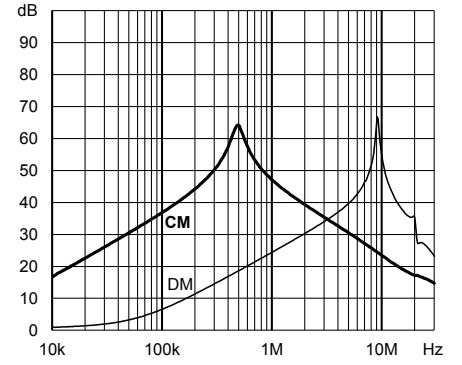


ED100-1-9M0

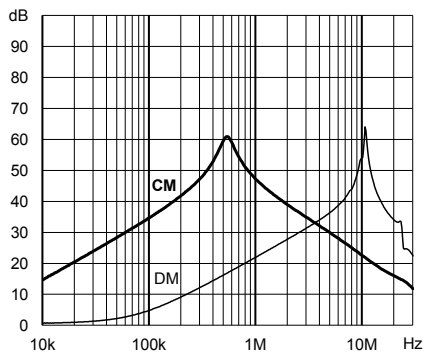

ED100-1.25-7M0

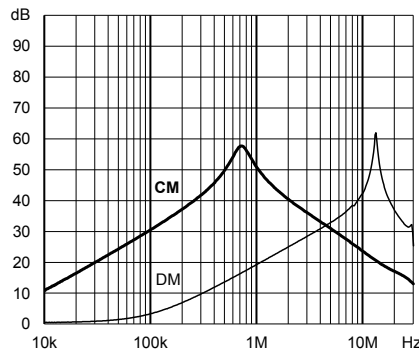


ED100-1.5-5M0

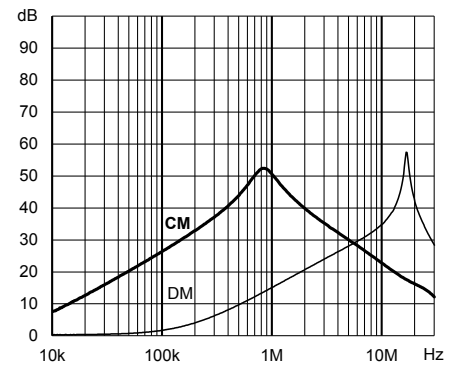


ED100-2-3M0

Typical choke attenuation - ED101 - Very High Differential-Mode Inductance


Per CISPR 17; 50 Ω/50 Ω asym

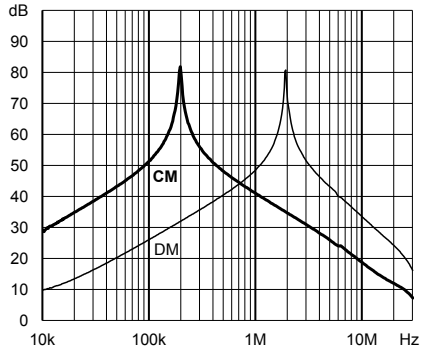


ED101-0.2-40M

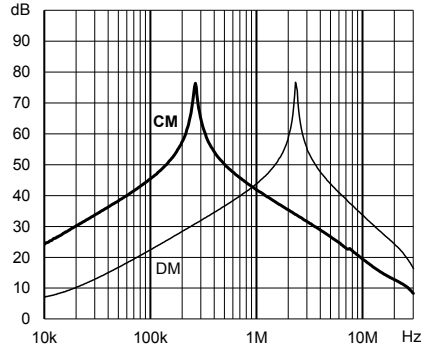


ED101-0.3-27M

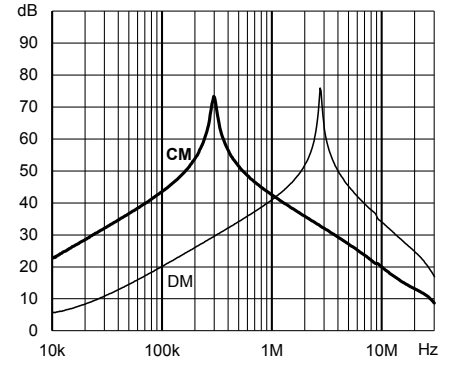


ED101-0.4-20M

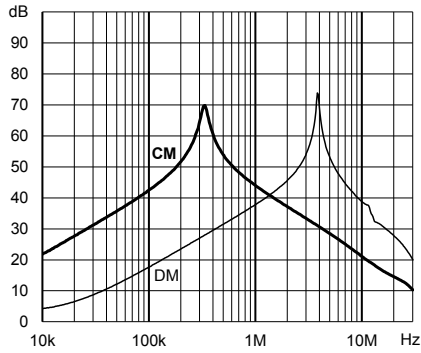


ED101-0.5-15M

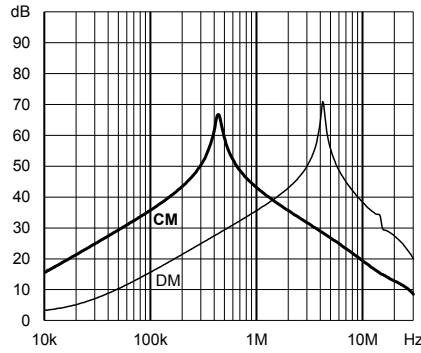


ED101-0.75-12M

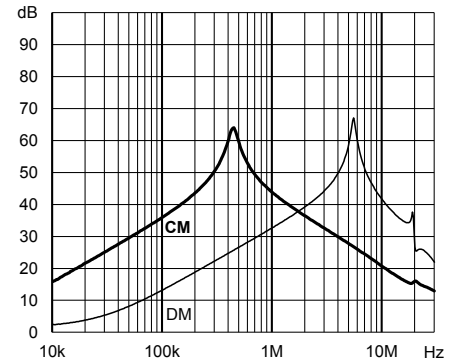


ED101-1-9M0

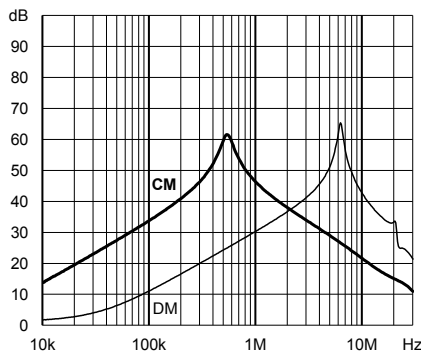





ED101-1.25-7M0

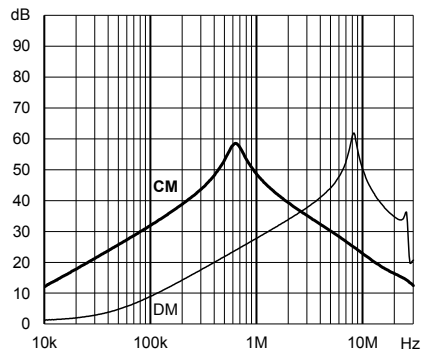

ED101-1.5-5M0

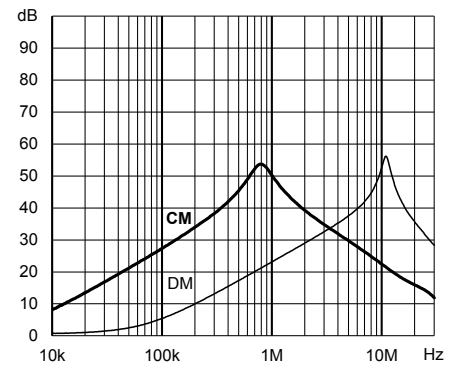

ED101-2-3M0

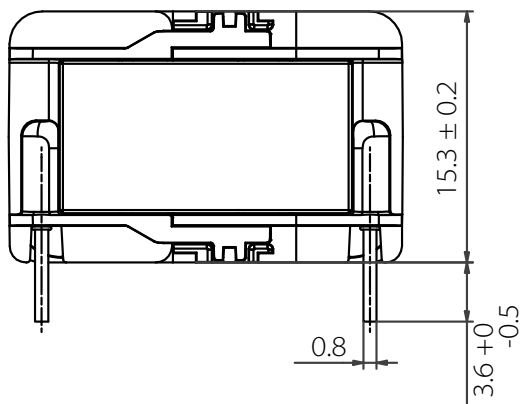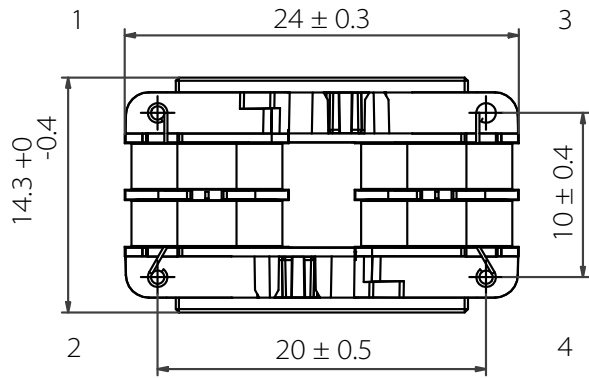Mechanical data - ED100 / ED101

For dimensions [mm] without tolerances: ISO2768-m/EN22768-m applies

Pin material: Steel (base), Cu (under plating), Sn (final plating 6 μ m)

Pin 1 marked with "dot" on label



Headquarters, global innovation and development

Switzerland

Schaffner Group

Industrie Nord
Nordstrasse 11e
4542 Luterbach
T +41 32 681 66 26
info@schaffner.com



Sales and application centers

China

Schaffner EMC Ltd. Shanghai

T20-3 C, No 565 Chuangye Road,
Pudong district
201201 Shanghai
T +86 21 3813 9500
cschina@schaffner.com
www.schaffner.com.cn

Finland

Schaffner Oy

Sauvonrinne 19 H
08500 Lohja
T +358 50 468 7284
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.

16-20 Rue Louis Rameau
95875 Bezons
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH

Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
germanysales@schaffner.com

India

Schaffner India Pvt. Ltd

REGUS WORLD TRADE CENTRE
WTC, 22nd Floor Unit No 2238, Brigade
Gateway Campus, 26/1, Dr. Rajkumar Road
Malleshwaram (W)
560055 Bangalore
T +91 80 67935355
indiasales@schaffner.com

Italy

Schaffner EMC S.r.l.

Via Ticino, 30
20900 Monza (MB)
T +39 039 21 41 070
italysales@schaffner.com

Japan

Schaffner EMC K.K.

Taiju-Seimei Sangenjaya Bldg.
1-32-12, Kamiyuma, Setagaya-ku
154-0011 Tokyo
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Singapore

Schaffner EMC Pte Ltd.

#05-09, Kg Ubi Ind. Estate
408705 Singapore
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E
El Soto de Moraleja, Alcobendas
28109 Madrid
T +34 917 912 900
F +34 917 912 901
spainsales@schaffner.com

Sweden

Schaffner EMC AB

Östermalmstorg 1
114 42 Stockholm
T +46 8 5050 2425
swedensales@schaffner.com
www.schaffner.com

Switzerland

Schaffner EMV AG

Industrie Nord
Nordstrasse 11e
4542 Luterbach
T +41 32 681 66 88
T +41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan

Schaffner EMV Ltd.

20 Floor-2, No 97, Section 1, XinTai 5th Road
22175 XiZhi District New Taipei City 22175
T +886 2 2697 5500
F +886 2 2697 5533
taiwansales@schaffner.com
www.schaffner.com.tw

Thailand

Schaffner EMC Co. Ltd.

Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muangng P.O. Box 14
51000 Lamphun
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

United Kingdom

Schaffner Ltd.

1, Oakmede Place
Binfield
RG42 4JF Berkshire
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com

USA

Schaffner EMC Inc.

52 Mayfield Avenue
Edison, New Jersey
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffnerusa.com

To find your local partner within Schaffner's global network: www.schaffner.com

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Schaffner](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#)
[UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [CM7060M132R-10](#)
[UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#) [2752045447](#) [CM8663Z161B-10](#) [7351V](#)
[CMF16-153131](#) [T8116NLT](#) [CMS2-10-R](#) [FE2X10-4-2NL](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#)
[RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#) [WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [B82498B3221J000](#) [PAC6006.364NLT](#)
[PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#) [PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)
[CM6350R-683-REEL](#) [CUW43T-513T-AU](#) [CUW43T-104T-AU](#)