

Two-stage general-purpose filter

FN 660

- Current ratings from 1 to 20A
- High differential and common mode attenuation
- Four choices of output connector
- Optional medical versions (B type)
- Nennströme von 1 bis 20A
- Gute differentielle und Gleichtakt-Dämpfung
- Vier Anschlußarten
- Für medizinische Geräte als Option (Typ B)
- Courants de service de 1 à 20A
- Bonne atténuation en modes différentiel et commun
- Quatre types de connexions de sortie
- Version pour appareils médicaux en option (type B)



Filter selection table

Choose the family FN xxx with the required current rating and features, and add /?? to determine input/output (line/load) connection style. Example: FN 660-3/07 is a 3A filter with wire connections.

Approvals




Family	Connections				Current ratings at 40°C (25°) A	Inductance L/L1 mH	Housing	Weight g			
								/03	/06	/07	/10
FN 660 -1 /??		/06	/07		1 (1.15)	3/3	H21	115	125		
FN 660 -3 /??		/06	/07		3 (3.4)	2/2	K1	170	180		
FN 660 -6 /??		/06	/07		6 (6.9)	0.75/0.75	K1	170	180		
FN 660 -10 /??		/06	/07		10 (11.5)	0.45/0.45	K21	230	240		
FN 660 -16 /??	/03	/06		/10	16 (18.4)	0.44/0.44	K2	290	260		290
FN 660 -20 /??	/03	/06		/10	20 (23)	0.48/0.48	L1	600	590		640

Additional specifications

Filter type	Capacitance		Res. R MΩ	Maximum leakage μA/phase	Maximum operating voltage		Operating frequency Hz	Hipot test voltage	
	Cx nF	Cy nF			VAC	Hz		PN→E VAC	P→N VAC
Standard types	150	2.2	1	190	250	50/60	DC to 400	2000	1700
B types (medical)	150		1	2	250	50/60	DC to 400	2500	1700

MTBF at 40°C, 230V, per Mil-HB-217F: 350,000 hours (for VDE-approved current ratings).

Electrical schematic

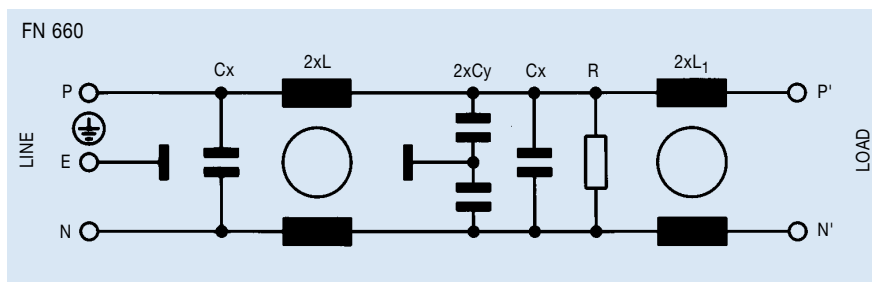


See tables for component values.


FN 660 insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1 amp types




3 amp types




6 amp types




10 amp types



16 amp types




20 amp types




Mechanical data

	FN 660-1 H21	Tol. mm
A	71	± 0.5
B	46.6	± 1
C	29	± 1
D	50.5	± 1
F	61	± 0.2
J	21 ^(J1) 8.5 ^(J2)	± 0.5
K	10.5	± 0.3
L	19	± 0.5
M	5.3	± 0.1
N	6.3	± 0.1
Y	6	± 1
Z	140	+ 5

Front view




Housing K2, K21



Housing H21, K1


Top view

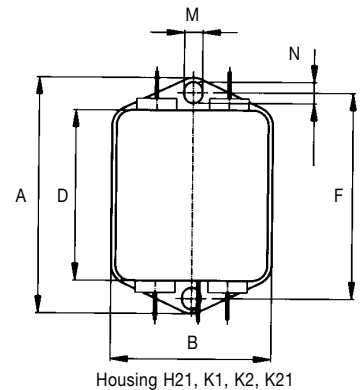

Housing H21, K1, K2, K21


	FN 660 -3-6 K1	FN 660 -10/-16 K2, K21	FN 660 -20 L1	Tol.* mm
A		85	105	± 0.5
B		54	99.5 ± 1	± 0.5
C	30	40	38	± 1
D		65	84.5	± 1
E			79	± 0.5
F		75	95	± 0.2
G			51	± 0.1
J	27 ^(J1) 8.5 ^(J2)	27	40	± 0.5
K	7	12	9.5	± 0.5
L		29.5	19	± 0.5
M		5.3	4.4	± 0.1
N		6.3	6	± 0.1
W	AWG 16			-
Y		6		± 1
Z	300	140 + 5		+ 10

Front view



Housing L1

Top view

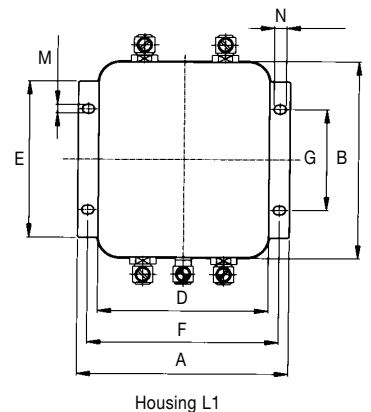

Housing L1

* Measurements share this common tolerance unless otherwise stated.

All dimensions in mm; 1 inch = 25.4 mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Line Filters](#) category:

Click to view products by [Schaffner](#) manufacturer:

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#) [20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#) [3K1](#)