

Data Sheet Model No.: GP1604G

## **NO MERCURY ADDED**

Description : Mercury Free Layer Built Extra Heavy Duty

Battery

Chemical System : Zinc Chloride Nominal Voltage : 9.0 Volts

Nominal Dimensions: 26.5 mm x 17.5 mm x 48.5 mm
Terminals: Standard snap fastener stud (+) and

socket(-)

Jacket : Metal jacket

Applications : All electronic devices, e.g. toys,

remote controllers


Shelf Life : 18 months Average Weight : 38.0g

Date Code : Unless otherwise specified, every battery

will carry an expiry date code for 18 months. (e.g. a battery manufactured on January 1999 will carry an expiry code of 07-00.) 07 stands for July, 00 stands for 2000


## **Estimated Service:**

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/ Day 7 Days/ Week	5.40V	30.0 Hrs
180 Ohms	30 Mins/ Day 7 Days/ Week	4.80V	8.0 Hrs

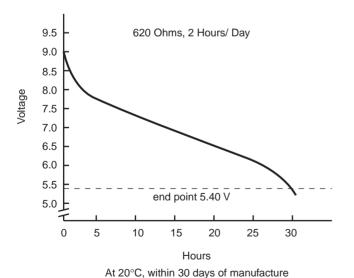

## Cross References:

GP	JIS	IEC	Eveready
1604G	6F22	6F22	1222

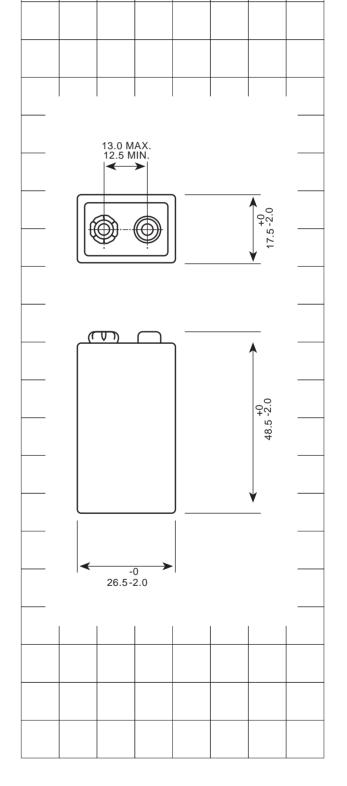

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for gp batteries manufacturer:

Other Similar products are found below:

GP14A S2 GP 15AU ULTRA PLUS B4 GP15E GP 1604 ULTRA PLUS GP 24AU ULTRA PLUS B4 11A B5 A76-U10 13A-U2 15A-U4 15AU-U4 164-U10 189-U10 24AU S2 27A B5 1604AU GP14E GP R20A 312G-U1 ZA13 LR1/910A CC61W-B1 GPR6AU/FO2 GP24A/FO2 SUPER GP X411 AA/AAA + 4X R6 2700MAH RECYKO PB570 + 4XAA 2700MAH PB50 H500 + 4X AA GP U411+ 4 X R6 2000MAH PRO GP U421+ 4 X R6 2100MAH GP U421+ 4 X R6 2600MAH GP U411+ 4 X R6 2600MAH GP XPLOR PH14 BB3 PB550 + 4XAA 2700MAH PB420 + 4XAA 2500MAH PB50 ZA10 B6 GP910A-20 186-U10 GP U211+ 2 X R6 2100MAH GP13G-C20 GP U811+ 4X R6 2100MAH GP XPLOR PH15 BB3 PB320 PB420 GP GP1604AU-C1 GP1604-10 13G U2 177-U10 GP1604GLF-2UE1 192-U10 24G-S2