


## 9502NH

**Instrumentation and computer cable  
AWG24 (7xAWG32) 2 twisted pair  
Overall Beldfoil® + Drain wire  
FRNC (UV stabilised) sheath.**

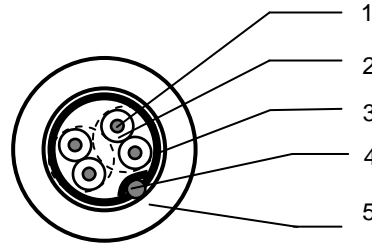

### Applications

---

- For EIA RS-232 data transmission applications.

### General Standards

---

- EN 50290-2-27

### Construction & Dimensions

---

<b>1. Inner Conductor</b>	
Material	Tinned Copper
Diameter	AWG24 (7xAWG32)
<b>2. Insulation</b>	
Material	PE
Diameter over insulation	1.12 ± 0.05 mm
Colour of insulation	Pair 1: Black and red Pair 2: Black and White
<b>3. Foil (Beldfoil®)</b>	
Material	Aluminium / Polyester
Thickness	9 / 12 µm
<b>4. Drain wire</b>	
Material	Tinned Copper
Diameter	AWG24 (7xAWG32)
<b>5. Sheath</b>	
Material	FRNC (UV stabilised)
Colour	Chrome (RAL 7037)
Nominal thickness	0.90 mm
Nominal diameter	5.80 mm

## Mechanical characteristics

Parameter	Specification	Unit
Flame resistance	IEC 60332-3-24	
Smoke density	IEC 61034	
Oil resistance	IEC 60811-404	
Radiation resistance	IEC 60544	
Application specification	EN 50290-2-27	
Halogen content according to IEC 60754-1	zero	
Corrosivity of fire gasses to IEC 60754-2		
Conductivity	≤ 100	μS/cm
pH value	≥ 4.3	
Temperature range installing	-15 to +80	°C
Temperature range operating (moving installation)	-15 to +80	°C
Temperature range operating (fixed installation)	-45 to +80	°C
Temperature range storage	-45 to +80	°C
Minimum bending radius	10 x cable diameter	
Maximum pulling tension	100	N

## Electrical characteristics

Parameter	Specification	Unit
Nominal resistance conductor	78.7	Ω/km
Nominal resistance shield	55.8	Ω/km
Nominal capacitance conductor to conductor of a pair	98.4	pF/m
Nominal capacitance conductor to shield + other conductor	164.0	pF/m
Test voltage conductor-conductor	2500	VDC, 3 seconds
Test voltage conductor-screen	2500	VDC, 3 seconds
Voltage rating	300	V RMS
Maximum continues current per conductor @ 25 °C	1.76	A



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2011/65/EU, 02 Jan. 2013); this is valid for all material produced after the RoHS compliant date for this product.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [belden manufacturer](#):*

Other Similar products are found below :

[HIPWP4LA](#) [HIPWP2LA](#) [49905A 060S2](#) [49907A 060S2](#) [8916-BRN-100](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8918-GRY-1000](#) [8919-DK-BLU-100](#) [8920-008-1000](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [5T00UP 008500](#) [7810A-BLK-500](#) [7860NBH](#) [7934A-BLK-1000](#) [7937A-BLK-1000](#) [8019-100](#) [8080](#) [8108-060-1000](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-060-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8221-BLK-1000](#) [8233-010-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8241-006-U1000](#) [8241A-BLK-1000](#) [8241F-RED-MATTE-1000](#) [8263-BLK-U1000](#) [8279-BLK-1000](#) [8281-003-1000](#) [8281 010500](#) [83000 002100](#) [83002 0101000](#) [83003-006-500](#) [83003-VIO-500](#) [83004-RED-100](#) [83008 0091000](#) [83008-WHT-1000](#) [83010-BRN-100](#)