
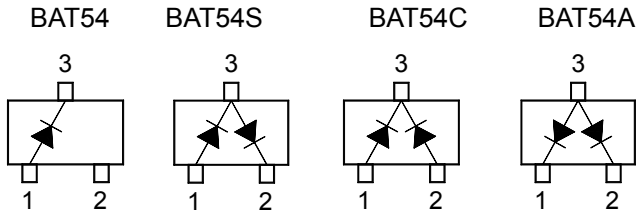


BAT54 / A / C / S

Schottky Barrier Diodes



BAT54 Marking Code: **L4**
 BAT54A Marking Code: **L42**
 BAT54C Marking Code: **L43**
 BAT54S Marking Code: **L44**
 TO-236 Plastic Package


Absolute Maximum Ratings¹⁾ (T_a = 25°C)

Parameter	Symbol	Limits	Unit
Repetitive peak reverse voltage	V _{RRM}	30	V
Average rectified forward current	I _{F(AV)}	200	mA
Repetitive Peak Forward Current	I _{FRM}	300	mA
Non-repetitive peak forward surge current at Pulse width=1 second	I _{FSM}	600	mA
Power dissipation	P _{tot}	290	mW
Thermal resistance junction to ambient air	R _{θJA}	430	°C/W
Junction temperature	T _j	- 55 to + 150	°C
Storage temperature range	T _{stg}	- 55 to + 150	°C

¹⁾ These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Characteristics at T_a = 25°C

Parameter	Symbol	Min.	Max.	Unit
Forward voltage at I _F = 0.1 mA at I _F = 1 mA at I _F = 10 mA at I _F = 30 mA at I _F = 100 mA	V _F	-	240 320 400 500 1000	mV
Reverse current at V _R = 25 V	I _R	-	2	μA
Breakdown voltage at I _R = 10 μA	V _R	30	-	V
Total capacitance at V _R = 1 V, f = 1 MHz	C _{tot}	-	10	pF
Reverse recovery time at I _F = 10 mA, I _R = 10 mA, I _{RR} = 1 mA, R _L = 100 Ω	t _{rr}	-	5	ns




SEMTECH ELECTRONICS LTD.




Dated: 16/03/2015 Rev: 01



**Typical Forward Voltage
Forward Current
at Various Temperatures**

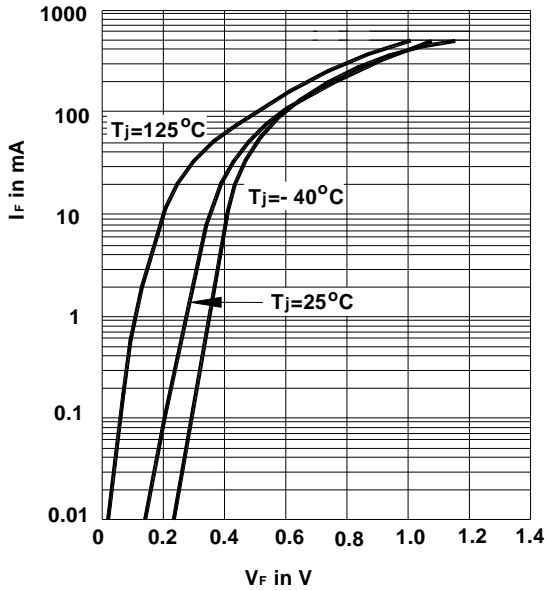

**Typical Variation of Reverse
Current at Various Temperatures**

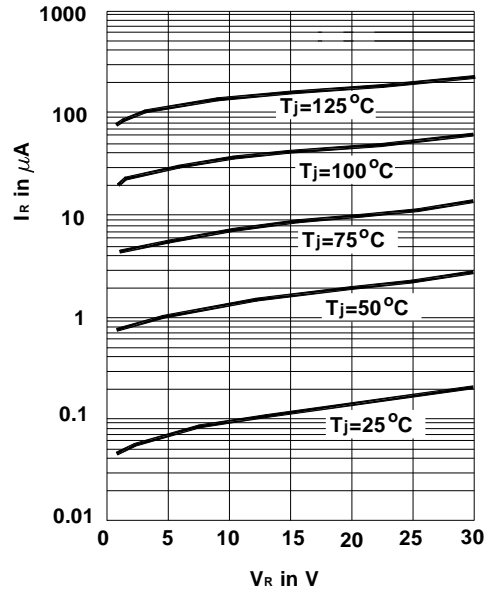

**Typical Capacitance C_C vs.
Reverse Applied Voltage V_R**

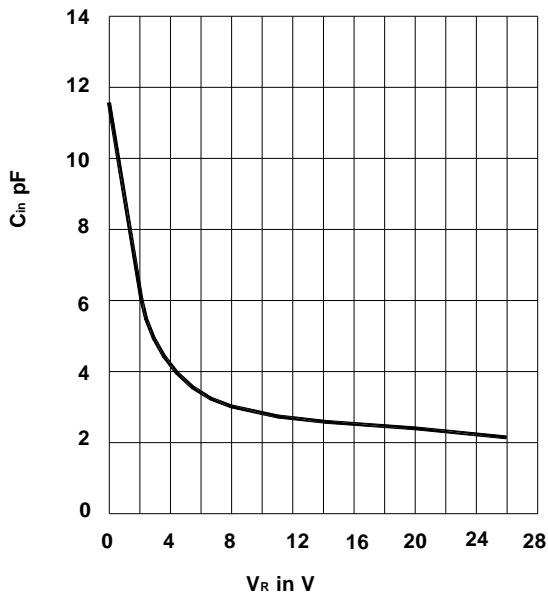

SEMTECH ELECTRONICS LTD.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#)
[CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#)
[CDBQC0530L-HF](#) [BAT54-13-F](#) [ACDBA340-HF](#)