


# BC846...BC850

## NPN Silicon Epitaxial Transistor

for switching and amplifier applications


As complementary types the PNP transistors BC856...BC860 is recommended.



1.BASE 2.EMITTER 3.COLLECTOR  
TO-236 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit	
Collector Base Voltage	BC846	$V_{CBO}$	80	V
	BC847, BC850	$V_{CBO}$	50	V
	BC848, BC849	$V_{CBO}$	30	V
Collector Emitter Voltage	BC846	$V_{CEO}$	65	V
	BC847, BC850	$V_{CEO}$	45	V
	BC848, BC849	$V_{CEO}$	30	V
Emitter Base Voltage	BC846, BC847	$V_{EBO}$	6	V
	BC848, BC849, BC850	$V_{EBO}$	5	V
Collector Current	$I_C$	100	mA	
Peak Collector Current	$I_{CM}$	200	mA	
Power Dissipation	$P_{tot}$	300	mW	
Junction Temperature	$T_j$	150	$^\circ\text{C}$	
Storage Temperature Range	$T_{stg}$	- 65 to + 150	$^\circ\text{C}$	




**SEMTECH ELECTRONICS LTD.**



# BC846...BC850

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$


Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_{CE} = 5\text{ V}$ , $I_C = 2\text{ mA}$	Current Gain Group A	$h_{FE}$	110	-	220	-
	B	$h_{FE}$	200	-	450	-
	C	$h_{FE}$	420	-	800	-
Collector Base Cutoff Current at $V_{CB} = 30\text{ V}$	$I_{CBO}$	-	-	15	nA	
Collector Base Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	BC846	$V_{(BR)CBO}$	80	-	-	V
	BC847, BC850	$V_{(BR)CBO}$	50	-	-	V
	BC848, BC849	$V_{(BR)CBO}$	30	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 2\text{ mA}$	BC846	$V_{(BR)CEO}$	65	-	-	V
	BC847, BC850	$V_{(BR)CEO}$	45	-	-	V
	BC848, BC849	$V_{(BR)CEO}$	30	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 100\text{ }\mu\text{A}$	BC846, BC847	$V_{(BR)EBO}$	6	-	-	V
	BC848, BC849, BC850	$V_{(BR)EBO}$	5	-	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 0.5\text{ mA}$ at $I_C = 100\text{ mA}$ , $I_B = 5\text{ mA}$	$V_{CEsat}$	-	-	250	mV	
	$V_{CEsat}$	-	-	600	mV	
Base Emitter On Voltage at $V_{CE} = 5\text{ V}$ , $I_C = 2\text{ mA}$ at $V_{CE} = 5\text{ V}$ , $I_C = 10\text{ mA}$	$V_{BE(on)}$	580	-	700	mV	
	$V_{BE(on)}$	-	-	720	mV	
Transition Frequency at $V_{CE} = 5\text{ V}$ , $I_C = 10\text{ mA}$ , $f = 100\text{ MHz}$	$f_T$	-	300	-	MHz	
Output Capacitance at $V_{CB} = 10\text{ V}$ , $f = 1\text{ MHz}$	$C_{ob}$	-	-	6	pF	
Input Capacitance at $V_{EB} = 0.5\text{ V}$ , $f = 1\text{ MHz}$	$C_{ib}$	-	9	-	pF	




**SEMTECH ELECTRONICS LTD.**




STATIC CHARACTERISTIC

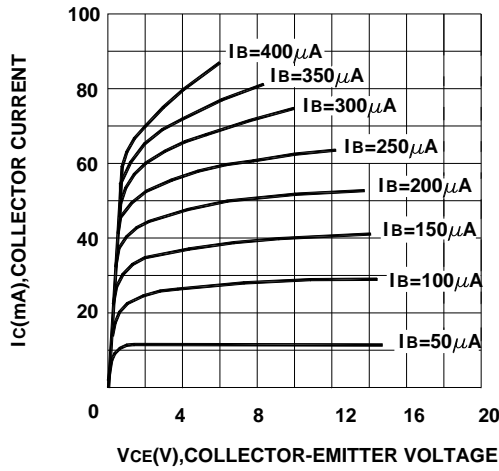


BASE-EMITTER ON VOLTAGE

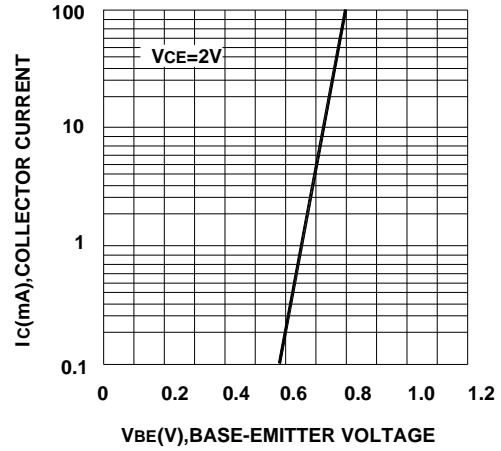


DC CURRENT GAIN

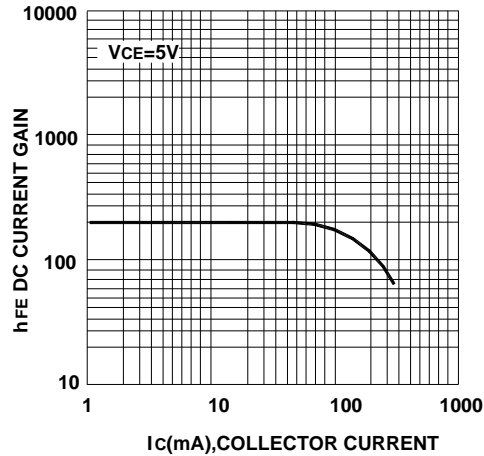



CURRENT GAIN BANDWIDTH PRODUCT

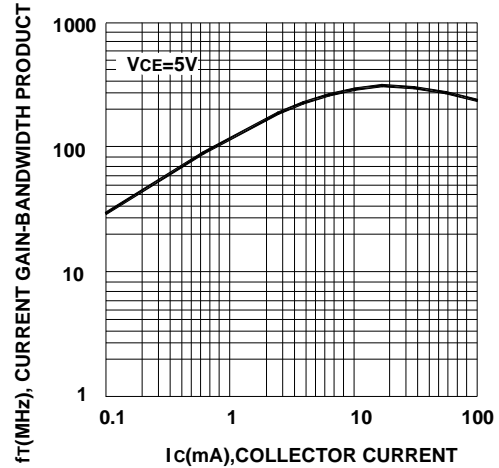

BASE-EMITTER SATURATION VOLTAGE  
COLLECTOR-EMITTER SATURATION VOLTAGE

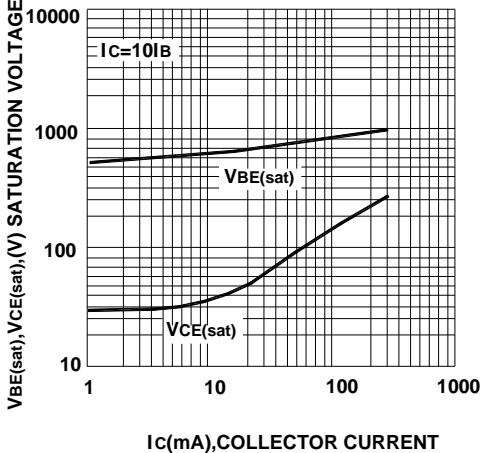

COLLECTOR OUTPUT CAPACITANCE

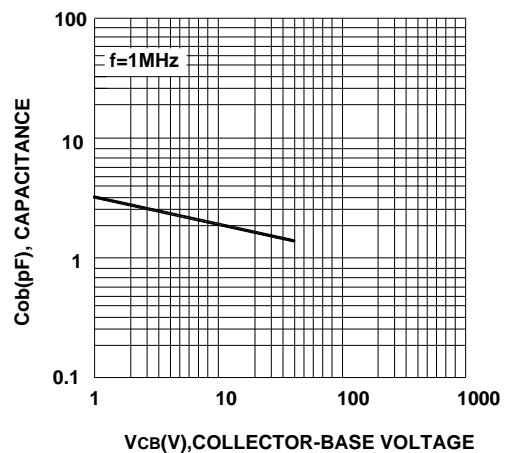

**SEMTECH ELECTRONICS LTD.**



ISO/TS 16949:2009  
Certificate No. 180713000

ISO14001:2004  
Certificate No. 7116

ISO 9001:2008  
Certificate No. 50719410

BS-OHSAS 18001:2007  
Certificate No. 7116

IECQ QC 080000  
Certificate No. PRC-HSPM-1485-1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Semtech manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC4731T-AY](#) [FJPF5304DTU](#)  
[2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SB1324-TD-E](#) [2SC2412KT146S](#) [2SC3902S](#) [2SC5231C8-TL-E](#) [2SD1685F](#) [CPH6501-TL-](#)  
[E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#)  
[UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#)