

MBR0540W


Surface Mount Schottky Barrier Diode

Features

- Low forward voltage
- High conductance

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

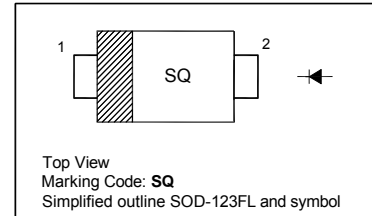

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
Reverse Voltage	V_R	40	V
Average Rectified Forward Current	$I_{F(AV)}$	0.5	A
Peak Forward Surge Current (8.3 ms Single Half Sine-wave)	I_{FSM}	20	A
Thermal Resistance Junction to Lead ¹⁾	$R_{\theta JL}$	118	$^\circ\text{C/W}$
Thermal Resistance Junction to Ambient ²⁾	$R_{\theta JA}$	206	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_j	- 65 to + 150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

¹⁾ Device mounted on FR-4 PCB 0.013 mm.

²⁾ 1 inch" pad size (1 X 0.5 inch for each lead) on FR4 board.

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Forward Voltage at $I_F = 0.5\text{ A}$ at $I_F = 1\text{ A}$ at $I_F = 0.5\text{ A}, T_a = 100^\circ\text{C}$ at $I_F = 1\text{ A}, T_a = 100^\circ\text{C}$	V_F	0.51 0.62 0.46 0.61	V
Reverse Current at $V_R = 20\text{ V}$ at $V_R = 40\text{ V}$ at $V_R = 20\text{ V}, T_a = 100^\circ\text{C}$ at $V_R = 40\text{ V}, T_a = 100^\circ\text{C}$	I_R	10 20 5 13	μA μA mA mA



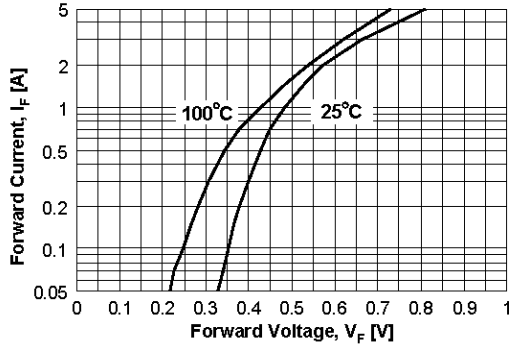


Figure 1. Forward Voltage Characteristics

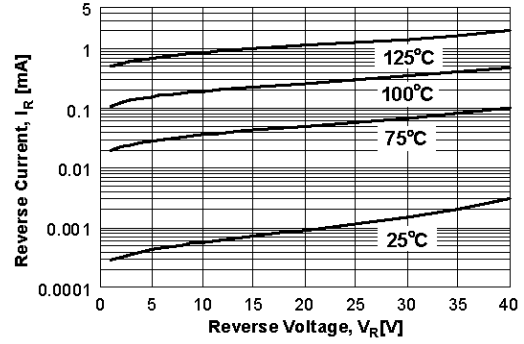


Figure 2. Reverse Current vs Reverse Voltage


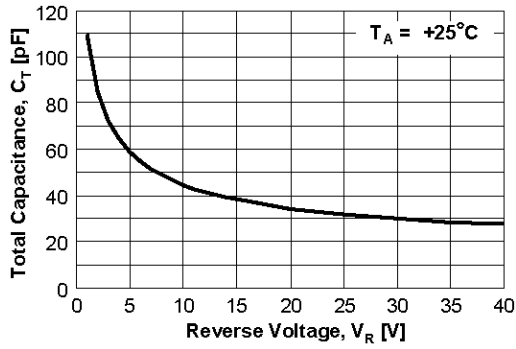


Figure 3. Total Capacitance




MBR0540W

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

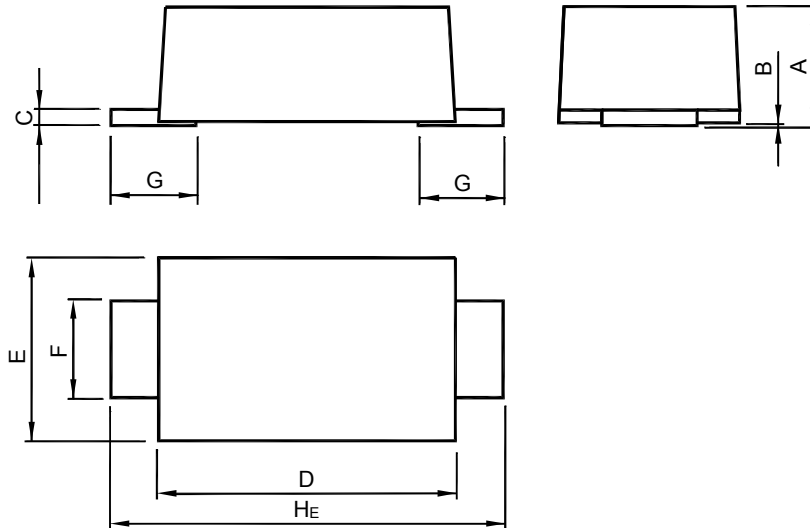


UNIT	A	B	C	D	E	F	G	H _E
mm	1.08	0.1	0.2	2.9	1.9	1.1	0.9	3.9
	0.88	0	0.1	2.6	1.7	0.8	0.7	3.5

Recommended Soldering Footprint

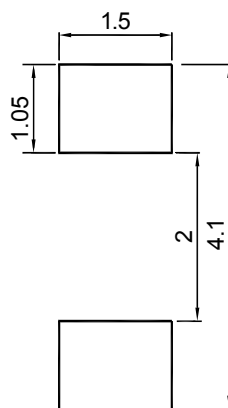

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)