



DC Output Buffered Modules

- **Compatible with 5 & 15 Volt Logic Systems**
- **Buffered Inverting and Non-Inverting Modules**

Buffered output modules contain additional internal amplification to reduce drive requirements to a level suitable for the MOS devices used in many micro-processor systems. To further reduce the need for additional interface components, they are available with both inverting and non-inverting inputs, for 5 volt or 15 volt logic.

INPUT SPECIFICATIONS

(All voltages referenced to pin 5)

	6311	6321	6341	6351
Nominal Input Voltage [Vdc]	5	5	15	15
Output Module Type	Non-Inverting	Inverting	Non-Inverting	Inverting
Must Turn On Voltage Range @pin 4 [Vdc]	0.0 - 0.8	2.4 - 6.0	0.0 - 2.0	8.0 - 18
Must Turn Off Voltage Range @pin 4 [Vdc]	2.4 - 6.0	0.0 - 0.8	8.0 - 18	0.0 - 2.0
Max. Input On-Current (Snk) @pin 4 [µA]	75 @0.8V 100 @0.0V	—	175 @2.0V 250 @0.0V	—
Max. Input On-Current (Source) @pin 4 [µA]	—	75 @2.4V 250 @6.0V	—	75 @8.0V 200 @18V
Max. Input Current For Output (Snk)	10	10	10	10
Off-State @pin 4 [µA] ② (Source)	10	10	10	10
Logic Supply Voltage Range [Vdc]	3.5 - 6.0	3.5 - 6.0	10 - 18	10 - 18
Max. Logic Supply Current (w/o LED) @5Vdc [mA] ①	20	20	25	25
Max. Logic Supply Current (w/ LED) @5Vdc [mA] ①	15	15	22	22

OUTPUT SPECIFICATIONS

Load Current Range @45° C [A]	0.02 - 3.5	0.02 - 3.5	0.02 - 3.5	0.02 - 3.5
Load Voltage Range [Vdc]	3.0 - 60	3.0 - 60	3.0 - 60	3.0 - 60
Max. Surge Current [A]	5.0	5.0	5.0	5.0
Max. On-State Voltage [Vdc]	1.5	1.5	1.5	1.5
Max. Off-State Leakage [mA]	1.0	1.0	1.0	1.0
Max. Turn On Time [µS]	100	100	100	100
Max. Turn Off Time [µS]	100	100	100	100
Transient Overvoltage [Vdc]	60	60	60	60

GENERAL NOTES

- ① LED optional. Placed in series with pin 3 for status indication.
- ② Max. allowable leakage current from driver maintain output off-state.
- ③ Inductive loads must be diode suppressed.

©1998 CRYDOM CORP Specifications subject to change without notice.

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280

Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com

WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191

UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close, Woolbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SJ

GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,

Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com




DC Output Buffered Modules



GENERAL SPECIFICATIONS



Min. Dielectric Input/Output (1 minute)	4,000 VRMS
Min. Isolation Resistance Input/Output (@500V)	10 ¹⁰ Ohms
Capacitance input to output	8 pF
Temperature Range — Operating	-40° C to 80° C
Temperature Range — Storage	-40° C to 125° C

CURRENT DERATING CURVE

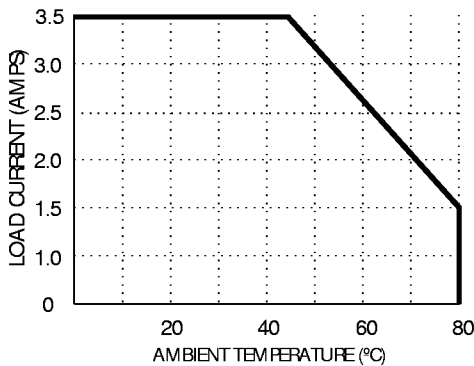

Max. Load Current vs. Temp.

WIRING & MECHANICAL DIAGRAMS

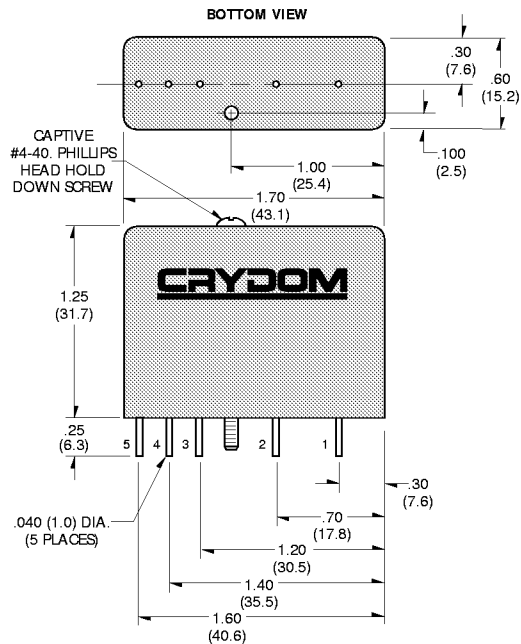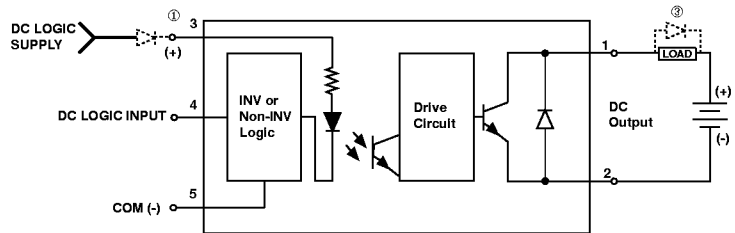

All dimensions are in inches (millimeters)

BUFFERED OUTPUT MODULES

A buffered non-inverting module turns on when pin 4 is held in the low state (logic 0), the same as standard modules driven in the sink mode. A buffered inverting module conversely turns on when pin 4 is held high (logic 1). In the absence of an input signal and/or logic supply (open Circuit), all models will be in the off-state.

Buffered modules may be used with standard 5 pin PB or MS mounting boards. However, the 3.3K pull-up resistor will add to the logic drive current of a non-inverting module and may be removed. For an inverting module, the resistor must be removed to avoid a false "on" command, unless a "normally closed" condition is desirable for use with a ground seeking (logic 0) signal source.

©1998 CRYDOM CORP Specifications subject to change without notice.

For recommended applications and more information contact:

USA: (800) 8 CRYDOM • (800) 827-9366 • (619) 715-7200 • fax (619) 715-7280

Crydom Corp, 9525 Chesapeake Drive, San Diego, CA 92123 • e-mail: sales@crydom.com

WEB SITE: <http://www.crydom.com> **FASTFAX Product Information:** (888) 267-9191

UK: (44)1202 812300 • fax (44)1202 812340 Crydom International Ltd., 85, Condor Close, Woolsbridge Industrial Estate, Three-Legged Cross, Wimborne, Dorset, England BH21 6SJ

GERMANY: (49) (0)6874 182580 • fax (49)(0)6874 182585 Crydom GmbH,

Gewerbegebiet Im Schachen, D-66687 Nunkirchen, Germany • e-mail: vertrieb@crydom.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Sensata](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#)