

My first Hirschmann:

The SPIDER family of switches.


- Large selection of entry level switches
- Compact design
- Simple rail installation
- Industry standard 24V supply voltage
- Plug & Play gets you up and running right away



HIRSCHMANN

A Belden Company

The dependable path to Industrial ETHERNET: Hirschmann's extended family of switches.

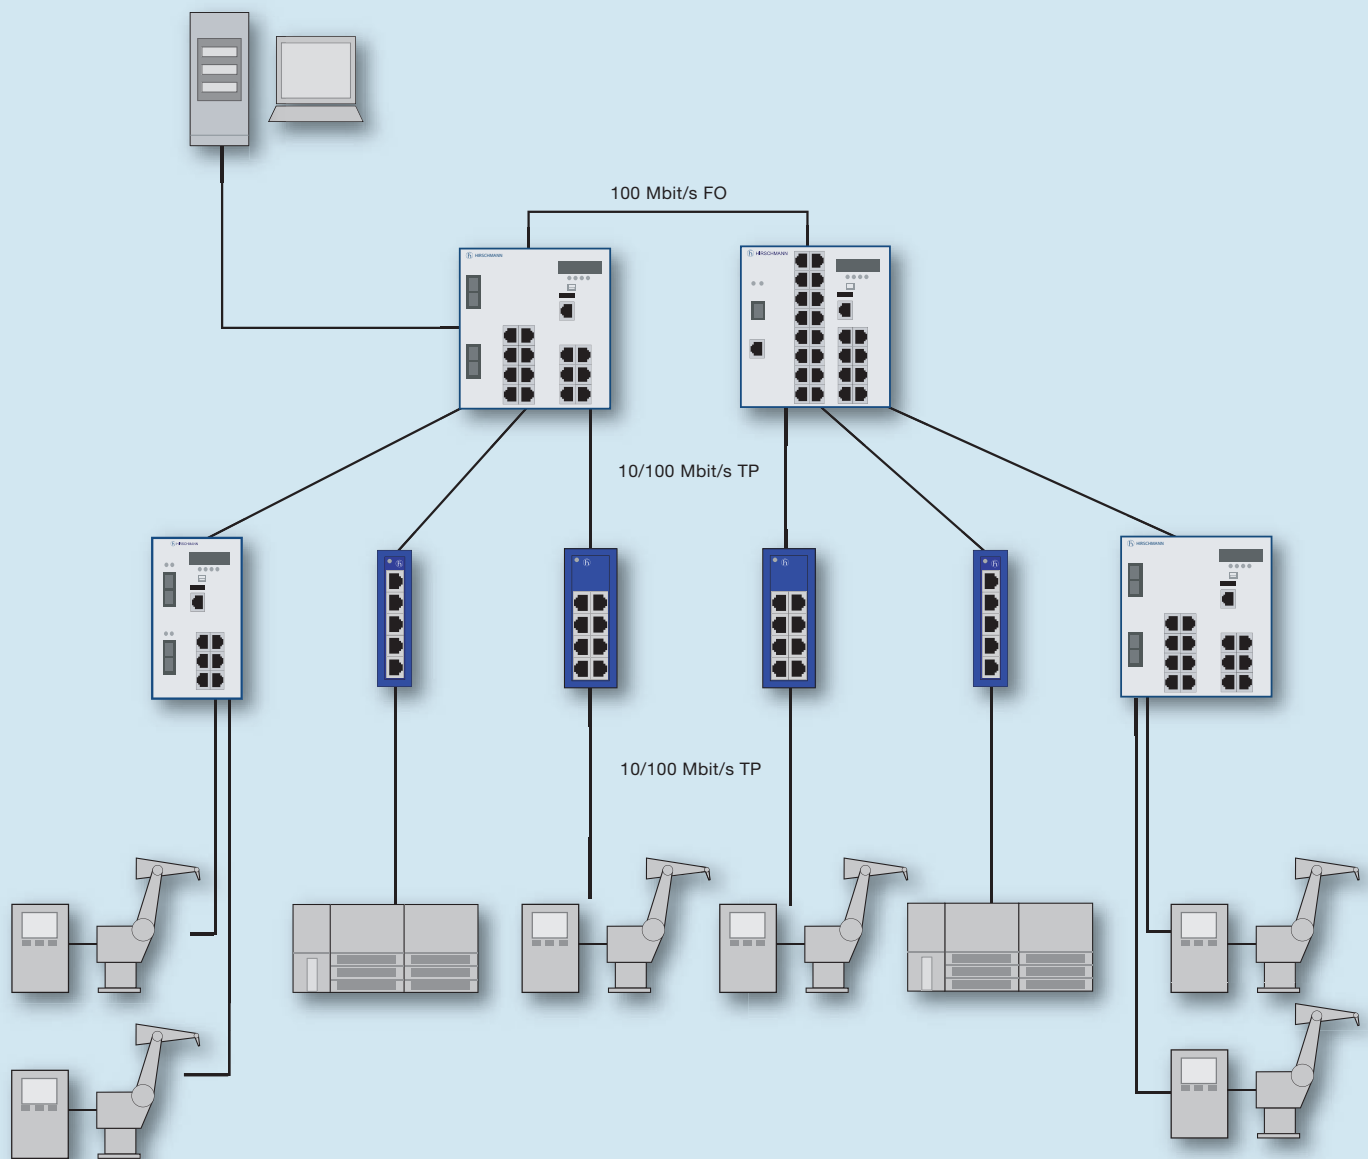

Applications


The SPIDER family is the ideal choice whenever you want to use a simple unmanaged switch to link ETHERNET nodes in a star or linear topology. You can also deploy SPIDER switches as a low-cost port expansion option on managed systems in large networks. Applications include process lines or machine manufacturing, for example printing machines. Fiber port versions support reliable data transfer over long distances and guarantee good communications

under extreme conditions in the presence of strong electromagnetic interference. These robust switches are the solution of choice when the application demands high EMC stability and good temperature resistance. IP 30 protection and excellent shock, vibration and temperature resistance ensure that these industrial entry level switches will keep running in harsh environments.

Requirements and solutions

Hirschmann developed the low-cost SPIDER switch family to provide a user-friendly pathway to Industrial ETHERNET at the device level in the network pyramid where there is a need for simple unmanaged switches. The third generation of Hirschmann plug & play entry level switches feature a universal layout and are available in a wide range of variations including switches with an extended temperature range (-40°C up to $+70^{\circ}\text{C}$) and e1 approval. The family also includes versions with one twisted pair and one fiber optic port or with three twisted pair ports.

There are 13 entry level switches in the SPIDER product family which can be used to quickly deploy low-cost star or linear network topologies over short or long distances. The Hirschmann portfolio covers the entire network pyramid right up to the layer 3 backbone switch. The SPIDER family defines the right entry point for any Industrial ETHERNET solution. You get one stop shopping from a company which stands for excellent quality and reliability.

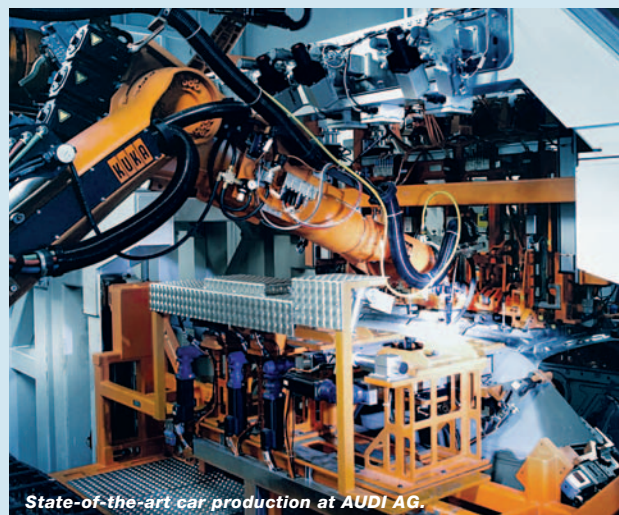

Product features

SPIDER switches comply with all applicable industry standards, and they are also suitable for onboard vehicle applications. All of the devices support 10/100 BASE-TX or -FX as well as auto-negotiation and auto-crossing functions. The optical ports are compatible with SC- or ST-connectors and are designed for single- or multimode transmission.

- Simple rail installation
- Industrial circuit design, UL approved
- Long service life (MTBF)
- e1 approval for use in vehicles (German Federal Bureau of Motor Vehicles)
- 24 V supply voltage
- Simple installation (plug & play)
- LED display of device and network status
- Low-cost entry level price
- Compact design for installation in distribution boxes
- Extended temperature range from -40°C up to $+70^{\circ}\text{C}$ (EEC models)

Low-cost combined with great versatility: Hirschmann SPIDER switches.

New versions

In addition to the familiar SPIDER 5TX, 8TX and 4TX/1FX switches, versions with single-mode port and switches with 3 and 2 ports are also now available.

New applications

New variations with one twisted pair and one fiber optic port used as stable store and forward switches can be used to replace conventional 10 or 100 Mbit/s converters.



New: extended temperature range

All switches are now available in extended range versions which will operate between -40° up to $+70^{\circ}$ C.

Familiar reliable functions

- Compact design
- Industry standard 24 V supply voltage
- Rail mounted
- Auto negotiation and auto-crossing functions take the pain out of installation

New approval

e1 approval for onboard vehicle applications



Hirschmann Competence Center

The Hirschmann Competence Center is the place to contact when you are looking for cost-effective total solutions. You get expert consulting, service and support from the pioneer in industrial network technology. Whether you need simple entry level switches or

complete solutions at the top end of the network pyramid, we would be pleased to discuss your individual Industrial ETHERNET requirements with you.



www.hicomcenter.com

SPIDER family
2 port media converter switches



Product description	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
		
Product description		
Description	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)
Port type and quantity	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets
Type	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
Order No.	943 890-001	943 927-001
More Interfaces		
Power supply/signaling contact	1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact
Network size – length of cable		
Twisted pair (TP)	0–100 m	0–100 m
Multimode fiber (MM) 50/125 µm	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km
Multimode fiber (MM) 62,5/125 µm	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km
Singlemode fiber (SM) 9/125 µm		
Singlemode fiber (LH) 9/125 µm (long haul transceiver)		
Network size – cascading		
Line-/star topology	Any	Any
Power requirements		
Operating voltage	9.6–32 VDC	9.6–32 VDC
Current consumption at 24 VDC	Max. 130 mA	Max. 130 mA
Power consumption	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC
Service		
Diagnostics	LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)
Redundancy		
Redundancy functions		
Ambient conditions		
Operating temperature	0°C up to +60°C	–40°C up to +70°C
Storage/transport temperature	–40°C up to +70°C	–40°C up to +85°C
Relative humidity (non-condensing)	10% up to 95%	10% up to 95%
MTBF	128.1 years; MIL-HDBK 217F: Gb 25°C	128.1 years; MIL-HDBK 217F: Gb 25°C
Mechanical construction		
Dimensions (W x H x D)	25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm
Mounting	DIN rail 35 mm	DIN rail 35 mm
Weight	105 g	105 g
Protection class	IP 30	IP 30
Mechanical stability		
IEC 60068-2-27 shock	15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks
IEC 60068-2-6 vibration	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.
EMC interference immunity		
EN 61000-4-2 electrostatic discharge (ESD)	6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge
EN 61000-4-3 electromagnetic field	10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)
EN 61000-4-4 fast transients (burst)	2 kV power line, 4 kV data line	2 kV power line, 4 kV data line
EN 61000-4-5 surge voltage	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line
EN 61000-4-6 conducted immunity	10 V (150–80 kHz)	10 V (150–80 kHz)
EMC emitted immunity		
FCC CFR47 Part 15	FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A
EN 55022	EN 55022 Class A	EN 55022 Class A
Approvals		
Safety of industrial control equipment	cUL 508 (E175531)	cUL 508 (E175531)
EMV regulations for assembly in vehicles		
Hazardous locations		
Employment in vehicles		
Safety of information technology equipment		
German Lloyd		
Scope of delivery and accessories		
Scope of delivery	Device, terminal block, operating manual	Device, terminal block, operating manual
Accessories to order separately	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame



Switches for linear and star topologies

SPIDER 1TX/1FX-SM	SPIDER 1TX/1FX-SM EEC	SPIDER 3TX-TAP
		
<p>Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)</p> <p>1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity</p> <p>1 x 100 BASE-FX, MM cable, SC sockets</p> <p>SPIDER 1TX/1FX-SM</p> <p>943 891-001</p>	<p>Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)</p> <p>1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity</p> <p>1 x 100 BASE-FX, MM cable, SC sockets</p> <p>SPIDER 1TX/1FX-SM EEC</p> <p>943 928-001</p>	<p>Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)</p> <p>3 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity</p> <p>SPIDER 3TX-TAP</p> <p>943 899-001</p>
1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact
0–100 m	0–100 m	0–100 m
<p>0–32.5 km,</p> <p>16 dB link budget at 1300 nm,</p> <p>A = 0.4 dB/km, 3 dB reserve, D = 3.5 ps/(nm x km)</p>	<p>0–32.5 km,</p> <p>16 dB link budget at 1300 nm,</p> <p>A = 0.4 dB/km, 3 dB reserve, D = 3.5 ps/(nm x km)</p>	
Any	Any	Any
9.6–32 VDC	9.6–32 VDC	9.6–32 VDC
Max. 130 mA	Max. 130 mA	Max. 100 mA
Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 2.2 W 7.5 Btu (IT)/h at 24 V DC
LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)
0 °C up to +60 °C	–40 °C up to +70 °C	0 °C up to +60 °C
–40 °C up to +70 °C	–40 °C up to +85 °C	–40 °C up to +70 °C
10 % up to 95 %	10 % up to 95 %	10 % up to 95 %
101.5 years; MIL-HDBK 217F: Gb 25° C	101.5 years; MIL-HDBK 217F: Gb 25° C	138.5 years; MIL-HDBK 217F: Gb 25° C
25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm
DIN rail 35 mm	DIN rail 35 mm	DIN rail 35 mm
105 g	105 g	113 g
IP 30	IP 30	IP 30
15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks
3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min.
1 g, 9–150 Hz, 10 cycles, 1 octave/min.	1 g, 9–150 Hz, 10 cycles, 1 octave/min.	1 g, 9–150 Hz, 10 cycles, 1 octave/min.
6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge
10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)
2 kV power line, 4 kV data line	2 kV power line, 4 kV data line	2 kV power line, 4 kV data line
Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line
10 V (150–80 kHz)	10 V (150–80 kHz)	10 V (150–80 kHz)
FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A
EN 55022 Class A	EN 55022 Class A	EN 55022 Class A
cUL 508 (E175531)	cUL 508 (E175531)	cUL 508 (E175531)
Device, terminal block, operating manual	Device, terminal block, operating manual	Device, terminal block, operating manual
Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame

Product description	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
		
Product description		
Description	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)
Port type and quantity	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets
Type	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
Order No.	943 890-001	943 927-001
More Interfaces		
Power supply/signaling contact	1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact
Network size – length of cable		
Twisted pair (TP)	0–100 m	0–100 m
Multimode fiber (MM) 50/125 µm	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km
Multimode fiber (MM) 62,5/125 µm	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km
Singlemode fiber (SM) 9/125 µm		
Singlemode fiber (LH) 9/125 µm (long haul transceiver)		
Network size – cascading		
Line-/star topology	Any	Any
Power requirements		
Operating voltage	9.6–32 VDC	9.6–32 VDC
Current consumption at 24 VDC	Max. 130 mA	Max. 130 mA
Power consumption	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC
Service		
Diagnostics	LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)
Redundancy		
Redundancy functions		
Ambient conditions		
Operating temperature	0°C up to +60°C	–40°C up to +70°C
Storage/transport temperature	–40°C up to +70°C	–40°C up to +85°C
Relative humidity (non-condensing)	10% up to 95%	10% up to 95%
MTBF	128.1 years; MIL-HDBK 217F: Gb 25°C	128.1 years; MIL-HDBK 217F: Gb 25°C
Mechanical construction		
Dimensions (W x H x D)	25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm
Mounting	DIN rail 35 mm	DIN rail 35 mm
Weight	105 g	105 g
Protection class	IP 30	IP 30
Mechanical stability		
IEC 60068-2-27 shock	15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks
IEC 60068-2-6 vibration	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.
EMC interference immunity		
EN 61000-4-2 electrostatic discharge (ESD)	6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge
EN 61000-4-3 electromagnetic field	10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)
EN 61000-4-4 fast transients (burst)	2 kV power line, 4 kV data line	2 kV power line, 4 kV data line
EN 61000-4-5 surge voltage	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line
EN 61000-4-6 conducted immunity	10 V (150–80 kHz)	10 V (150–80 kHz)
EMC emitted immunity		
FCC CFR47 Part 15	FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A
EN 55022	EN 55022 Class A	EN 55022 Class A
Approvals		
Safety of industrial control equipment	cUL 508 (E175531)	cUL 508 (E175531)
EMV regulations for assembly in vehicles		
Hazardous locations		
Employment in vehicles		
Safety of information technology equipment		
German Lloyd		
Scope of delivery and accessories		
Scope of delivery	Device, terminal block, operating manual	Device, terminal block, operating manual
Accessories to order separately	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame

SPIDER family
2 port media converter switches

Product description	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
		
Product description		
Description	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)
Port type and quantity	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets
Type	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
Order No.	943 890-001	943 927-001
More Interfaces		
Power supply/signaling contact	1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact
Network size – length of cable		
Twisted pair (TP)	0–100 m	0–100 m
Multimode fiber (MM) 50/125 µm	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km
Multimode fiber (MM) 62,5/125 µm	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km
Singlemode fiber (SM) 9/125 µm		
Singlemode fiber (LH) 9/125 µm (long haul transceiver)		
Network size – cascading		
Line-/star topology	Any	Any
Power requirements		
Operating voltage	9.6–32 VDC	9.6–32 VDC
Current consumption at 24 VDC	Max. 130 mA	Max. 130 mA
Power consumption	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC
Service		
Diagnostics	LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)
Redundancy		
Redundancy functions		
Ambient conditions		
Operating temperature	0°C up to +60°C	–40°C up to +70°C
Storage/transport temperature	–40°C up to +70°C	–40°C up to +85°C
Relative humidity (non-condensing)	10% up to 95%	10% up to 95%
MTBF	128.1 years; MIL-HDBK 217F: Gb 25°C	128.1 years; MIL-HDBK 217F: Gb 25°C
Mechanical construction		
Dimensions (W x H x D)	25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm
Mounting	DIN rail 35 mm	DIN rail 35 mm
Weight	105 g	105 g
Protection class	IP 30	IP 30
Mechanical stability		
IEC 60068-2-27 shock	15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks
IEC 60068-2-6 vibration	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.
EMC interference immunity		
EN 61000-4-2 electrostatic discharge (ESD)	6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge
EN 61000-4-3 electromagnetic field	10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)
EN 61000-4-4 fast transients (burst)	2 kV power line, 4 kV data line	2 kV power line, 4 kV data line
EN 61000-4-5 surge voltage	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line
EN 61000-4-6 conducted immunity	10 V (150–80 kHz)	10 V (150–80 kHz)
EMC emitted immunity		
FCC CFR47 Part 15	FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A
EN 55022	EN 55022 Class A	EN 55022 Class A
Approvals		
Safety of industrial control equipment	cUL 508 (E175531)	cUL 508 (E175531)
EMV regulations for assembly in vehicles		
Hazardous locations		
Employment in vehicles		
Safety of information technology equipment		
German Lloyd		
Scope of delivery and accessories		
Scope of delivery	Device, terminal block, operating manual	Device, terminal block, operating manual
Accessories to order separately	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame

Product description	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
		
Product description		
Description	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)	Entry level Industrial ETHERNET rail switch, store and forward switching mode, ETHERNET (10 Mbit/s) and Fast-ETHERNET (100 Mbit/s)
Port type and quantity	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets	1 x 10/100 BASE-TX, TP-cable, RJ 45 sockets, auto-crossing, auto-negotiation, auto-polarity 1 x 100 BASE-FX, MM cable, SC sockets
Type	SPIDER 1TX/1FX	SPIDER 1TX/1FX EEC
Order No.	943 890-001	943 927-001
More Interfaces		
Power supply/signaling contact	1 plug-in terminal block, 3-pin, no signal contact	1 plug-in terminal block, 3-pin, no signal contact
Network size – length of cable		
Twisted pair (TP)	0–100 m	0–100 m
Multimode fiber (MM) 50/125 µm	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km	0–5000 m, 8 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 800 MHz x km
Multimode fiber (MM) 62,5/125 µm	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km	0–4000 m, 11 dB link budget at 1300 nm, A = 1 dB/km, 3 dB reserve, B = 500 MHz x km
Singlemode fiber (SM) 9/125 µm		
Singlemode fiber (LH) 9/125 µm (long haul transceiver)		
Network size – cascading		
Line-/star topology	Any	Any
Power requirements		
Operating voltage	9.6–32 VDC	9.6–32 VDC
Current consumption at 24 VDC	Max. 130 mA	Max. 130 mA
Power consumption	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC	Max. 3.0 W 10.2 Btu (IT)/h at 24 V DC
Service		
Diagnostics	LEDs (power, link status, data, data rate)	LEDs (power, link status, data, data rate)
Redundancy		
Redundancy functions		
Ambient conditions		
Operating temperature	0°C up to +60°C	–40°C up to +70°C
Storage/transport temperature	–40°C up to +70°C	–40°C up to +85°C
Relative humidity (non-condensing)	10% up to 95%	10% up to 95%
MTBF	128.1 years; MIL-HDBK 217F: Gb 25°C	128.1 years; MIL-HDBK 217F: Gb 25°C
Mechanical construction		
Dimensions (W x H x D)	25 mm x 114 mm x 79 mm	25 mm x 114 mm x 79 mm
Mounting	DIN rail 35 mm	DIN rail 35 mm
Weight	105 g	105 g
Protection class	IP 30	IP 30
Mechanical stability		
IEC 60068-2-27 shock	15 g, 11 ms duration, 18 shocks	15 g, 11 ms duration, 18 shocks
IEC 60068-2-6 vibration	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.	3.5 mm, 3–9 Hz, 10 cycles, 1 octave/min. 1 g, 9–150 Hz, 10 cycles, 1 octave/min.
EMC interference immunity		
EN 61000-4-2 electrostatic discharge (ESD)	6 kV contact discharge, 8 kV air discharge	6 kV contact discharge, 8 kV air discharge
EN 61000-4-3 electromagnetic field	10 V/m (80–2000 MHz)	10 V/m (80–2000 MHz)
EN 61000-4-4 fast transients (burst)	2 kV power line, 4 kV data line	2 kV power line, 4 kV data line
EN 61000-4-5 surge voltage	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line	Power line: 2 kV (line/earth), 1 kV (line/line), 1 kV data line
EN 61000-4-6 conducted immunity	10 V (150–80 kHz)	10 V (150–80 kHz)
EMC emitted immunity		
FCC CFR47 Part 15	FCC CFR47 Part 15 Class A	FCC CFR47 Part 15 Class A
EN 55022	EN 55022 Class A	EN 55022 Class A
Approvals		
Safety of industrial control equipment	cUL 508 (E175531)	cUL 508 (E175531)
EMV regulations for assembly in vehicles		
Hazardous locations		
Employment in vehicles		
Safety of information technology equipment		
German Lloyd		
Scope of delivery and accessories		
Scope of delivery	Device, terminal block, operating manual	Device, terminal block, operating manual
Accessories to order separately	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame	Rail power supply RPS 30, RPS 80 EEC or RPS 120 EEC, 19" installation frame



HIRSCHMANN

A Belden Company

Hirschmann. Simply a good Connection.



- Production bases
- Sales subsidiaries
- Selected distribution partners

Hirschmann Automation and Control GmbH

Industrial ETHERNET

FiberINTERFACES

Industrial Connectors

Electronic Control Systems

WWW.HIRSCHMANN.COM

"The information/details in this publication merely contain general descriptions or performance factors which, when applied in an actual situation, do not always correspond with the described form, and may be amended by way of the further development of products. The desired performance factors shall only be deemed binding if these are expressly agreed on conclusion of the contract.

Please note that some characteristics of the recommended accessory parts may differ from the appropriate product. This might limit the possible operating conditions for the entire system."

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)