

3-Pin Microprocessor Reset Circuits

Description

The JY809 microprocessor supervisory circuit can be used to monitor the power supplies in microprocessor and digital systems. It provides a reset to the microprocessor during power-up, power-down, and brown-out conditions.


The function of the JY809 is to monitor the V_{CC} supply voltage, and assert a reset signal whenever this voltage declines below the factory-programmed reset threshold. The reset signal remains asserted for 250ms after V_{CC} rises above the threshold. The JY809 has an active-low $\overline{\text{RESET}}$ output.

With a low supply current of only $2\mu\text{A}$ (Typ.), the JY809 are ideal for use in portable equipment. The JY809 is available in the 3-pin SOT23 package.

Features

- Precise monitoring of 2.7V, 3.0V, 3.3V and 5.0V supplies
- 140ms min. Power-On Reset pulse width, 250ms typical, has an active-low $\overline{\text{RESET}}$ Output
- Guaranteed $\overline{\text{RESET}}$ Output valid for $V_{CC} \geq 1.1\text{V}$
- Low Supply Current, $2\mu\text{A}$ Typ.
- Available in small SOT23 package
- No external components needed
- Specified over full temperature range -40°C to $+105^\circ\text{C}$

Package

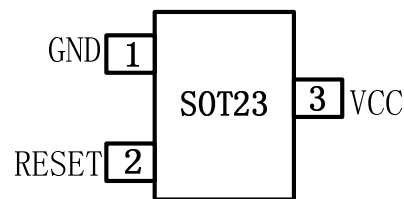

Applications

- Microprocessor Systems
- Computers
- Controllers
- Intelligent Instruments
- Portable/Battery-Powered Equipment
- Automotive



Typical Application

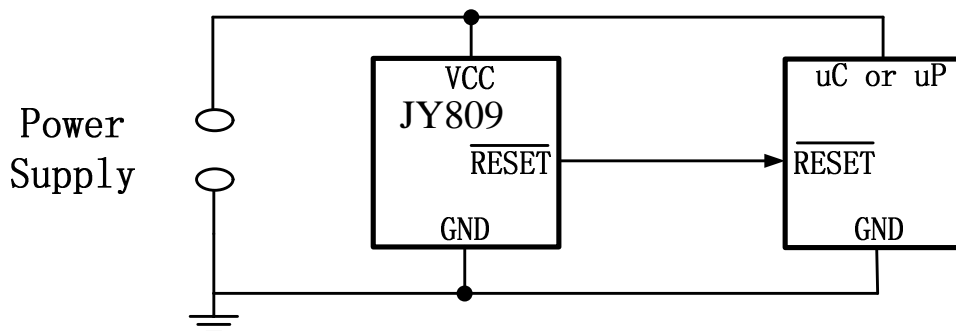


Figure 1 Typical Application

Function Diagram

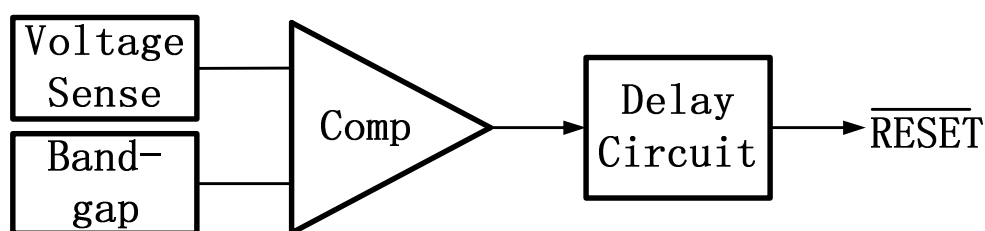


Figure 2 Function Diagram

PIN Description

Pin No.	Pin Name	Description
1	GND	Ground reference
2	$\overline{\text{RESET}}$	Active-low output. $\overline{\text{RESET}}$ remains low while V_{CC} is below the reset threshold, and for 250ms after V_{CC} rises above the reset threshold.
3	V_{CC}	Supply Voltage

Absolute Maximum Ratings

V_{CC}	-0.3V to 6.0V	Power Dissipation ($T_A = 70^\circ\text{C}$)	320mW
$\overline{\text{RESET}}$	-0.3V to ($V_{CC} + 0.3\text{V}$)	(Derate 4mW/ $^\circ\text{C}$ above 70°C)	
Input Current at V_{CC}	20mA	Operating Temperature Range.....	-40°C to 105°C
Output Current: $\overline{\text{RESET}}$	20mA	Storage Temperature Range.....	-65°C to 160°C
Rate of Rise at V_{CC}	100V/ μs	Lead Temperature (soldering, 10 sec)	260°C

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability

Electrical Characteristics

Unless otherwise noted V_{CC} is over the full voltage range, $T_A = -40^\circ\text{C}$ to 105°C . Typical values at $T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$ for L/M/J devices, $V_{CC} = 3.3\text{V}$ for T/S devices and $V_{CC} = 3\text{V}$ for R devices.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage (V_{CC}) Range	V_{CC}	$T_A = 0^\circ\text{C}$ to 70°C $T_A = -40^\circ\text{C}$ to 105°C	1.1 1.2		5.5 5.5	V
Supply Current	I_{CC}	$T_A = -40^\circ\text{C}$ to 85°C $V_{CC} < 5.5\text{V}$, L/M/J $T_A = -40^\circ\text{C}$ to 85°C $V_{CC} < 3.6\text{V}$, R/S/T $T_A = 85^\circ\text{C}$ to 105°C $V_{CC} < 5.5\text{V}$, L/M/J $T_A = 85^\circ\text{C}$ to 105°C $V_{CC} < 3.6\text{V}$, R/S/T		2.5 1.5	5 4 10 8	μA
Reset Threshold	V_{TH}	L devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C M devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C J devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C T devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C S devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C R devices $T_A = 25^\circ\text{C}$ $T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C	4.56 4.50 4.4 4.31 4.25 4.16 3.93 3.89 3.80 3.04 3.00 2.92 2.89 2.85 2.78 2.59 2.55 2.50	4.63 4.38 4.00 3.08 2.93 2.63	4.70 4.75 4.86 4.45 4.50 4.56 4.06 4.10 4.20 3.11 3.15 3.23 2.96 3.00 3.08 2.66 2.70 2.76	V
Reset Threshold Stability				30		ppm/ $^\circ\text{C}$
V_{CC} to Reset Delay		$V_{CC} = V_{TH}$ to ($V_{TH} - 100\text{mV}$)		20		μs
Reset Active Timeout Period	T_{OL}	$T_A = -40^\circ\text{C}$ to 85°C $T_A = 85^\circ\text{C}$ to 105°C	140 100	250	560 840	mS
RESET Output Voltage Low	V_{OL}	$V_{CC} = V_{TH}$ min., $I_{SINK} = 1.2\text{mA}$, R/S/T $V_{CC} = V_{TH}$ min., $I_{SINK} = 3.2\text{mA}$, L/M/J $V_{CC} > 1.1\text{V}$, $I_{SINK} = 50\mu\text{A}$			0.1 0.2 0.1	V
RESET Output Voltage High	V_{OH}	$V_{CC} = V_{TH}$ max, $I_{SOURCE} = 500\mu\text{A}$, R/S/T $V_{CC} = V_{TH}$ max, $I_{SOURCE} = 800\mu\text{A}$, L/M/J	0.9 V_{CC} $V_{CC} - 1.5$			V

Detailed Descriptions

Reset Timing

The reset signal is asserted–low for the JY809 –when the V_{CC} signal falls below the threshold trip voltage and remains asserted for 140ms minimum after the VCC has risen above the threshold.

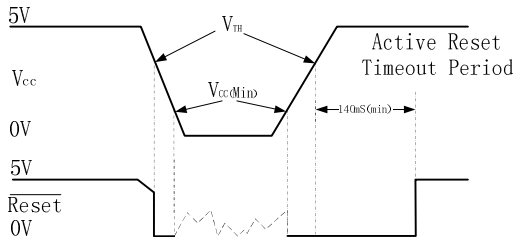


Figure 3 Reset Timing Diagram

Negative V_{CC} Transients

The JY809 protects μ Ps from brownouts and low V_{CC} . Short duration transients of 100mV amplitude and 20 μ s or less duration typically do not cause a false RESET.

Valid Reset with V_{CC} under 1.1V

To ensure logic inputs connected to the JY809 RESET pin are in a known state when V_{CC} is under 1.1V, a 100k Ω pull-down resistor at RESET is needed. The value is not critical.

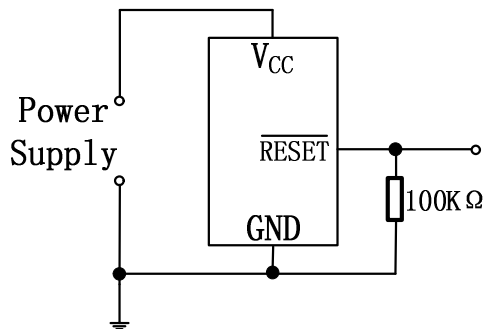


Figure 4 RESET Valid with V_{CC} Under 1.1V

Bi-directional Reset Pin Interfacing

The JY809 can interface with μ P/ μ C bi-directional reset pins by connecting a 4.7k Ω resistor in series with the JY809 reset output and the μ P/ μ C bi-directional reset pin.

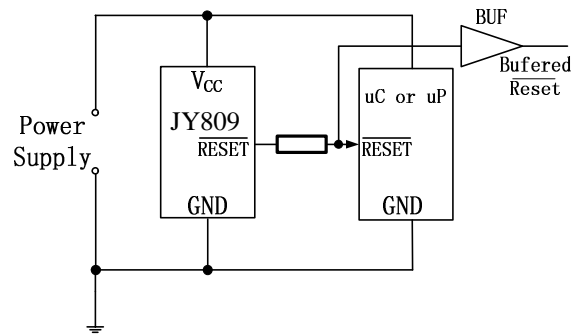


Figure 5 Bi-directional Reset Pin Interfacing


Order Information

Part Number	Top Mark	Package	Description
JY809ES3 -R	9R/09R/09R.	SOT23-3L	2.63V
JY809ES3 -S	9S/09S/09S.	SOT23-3L	2.93V
JY809ES3 -T	09T/09T.	SOT23-3L	3.08V
JY809ES3 -M	09M	SOT23-3L	4.38V

Packaging Information

SOT23-3L

MSL-3

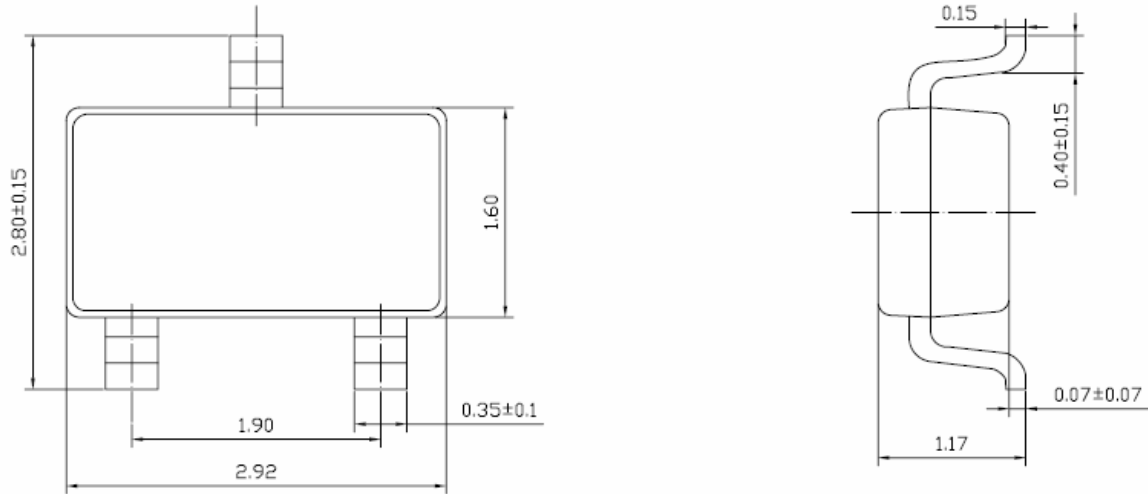

All dimensions in millimeters


Important Notice

TITAN Microelectronics Co.Ltd. reserves the right to make changes without further notice to any products or specifications herein. TITAN Microelectronics Co.Ltd. does not assume any responsibility for use of any its products for any particular purpose, nor does TITAN Microelectronics Co.Ltd. assume any liability arising out of the application or use of any its products or circuits. TITAN Microelectronics Co.Ltd. does not convey any license under its patent rights or other rights nor the rights of others.

Carrier Dimensions
SOT23-3L

PKG TYPE	W	P	E	F	D	D1	Po
SOT-23	8.00	4.00	1.75	3.50	1.50	1.00	4.00
Tolerance	+0.3/-0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

Po10	P2	A0	B0	K0	T
40.00	2.00	3.15	2.77	1.22	0.20
±0.2	±0.05	±0.1	±0.1	±0.1	±0.02

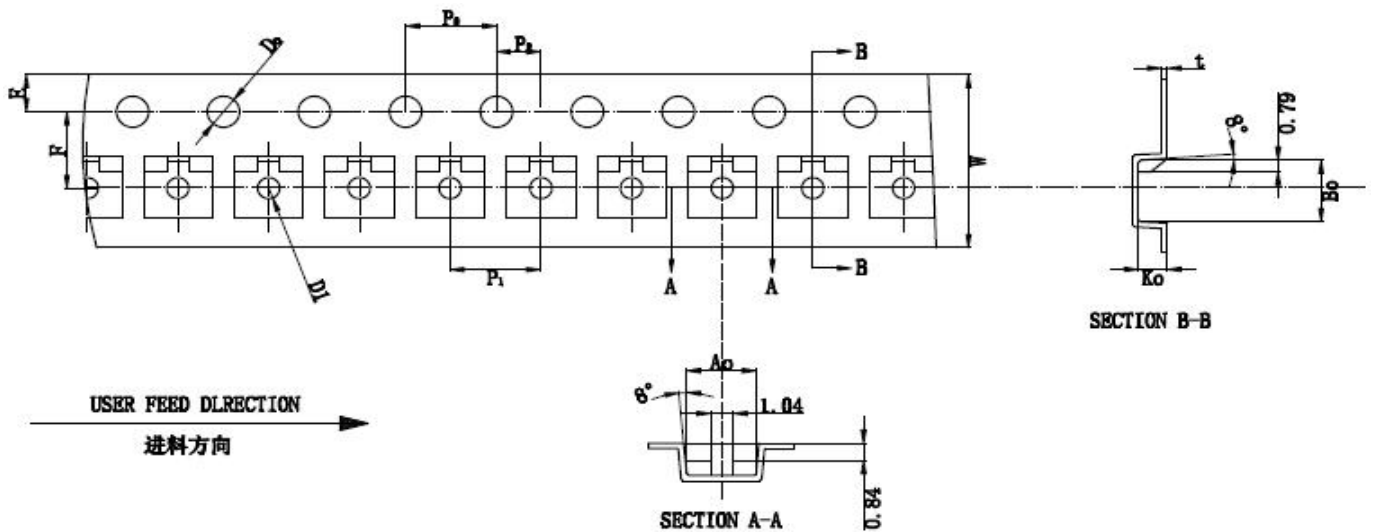

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Supervisory Circuits](#) category:

Click to view products by [Shenzhen JingYang](#) manufacturer:

Other Similar products are found below :

[CAT853STBI-T3](#) [RT9818C-27GU3](#) [DS1232L](#) [NCV302HSN45T1G](#) [STM6710FWB7F](#) [PT7M6127NLTA3EX](#) [XC6118C25AGR-G](#)
[ISL88011IH526Z-TK](#) [ISL88013IH529Z-TK](#) [ISL88705IP846Z](#) [ISL88706IP831Z](#) [ISL88708IB844Z](#) [ISL88708IP831Z](#) [TCM811MERCTR](#)
[X40420S14-A](#) [X40421S14-C](#) [X40430S14-A](#) [X40430S14I-A](#) [X40430S14I-B](#) [X40431S14-A](#) [X40431S14-B](#) [X40431S14-C](#) [X40431S14I-A](#)
[X40431S14I-B](#) [X40431S14I-C](#) [X4043P-2.7](#) [X4043PI-2.7](#) [X4043S8-2.7T1](#) [X4043S8IZ-2.7](#) [X4043S8IZT1](#) [X4043S8T1](#) [X4045P](#) [X4045PI](#)
[X4045PI-2.7](#) [X4045S8-2.7T1](#) [X4045S8IZ](#) [X4045S8T1](#) [X4163P](#) [X4163P-2.7](#) [X4163PI](#) [X4163PI-2.7](#) [X4163S8](#) [X4165P](#) [X4165P-2.7](#)
[X4165PI](#) [X4165PI-2.7](#) [X4165S8I-2.7](#) [X4283S8I](#) [X4323S8-2.7](#) [X4323S8I-2.7](#)