



Switching Diodes

FEATURES

- Low forward voltage : $V_F(3) = 0.9\text{ V(Typ.)}$
- Fast reverse recovery time: $t_{rr} = 1.6\text{ ns(Typ.)}$
- Small Total Capacitance : $C_T = 0.9\text{ pF(Typ.)}$

MARKING: B3

SOT-23



Maximum Ratings @ $T_a=25^\circ\text{C}$

Parameter	Symbol	Value	Unit
Peak Reverse voltage	V_{RM}	85	V
DC Blocking Voltage	V_R	80	V
Average Rectified Output Current	I_o	100	mA
Peak forward surge current	I_{FM}	300	mA
Power Dissipation	P_D	150	mW
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical Characteristics@ $T_a=25^\circ\text{C}$

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V_R	$I_R=100\mu\text{A}$	80			V
Forward voltage	V_{F1}	$I_F=1\text{ mA}$		0.6		V
	V_{F2}	$I_F=10\text{mA}$		0.72		V
	V_{F3}	$I_F=100\text{mA}$		0.9	1.2	V
Reverse voltage leakage current	I_{R1}	$V_R=30\text{V}$			0.1	μA
	I_{R2}	$V_R=80\text{V}$			0.5	μA
Capacitance between terminals	C_T	$V_R=0\text{V}, f=1\text{MHz}$		0.9	3.0	pF
Reverse recovery time	t_{rr}	$I_F=10\text{mA}$		1.6	4.0	ns

Fig.1 Power Derating Curve

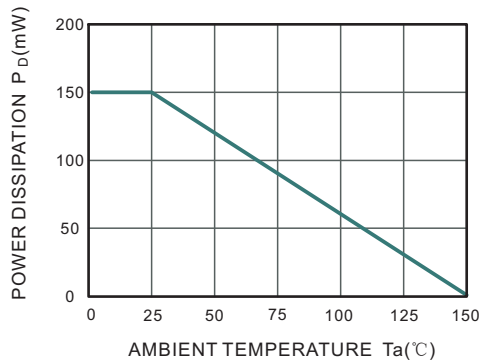


Fig.2 Reverse Characteristics

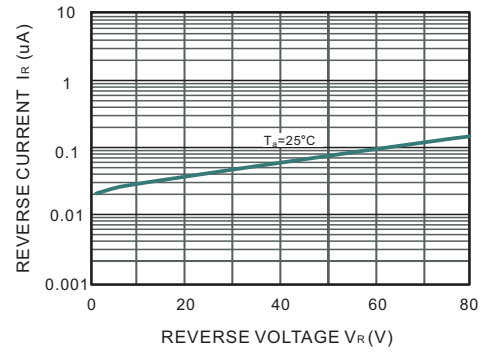


Fig.3 Forward Characteristics



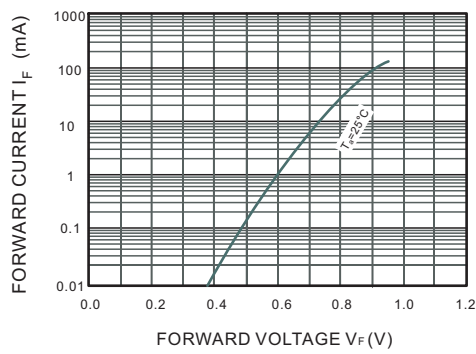



Fig.4 Capacitance Characteristics

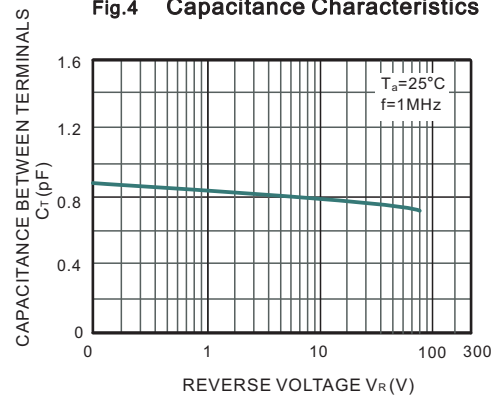

SOT-23 Package Outline Dimensions

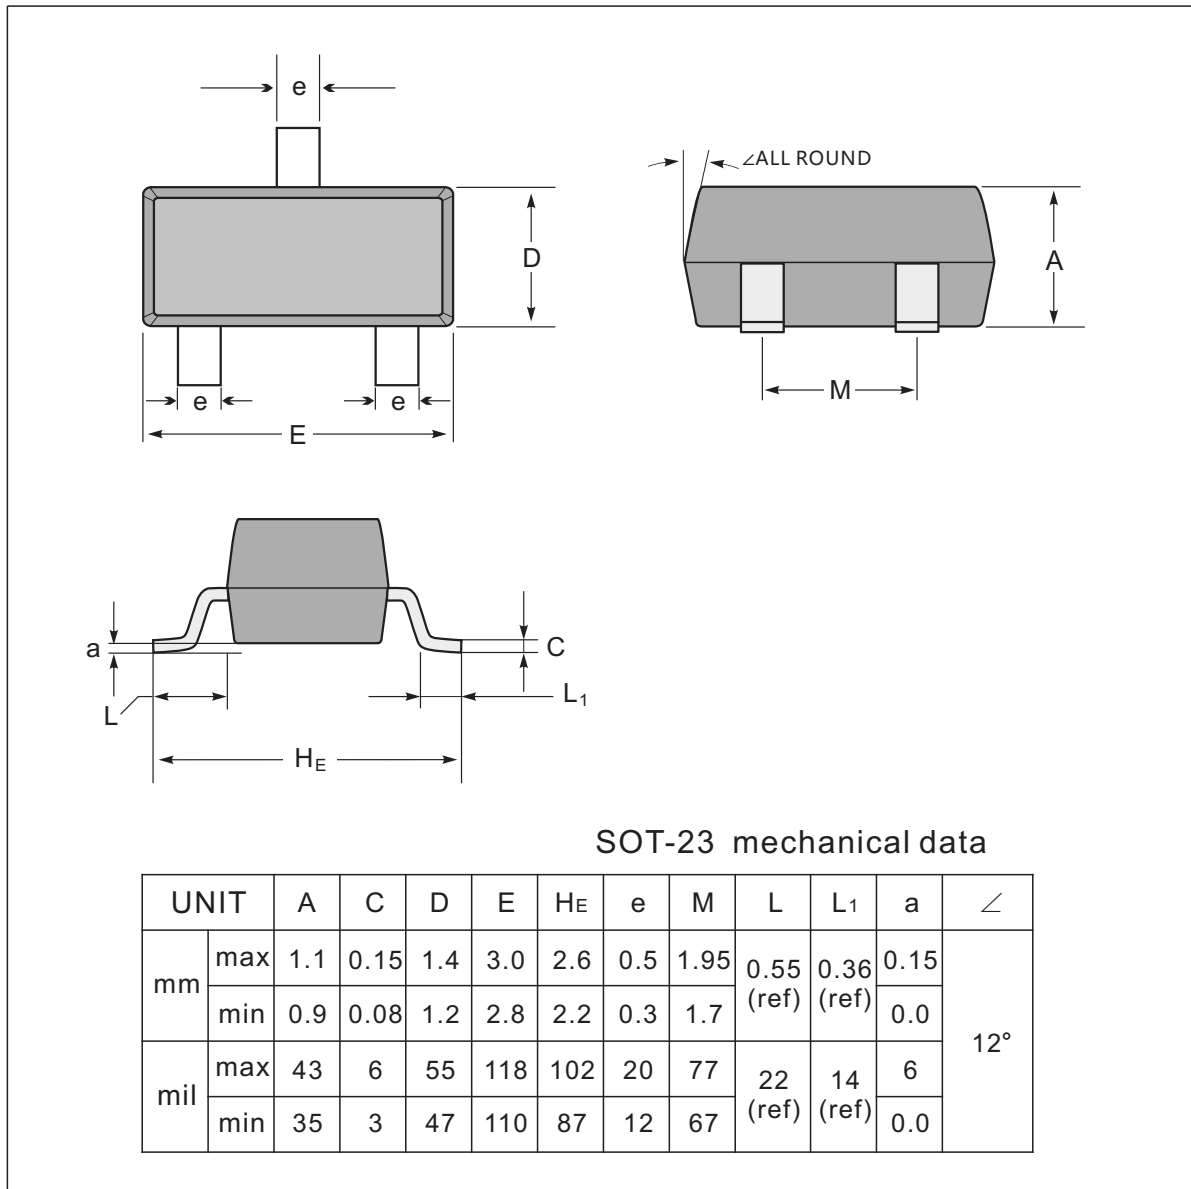

The recommended mounting pad size

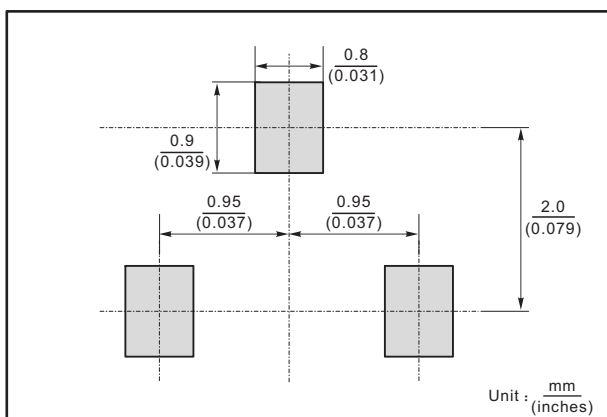

Marking

Type number	Marking code
1SS184	B3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Shikues manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4153-1](#)
[JAN1N4454-1](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#)
[1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#)
[1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#)